




Technical datasheet

N307ET2XC3

Single row cylindrical roller bearings

Single row cylindrical roller bearing, floating, separable, polyamide cage

Visual(s)

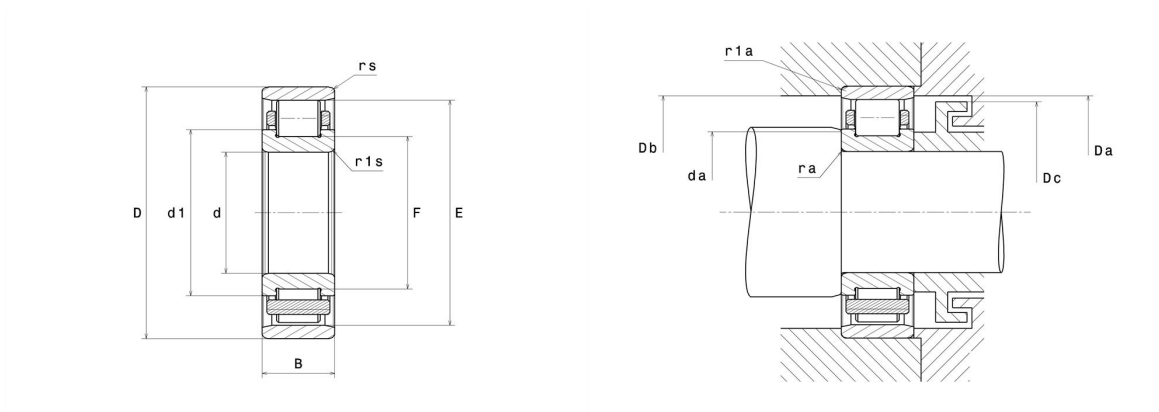

Product definition

d	35 mm
D	80 mm
B	21 mm
E	70.2 mm
F	46.2 mm
d1	51 mm
rs min	1.5 mm
r1s min	1.1 mm
Radial clearance class	C3
Mass (without HJ ring)	0.48 kg
Brand	NTN

Product performance

Dynamic load, C	71 kN
Static load, C0	71 kN
Fatigue limit load, Cu	8.7 kN
Nlim (oil)	9,600 rpm
Nlim (grease)	8,100 rpm
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.4 Hz
Characteristic rolling element frequency, BSF	4.64 Hz
Characteristic outer ring frequency, BPF0	5.16 Hz
Characteristic inner ring frequency, BPFI	7.84 Hz

Abutment dimensions

da min	43 mm
Da max	73.5 mm
Db min	71.4 mm
Dc max	68.4 mm
ra max	1.5 mm
r1a max	1 mm

Calculation factors

Equivalent dynamic radial load

$$P = Fr$$

Equivalent static radial load

$$Po = Fr$$