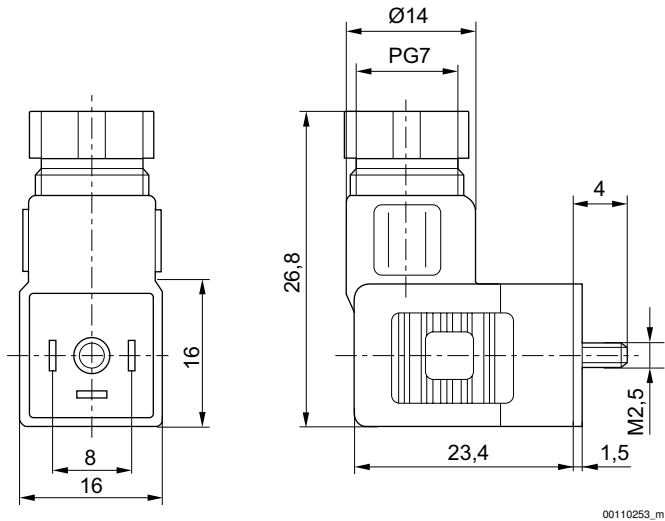


Series 490
Accessories

Fig. 3




Connector with cable, Series CN1
▶ ISO 15217, form C ▶ with cable ▶ 8 mm



Ambient temperature min./max.	-20 °C / +80 °C
Protection class	IP67
Tightening torque for mounting screws	0.4 Nm
Materials:	
Seals	caoutchouc/butadiene caoutchouc



24154

Technical Remarks										
■ The specified protection class is only valid in assembled and tested state.										

	Operational voltage max.		Max. current	Protective circuit	Contact assignment	LED status display	Cable	Weight	Fig.	Part No.
	[V AC]	[V DC]	[A]				[m]	[kg]		
	230	230	6	-	2+E	-	3	0.183	Fig. 1	1834484212
							3	0.183	Fig. 2	1834484213
							5	0.308	Fig. 1	1834484214
							5	0.308	Fig. 2	1834484215

Series 490

Accessories

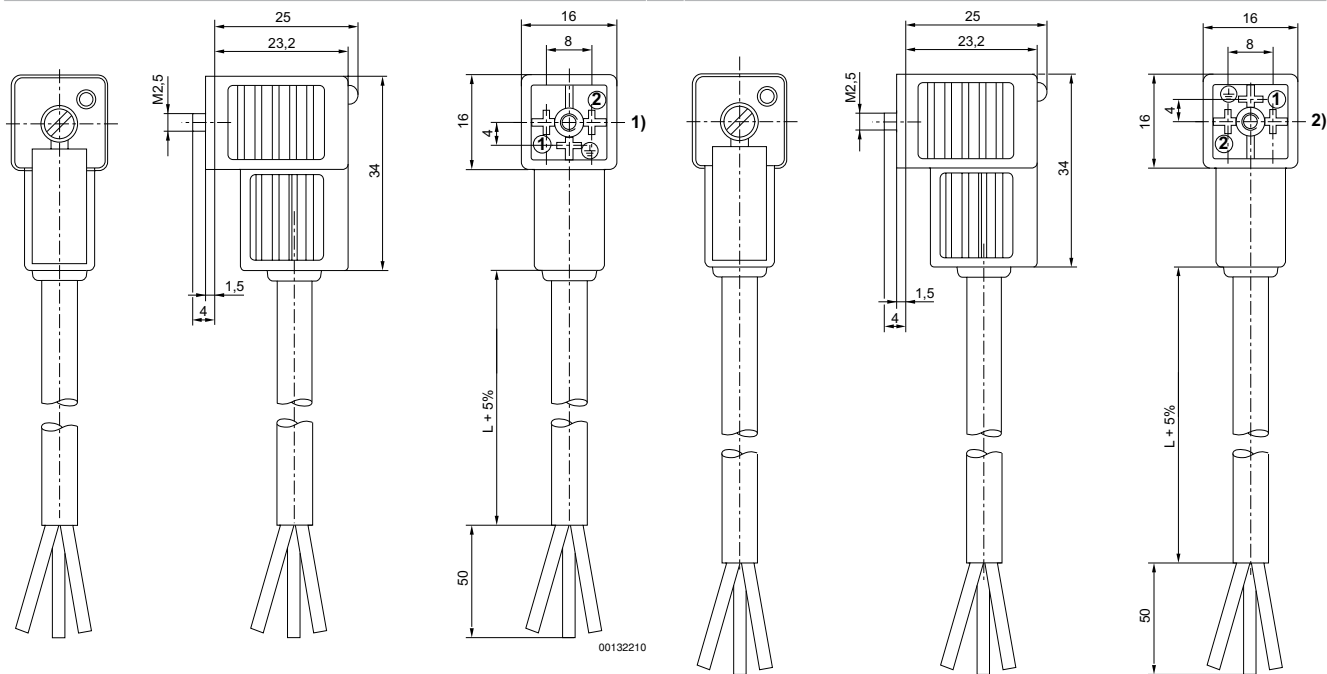
	Operational voltage max.		Max. current	Protective circuit	Contact assignment	LED status display	Cable	Weight	Fig.	Part No.
	[V AC]	[V DC]	[A]				[m]	[kg]		
	24	24	6	Z-diode	2+E	Yellow	3	0.185	Fig. 1	1834484204
							3	0.185	Fig. 2	1834484205
							5	0.292	Fig. 1	1834484206
							5	0.298	Fig. 2	1834484207
	230	230	6	Varistor	2+E	Yellow	3	0.171	Fig. 1	1834484208
							3	0.194	Fig. 2	1834484209
							5	0.297	Fig. 1	1834484210
							5	0.285	Fig. 2	1834484211

Part No.	Note
1834484212 1834484213 1834484214 1834484215	-
1834484204 1834484205 1834484206 1834484207	1)
1834484208 1834484209 1834484210 1834484211	1)

1) Scope of delivery incl. flat gasket

Fig. 1

Fig. 2



1) 0° female insert

2) 180° female insert

Part numbers marked in bold are available from the central warehouse in Germany, see the shopping basket for more detailed information

Pneumatics catalog, online PDF, as of 2016-07-26, ©AVENTICS S.à r.l., subject to change