

ISO Cylinder: Standard/Non-rotating Type Double Acting, Single/Double Rod

Series C85

ø8, ø10, ø12, ø16, ø20, ø25

How to Order

Double acting Single rod	C D 85	K N 16 40 C J A R2
Double acting Double rod	C D 85 W	E 16 40 C JJ B

Built-in magnet

Nil	None
D	Built-in magnet

Type

Nil	Standard
K	Non-rotating rod (Rubber cushion only)

Mounting style

Symbol	Mounting
N	Basic integrated clevis
E**	Double end
F**	Front nose
Y**	Front nose in line port

* Double acting, Double rod:
Only double end style (E).
** Except air cushion type.

Bore size

Bore size (mm)	Standard stroke (mm)**	Max. stroke (mm)		
		Standard	Non-rotating	Double rod
8*	10, 25, 40, 50, 80, 100	400	100	100
10				
12				
16	10, 25, 40, 50, 80, 100, 125, 160, 200	1000	1000	500
20				
25				

* Not available with air cushion.
** Other strokes available on request.

Stroke

Cushion

Nil	Rubber cushion (Standard)
C	Air cushion (Only "N" execution, bores 10 to 25 mm)

Auto switch mounting type

A	Rail mounting
B	Band mounting

Applicable auto switches and bands are shown on page 6-11-44. Please order auto switches and bands separately.

Option

R	Stainless steel piston rod, rod end nut and mounting nut
R2	Stainless steel piston rod and rod end nut

Note) Please refer to page 6-11-47 for additional options. Only one option can be selected.

Rod boot (Only ø20, ø25)

Nil	Without rod boot
J	Nylon tarpaulin one side
K	Heat resistant tarpaulin one side
JJ*	Nylon tarpaulin both sides
KK*	Heat resistant tarpaulin both sides

* In the case of double acting/double rod.

Mounting Bracket Part No.

Bore size (mm)		8	10	12	16	20	25
Mounting bracket	Foot (1 pc.)	C85L10A	C85L16A	C85L25A			
	Foot (2 pcs. with mounting nut 1 pc.)	C85L10B	C85L16B	C85L25B			
	Flange	C85F10	C85F16	C85F25			
	Trunnion	C85T10	C85T16	C85T25			
	Clevis	C85C10	C85C16	C85C25			
Accessory	Single knuckle joint	KJ4D	KJ6D	KJ8D	KJ10D		
	Double knuckle joint	GKM4-8	GKM6-10	GKM8-16	GKM10-20		
	Floating joint	JA10-4-070	JA15-6-100	JA20-8-125	JA30-10-125		


Replacement Parts For Standard Cylinders

Bore size (mm)	Part no.	Note
20	C85-20PS	Every set includes: n°1 rod seal n°1 seal retaining washer n°1 retaining ring
25	C85-25PS	

For Non-rotating Cylinders ("K")

Bore size (mm)	Part no.	Note
20	C85K-20PS	Every set includes: n°1 rod seal n°1 seal retaining washer n°1 retaining ring
25	C85K-25PS	

ISO Cylinder: Standard/Non-rotating Type Double Acting, Single/Double Rod **Series C85**

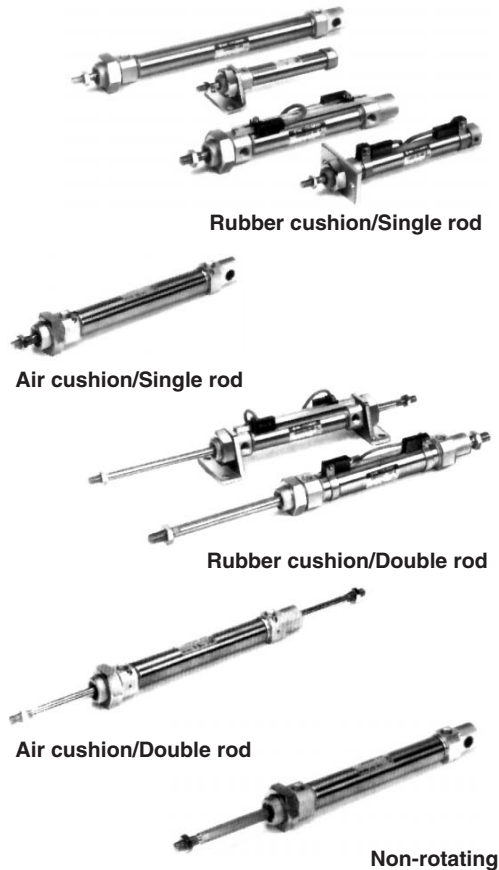

Specifications

Bore size (mm)		8	10	12	16	20	25
Piston rod dia. (mm)		4	4	6	6	8	10
Piston rod thread		M4 x 0.7	M4 x 0.7	M6 x 1	M6 x 1	M8 x 1.25	M10 x 1.25
Port size		M5 x 0.8	M5 x 0.8	M5 x 0.8	M5 x 0.8	G 1/8	G 1/8
Action		Double acting, Single/Double rod					
Fluid		Air					
Proof pressure		1.5 MPa					
Max. operating pressure		1.0 MPa					
Min. operating pressure	Spring return	0.1 MPa	0.08 MPa	0.05 MPa	0.05 MPa		
	Spring extended				0.08 MPa		
Ambient and fluid temperature		-20 to 80°C (Built-in magnet: -10 to 60°C)					
Cushion		Rubber cushion, Air cushion (Except ø8) (Non-rotating: Rubber bumper only)					
Lubrication		Not required. Use turbine oil Class 1 ISO VG32, if lubricated.					
Rod boot	Nylon tarpaulin	—				Max. ambient temperature 60°C	
	Heat resistant tarpaulin	—				Max. ambient temperature 110°C*	
Piston speed		50 to 1500 mm/s					
Allowable kinetic energy	Rubber cushion	0.02 J	0.03 J	0.04 J	0.09 J	0.27J	0.4 J
	Air cushion	—	0.17 J	0.19 J	0.4 J	0.66 J	0.97 J
Non-rotating accuracy		±1° 30'	±1° 30'	± 1°	±1°	±0° 42'	±0° 42'
Stroke tolerance (mm)		0/+1				0/+1.4	

* Maximum ambient temperature of rod boots only.

JIS Symbol


Double acting, Single rod



Rubber cushion

Air cushion


Double acting, Double rod



Rubber cushion

Air cushion

Non-rotating rod: Double acting, Single rod



Weight (Standard, Non-rotating rod)

(g)

Bore size (mm)		8	10	12	16	20	25
Double action	Basic weight	45	49	96	109	183(203)	258(286)
	Add'l weight for each 10 mm of stroke	3	3.2	6.2	7.2	11.8	18.4
Mounting bracket		C85L□A	20	40	95		
		C85L□B	55	105	210		
		C85F□	12	25	90		
		C85T□	20	50	75		
		C85C□	20	40	85		
Accessory	Single knuckle joint	KJID	17	25	45	70	
	Double knuckle joint	GKM□-□	10	20	50	100	
	Floating joint	JA□-□-□	10	20	50	70	

Calculation: (Example) C85N10-50, C85F10

Basic weight ——— 49 (ø10)g

Additional weight ——— 3.2/10 mm of stroke

Cylinder stroke ——— 50 mm

Mounting bracket ——— 12g

49 + 3.2 x 50/10 = 65g 65 + 12 = 77g

() : In the case of air cushion


Series C85

Construction

[First angle projection]

Double acting, Single rod

C□85□10 to 16 Air cushion (Disassembly is not possible.)

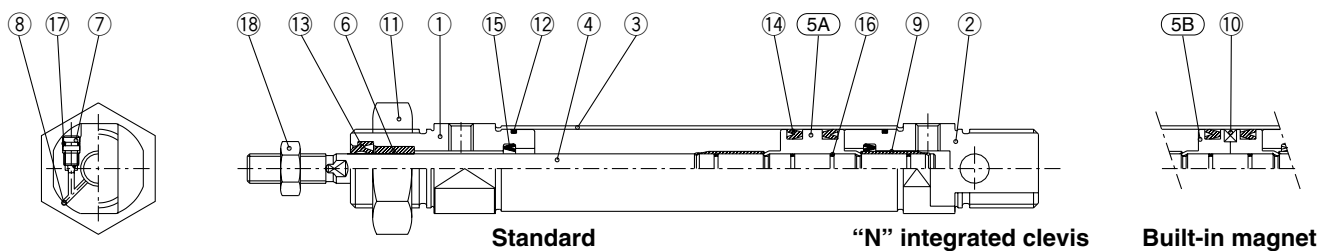


Component Parts

No.	Description	Material	Qty.	Note
①	Rod cover	Aluminum alloy	1	White anodized
②	Head cover N	Aluminum alloy	1	White anodized
③	Cylinder tube	Stainless steel	1	
④	Piston rod	Stainless steel	1	
⑤A	Piston A	Brass	1	
⑤B	Piston B	Brass	2	(Switch type piston)
⑥	Bush	Sintered bronze	1	
⑦	Cushion needle	Stainless steel	2	
⑧	Steel ball	Bearing steel	2	

No.	Description	Material	Qty.	Note
⑨	Cushion ring	Brass	2	
⑩	Magnet	Magnet	1	(Switch type only)
⑪	Mounting nut	Carbon steel	1	Nickel plating
⑫	Tube gasket	NBR	2	
⑬	Rod seal	NBR	1	
⑭	Piston seal	NBR	2	
⑮	Check seal	NBR	2	
⑯	Piston gasket and cushion ring gasket	NBR	3	(4 for switch type)
⑰	Needle seal	NBR	2	
⑱	Rod end nut	Carbon steel	1	Nickel plating

C□85□20/25 Air cushion

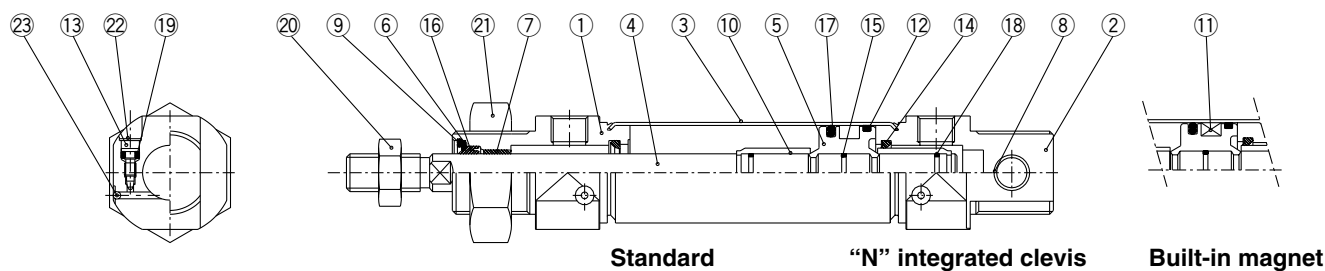

Component Parts

No.	Description	Material	Qty.	Note
①	Rod cover	Aluminum alloy	1	White anodized
②	Head cover N	Aluminum alloy	1	White anodized
③	Cylinder tube	Stainless steel	1	
④	Piston rod	Carbon steel	1	Hard chrome plated
⑤	Piston	Aluminum alloy	1	Chromate
⑥	Plain washer	Stainless steel	1	
⑦	Bush	Sintered bronze	1	
⑧	Bush	Sintered bronze	1	
⑨	Retaining ring	Carbon steel	1	Nickel plating
⑩	Cushion ring	Brass	2	
⑪	Magnet	Magnet	1	(Switch type only)
⑫	Wear ring	Resin	1	

No.	Description	Material	Qty.	Note
⑬	Cushion needle	Alloy steel	2	Electroless nickel plating
⑭	Cushion seal	Urethane	2	
⑮	Piston gasket	NBR	1	
⑯	Rod seal	NBR	1	
⑰	Piston seal	NBR	1	
⑱	Cushion ring gasket	NBR	2	
⑲	Cushion needle seal	NBR	2	
⑳	Rod end nut	Carbon steel	1	Nickel plating
㉑	Mounting nut	Carbon steel	1	Nickel plating
㉒	Self locking ring	Stainless steel	2	
㉓	Steel ball	Stainless steel	2	

Series C85



Spring return



Spring extended

Rubber cushion




Non-rotating


Specifications

Bore size (mm)		8	10	12	16	20	25
Piston rod dia. (mm)		4	4	6	6	8	10
Piston rod thread		M4 x 0.7	M4 x 0.7	M6 x 1	M6 x 1	M8 x 1.25	M10 x 1.25
Port size		M5 x 0.8	M5 x 0.8	M5 x 0.8	M5 x 0.8	G 1/8	G 1/8
Action		Single acting, Single rod, Spring return/extend					
Fluid		Air					
Proof pressure		1.5 MPa					
Max. operating pressure		1.0 MPa					
Min. operating pressure	Spring return	0.22 MPa	0.18 MPa	0.13 MPa	0.18 MPa		
	Spring extended				0.23 MPa		
Ambient and fluid temperature		−20 to 80°C (Built-in magnet type: −10 to 60°C)					
Cushion		Rubber cushion (Standard)					
Lubrication		Not required. Use turbine oil Class 1 ISO VG32, if lubricated.					
Piston speed		50 to 1500 mm/s					
Allowable kinetic energy		0.02 J	0.03 J	0.04 J	0.09 J	0.27 J	0.4 J
Non-rotating accuracy*		±1° 30'	±1° 30'	± 1°	±1°	±0° 42'	±0° 42'
Stroke tolerance (mm)		0/+1				0/+1.4	

JIS Symbol
Standard




Spring return




Spring extended

Non-rotating



Spring return



Spring extended

Spring Retracting Force (Standard, Non-rotating)

Spring Return

(N)

Bore size (mm)	Standard stroke (mm)	Spring force									
		10		25		50		100		150	
		Retract	Extended	Retract	Extended	Retract	Extended	Retract	Extended	Retract	Extended
8	10, 25, 50	4.41	4.02	4.41	3.43	4.41	2.45	—	—	—	—
10		6.28	5.69	6.28	4.90	6.28	3.53	—	—	—	—
12		7.16	6.57	7.16	5.79	7.16	4.41	—	—	—	—
16	10, 25, 50, 100, 150	13.2	12.1	13.2	10.3	13.2	7.45	13.2	7.45	13.2	7.45
20		21.6	18.6	21.6	16.7	21.6	11.8	39.2	9.81	39.2	9.81
25		27.5	25.3	27.5	22.1	27.5	16.7	47.1	13.7	47.1	15.7

Spring Extended

(N)

Bore size (mm)	Standard stroke (mm)	Spring force									
		10		25		50		100		150	
		Retract	Extend	Retract	Extend	Retract	Extend	Retract	Extend	Retract	Extend
8	10, 25, 50	5.30	3.92	5.30	3.14	5.30	2.65	—	—	—	—
10		5.98	4.81	5.98	4.02	5.98	3.53	—	—	—	—
12		6.57	5.59	6.57	4.90	6.57	4.51	—	—	—	—
16	10, 25, 50, 100, 150	14.7	11.3	14.7	9.22	14.7	7.85	14.7	7.85	14.7	7.85
20		39.2	33.0	39.2	23.5	39.2	9.81	39.2	9.81	39.2	9.81
25		47.1	40.4	47.1	30.4	47.1	13.7	47.1	13.7	47.1	15.7