




## Technical data

### NU216C3

Single row cylindrical roller bearings

Single row cylindrical roller bearing, floating, separable, pressed steel cage

## Visual(s)

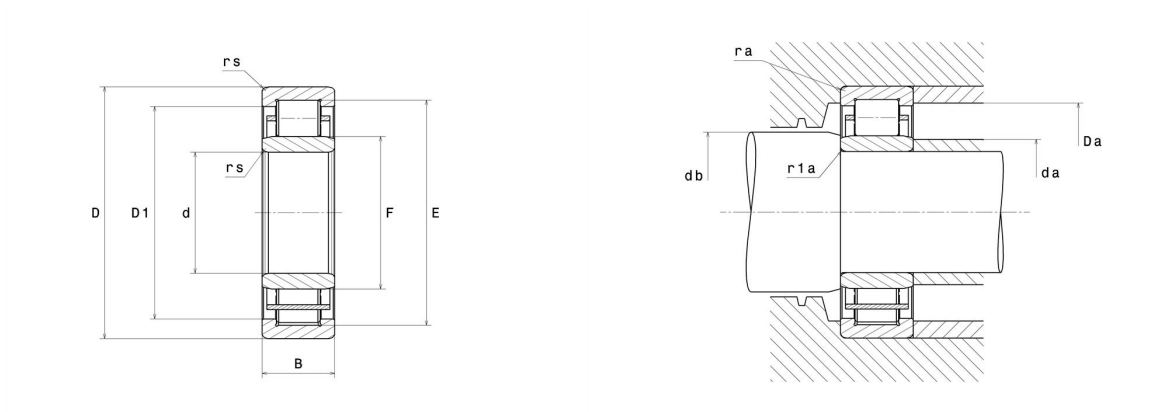

## Product definition

|                               |          |
|-------------------------------|----------|
| <b>d</b>                      | 80 mm    |
| <b>D</b>                      | 140 mm   |
| <b>B</b>                      | 26 mm    |
| <b>E</b>                      | 125.3 mm |
| <b>F</b>                      | 95.3 mm  |
| <b>rs min</b>                 | 2 mm     |
| <b>r1s min</b>                | 2 mm     |
| <b>Radial clearance class</b> | C3       |
| <b>Mass (without HJ ring)</b> | 1.55 kg  |
| <b>Brand</b>                  | NTN      |

## Product performance

|                                        |              |
|----------------------------------------|--------------|
| <b>Dynamic load, C</b>                 | 106 kN       |
| <b>Static load, C0</b>                 | 122 kN       |
| <b>Fatigue limit load, Cu</b>          | 14.5 kN      |
| <b>Nlim (oil)</b>                      | 5,700 Tr/min |
| <b>Nlim (grease)</b>                   | 4,800 Tr/min |
| <b>Min operating temperature, Tmin</b> | -40 °C       |
| <b>Max operating temperature, Tmax</b> | 120 °C       |

## Abutment dimensions

|                |        |
|----------------|--------|
| <b>da min</b>  | 89 mm  |
| <b>da max</b>  | 94 mm  |
| <b>db min</b>  | 97 mm  |
| <b>Da max</b>  | 131 mm |
| <b>ra max</b>  | 2 mm   |
| <b>r1a max</b> | 2 mm   |

## Calculation factors

Equivalent dynamic radial load

$$P = F_r$$

Equivalent static radial load

$$P_0 = F_r$$