


Dimensions

Power supply cable

IZF10-CP□

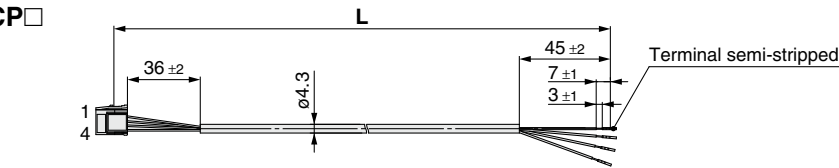


Part no.	L
IZF10-CP	3000 ⁺⁶⁰ ₀
IZF10-CPZ	9850 ⁺¹⁰⁰ ₀

Wiring/IZF10

Pin no.	Cable color	Signal name	Conductor size (AWG)
1	Brown	+ 24 VDC	24
2	Blue	0 V	24
3	Green	F. G.	24
4	Purple	Error signal	24

IZF10R-CP□

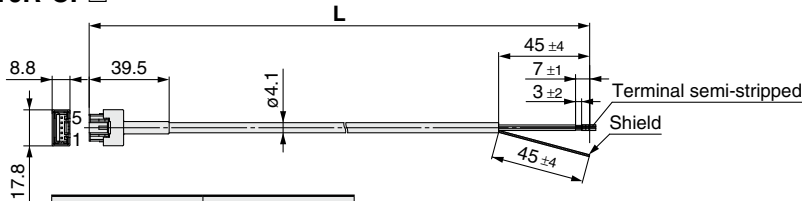

Part no.	L
IZF10R-CP	3000 ⁺⁶⁰ ₀
IZF10R-CPZ	9850 ⁺¹⁰⁰ ₀


Wiring/IZF10R

Pin no.	Cable color	Signal name	Conductor size (AWG)
1	Brown	+ 24 VDC	26
2	Blue	0 V	26
3	Green	F. G.	26
4	Yellow	Maintenance	26
5	Purple	Error signal	26

AC adapter


IZF10-CG1

With AC cord

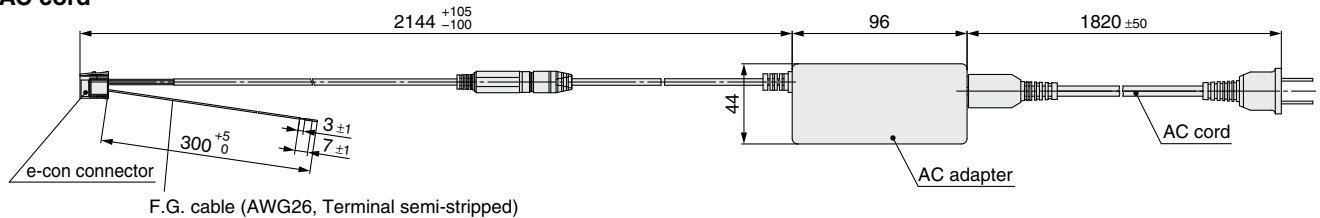


IZF10-CG2

Without AC cord

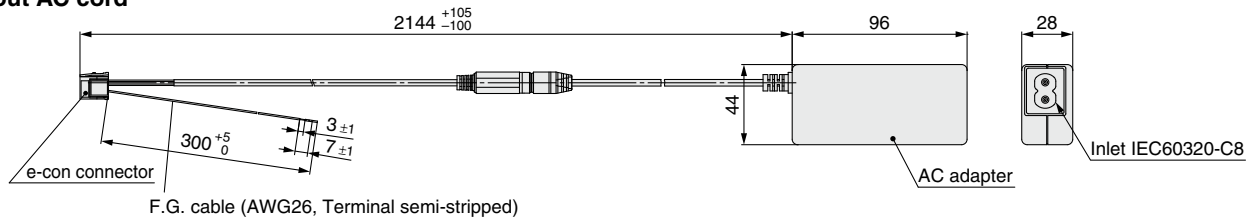

IZF10R-CG1

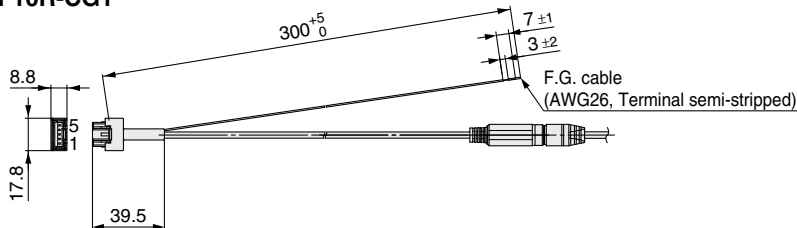

※: AC cord is only for use in Japan. (Rated voltage 125 V, Plug JIS C8303, Inlet IEC60320-C8)
External output cannot be used when the AC adapter is being used.