


Male Connector: KJH


<10-32 UNF>	Applicable tubing O.D. (inch)	Connection thread (T) UNF NPT	Model	H (Width across flats)	L	A	M	Max. port size	Weight (g)
	1/8	10-32 UNF	KJH01-32	7	16.7	13.6	12.7	2.3	2
		1/16	KJH01-33S	9.5	18.8	14.8 *		2.5	5
		1/8	KJH01-34S	11.11	13.8	9.8 *		2.5	4.7
	5/32	10-32 UNF	KJH03-32	8	17	13.9	12.7	2.3	2.4
		1/16	KJH03-33S	9.5	19.5	15.5 *		3	4.7
		1/8	KJH03-34S	11.11	14.8	10.8 *		3	4.6
<NPT>	1/4	10-32 UNF	KJH07-32		18.4	15.3	13.6	2.3	3.3
		1/16	KJH07-33S	11.11	22	18 *		3.5	6.2
		1/8	KJH07-34S		18.4	14.4 *		4.6	5.2

* Reference dimensions after NPT thread installation.

<10-32 UNF>



<NPT>




Hexagon Socket Head Male Connector: KJS


<10-32 UNF>	Applicable tubing O.D. (inch)	Connection thread (T) UNF NPT	Model	H (Width across flats)	Note) øD	L	A	M	Min. port size	Weight (g)
	1/8	10-32 UNF	KJS01-32	2	7	19.7	16.6	12.7	2	2.8
		10-32 UNF	KJS03-32	2.5	8	18.7	15.6	12.7	2.5	2.7
	5/32	1/16	KJS03-33S		10.3	19.6	15.6 *	12.7	2.8	4
		1/8	KJS03-34S	2.78						5.4
<NPT>	1/4	10-32 UNF	KJS07-32	2.5	10.3	19.6	16.5	13.6	2.5	3.3
		1/16	KJS07-33S	3.57					3.6	5.8
		1/8	KJS07-34S	4.76					4.8	5.2

* Reference dimensions after NPT thread installation.
Note) øD: Max. diameter

<10-32 UNF>

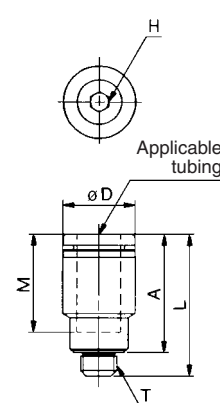


<NPT>

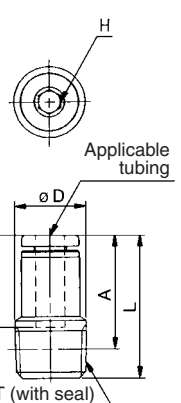

Female Connector: KJF

Applicable tubing O.D. (inch)	Connection thread (T) UNF	Model	H (Width across flats)	Note) øD	L1	L2	M	Min. port size	Weight (g)
1/8	10-32 UNF	KJF01-32	7	6.9	18.8	7.9	12.7	2.5	2.8
5/32	10-32 UNF	KJF03-32	8	7.9	18.7	7.8	12.7	3	3.8
1/4	10-32 UNF	KJF07-32	11.11	10.3	18	7.5	13.6	4	5.3

Note) øD: Max. diameter



Straight Union: KJH

Applicable tubing O.D. (inch)	Model	Note) øD	L	M	Min. port size	Weight (g)
1/8	KJH01-00	8.4	26.3	12.7	2.5	1.4
5/32	KJH03-00	9.3	26.3	12.7	3	1.7
1/4	KJH07-00	12	28.1	13.6	4.6	2.6

Note) øD: Max. diameter

