




Technical datasheet

4T-98350/98788

Single row tapered roller bearings

Tapered roller bearing, pressed steel cage

Visual(s)

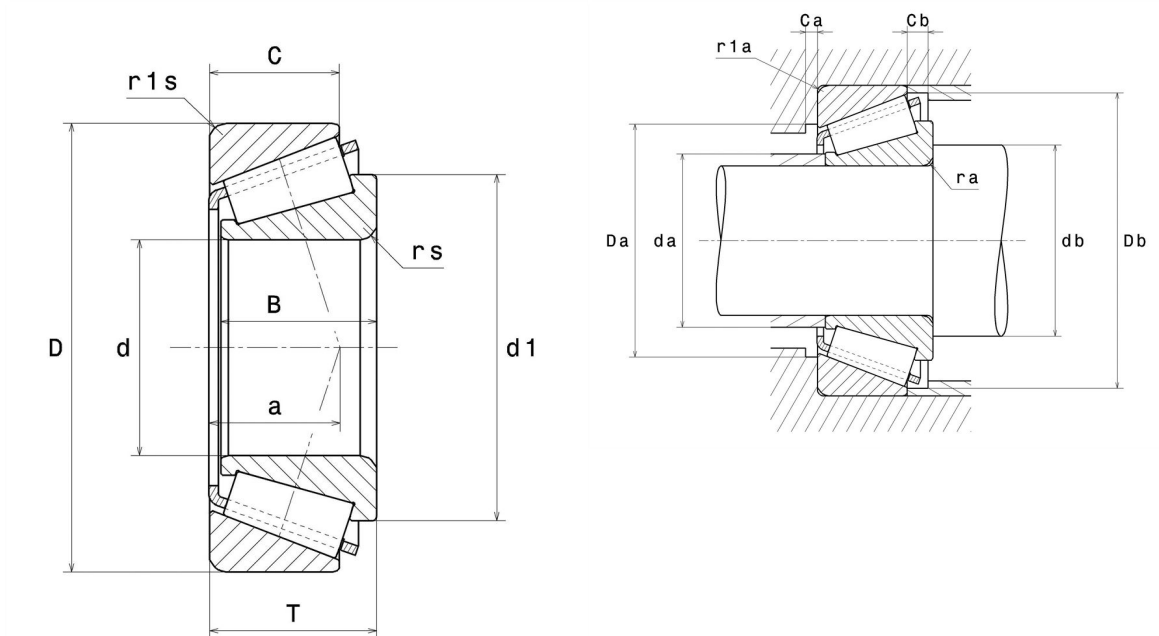

Product definition

d	88.9 mm
D	200 mm
B	49.21 mm
C	34.92 mm
T	52.76 mm
a	54.3 mm
rs min	3.56 mm
r1s min	3.3 mm
e	0.63
Y2	0.95
Y0	0.52
Mass	7.55 kg
Brand	NTN

Product performance

Dynamic load, C	345 kN
Rating life coefficient, A2	1.4
Static load, C0	470 kN
Nlim (oil)	2,500 rpm
Nlim (grease)	1,900 rpm
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.43 Hz
Characteristic rolling element frequency, BSF	6.42 Hz
Characteristic outer ring frequency, BPF0	7.73 Hz
Characteristic inner ring frequency, BPFI	10.27 Hz

Abutment dimensions

ra max	3.5 mm
r1a max	3.3 mm

Calculation factors

Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

$F_a / F_r \leq e$		$F_a / F_r > e$	
X	Y	X	Y
1	0	0.4	Y2

Equivalent static radial load

$$P_0 = X_0.F_r + Y_0.F_a$$

X_0	Y_0
0.5	Y0

If $P_0 \leq F_r$, then use $P_0 = F_r$

The values for e, Y2 and Y0 are shown in the above table