


Self-Lube® triple seal bearing inserts

T1000G Series

T1000G

With spherical outside diameter and integral set screw lock

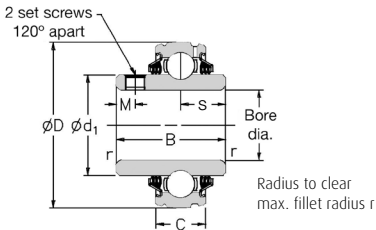

Shaft diameter mm inches	RHP designation	Dimensions (mm)							ISO Load ratings		Rec. max. speed rev/min	Mass (approx.) kg
		D	C	B	s	d ₁	M	r	dynamic C _r newtons	static C _{0r} newtons		
25	T1025-25G	52.000	15.00	34.10	14.33	34.00	5.00	1.00	14000	7880	1000	0.17
	7/8 T1025-7/8G											
	1 1/16 T1025-1 1/16G											
	1 T1025-1G											
25	T1030-25G	62.000	18.00	38.10	15.93	40.30	5.00	1.00	19500	11300	850	0.37
30	T1030-30G											
	7/8 T1030-7/8G											
	1 T1030-1G											
	1 1/8 T1030-1 1/8G											
	1 3/16 T1030-1 3/16G											
	1 1/4 T1030-1 1/4G											
30	T1035-30G	72.000	19.00	42.90	17.53	46.90	6.50	1.00	25700	15300	750	0.51
35	T1035-35G											
	1 3/16 T1035-1 3/16G											
	1 1/4 T1035-1 1/4G											
	1 3/8 T1035-1 3/8G											
	1 7/16 T1035-1 7/16G											
35	T1040-35G	80.000	21.00	49.20	19.03	52.40	8.00	1.00	32500	19900	650	0.64
40	T1040-40G											
	1 3/8 T1040-1 3/8G											
	1 7/16 T1040-1 7/16G											
	1 1/2 T1040-1 1/2G											
40	T1045-40G	85.000	22.00	49.20	19.04	57.40	8.00	1.00	32500	20500	600	0.73
45	T1045-45G											
	1 1/2 T1045-1 1/2G											
	1 5/8 T1045-1 5/8G											
	1 11/16 T1045-1 11/16G											
	1 3/4 T1045-1 3/4G											
45	T1050-45G	90.000	23.00	51.60	19.04	62.40	10.00	1.00	35000	23200	550	0.91
50	T1050-50G											
	1 11/16 T1050-1 11/16G											
	1 3/4 T1050-1 3/4G											
	1 7/8 T1050-1 7/8G											
	1 15/16 T1050-1 15/16G											
	2 T1050-2G											
50	T1055-50G	100.000	25.00	55.60	22.24	68.90	10.00	1.50	43500	29200	500	1.12
55	T1055-55G											
	1 7/8 T1055-1 7/8G											
	1 15/16 T1055-1 15/16G											
	2 T1055-2G											
	2 1/8 T1055-2 1/8G											
	2 3/16 T1055-2 3/16G											

Please check availability