


## BSP FBSPORX90

Female BSP 'O' ring swivel. 60° cone.  
90° swept elbow.

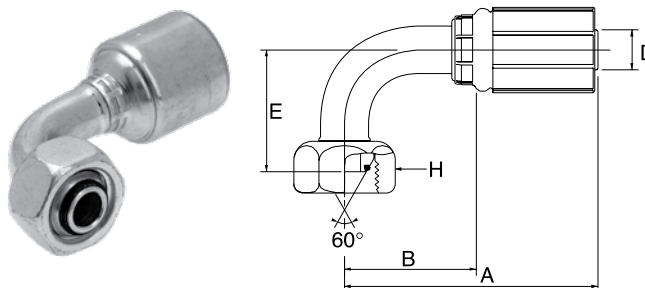

| D     |    |       |                   | A     | B    | E    | H    | REF.           |
|-------|----|-------|-------------------|-------|------|------|------|----------------|
| -size | DN | "     |                   | mm    | mm   | mm   | mm   | G              |
| -4    | 6  | 1/4   | G 1/4" - 19 BSP   | 53.0  | 27.0 | 23.5 | 19.0 | 4G4FBSPORX90   |
| -4    | 6  | 1/4   | G 3/8" - 19 BSP   | 53.0  | 27.0 | 32.0 | 22.0 | 4G6FBSPORX90   |
| -5    | 8  | 5/16  | G 3/8" - 19 BSP   | 58.0  | 30.0 | 32.0 | 22.0 | 5G6FBSPORX90   |
| -6    | 10 | 3/8   | G 1/4" - 19 BSP   | 59.9  | 31.9 | 36.0 | 19.0 | 6G4FBSPORX90   |
| -6    | 10 | 3/8   | G 3/8" - 19 BSP   | 61.9  | 34.0 | 32.0 | 22.0 | 6G6FBSPORX90   |
| -6    | 10 | 3/8   | G 1/2" - 14 BSP   | 60.1  | 32.2 | 37.5 | 22.0 | 6G8FBSPORX90   |
| -8    | 12 | 1/2   | G 3/8" - 19 BSP   | 69.9  | 32.4 | 36.1 | 22.0 | 8G6FBSPORX90   |
| -8    | 12 | 1/2   | G 1/2" - 14 BSP   | 78.0  | 40.5 | 37.5 | 27.0 | 8G8FBSPORX90   |
| -8    | 12 | 1/2   | G 5/8" - 14 BSP   | 80.2  | 42.8 | 46.0 | 30.0 | 8G10FBSPORX90  |
| -10   | 16 | 5/8   | G 5/8" - 14 BSP   | 84.1  | 46.6 | 46.0 | 30.0 | 10G10FBSPORX90 |
| -10   | 16 | 5/8   | G 3/4" - 14 BSP   | 84.1  | 46.6 | 60.0 | 32.0 | 10G12FBSPORX90 |
| -12   | 20 | 3/4   | G 3/4" - 14 BSP   | 107.0 | 56.0 | 60.0 | 32.0 | 12G12FBSPORX90 |
| -12   | 20 | 3/4   | G 1" - 11 BSP     | 112.2 | 61.2 | 70.0 | 41.0 | 12G16FBSPORX90 |
| -16   | 25 | 1     | G 3/4" - 14 BSP   | 108.8 | 52.0 | 54.1 | 32.0 | 16G12FBSPORX90 |
| -16   | 25 | 1     | G 1" - 11 BSP     | 131.1 | 74.3 | 70.0 | 41.0 | 16G16FBSPORX90 |
| -20   | 32 | 1.1/4 | G 1.1/4" - 11 BSP | 151.4 | 92.4 | 80.0 | 50.0 | 20G20FBSPORX90 |

Unless otherwise stated the coupling meets the pressure rating requirements of the respective international standard.