


Mechanically Jointed Rodless Cylinder

Series MY1

High
Accuracy

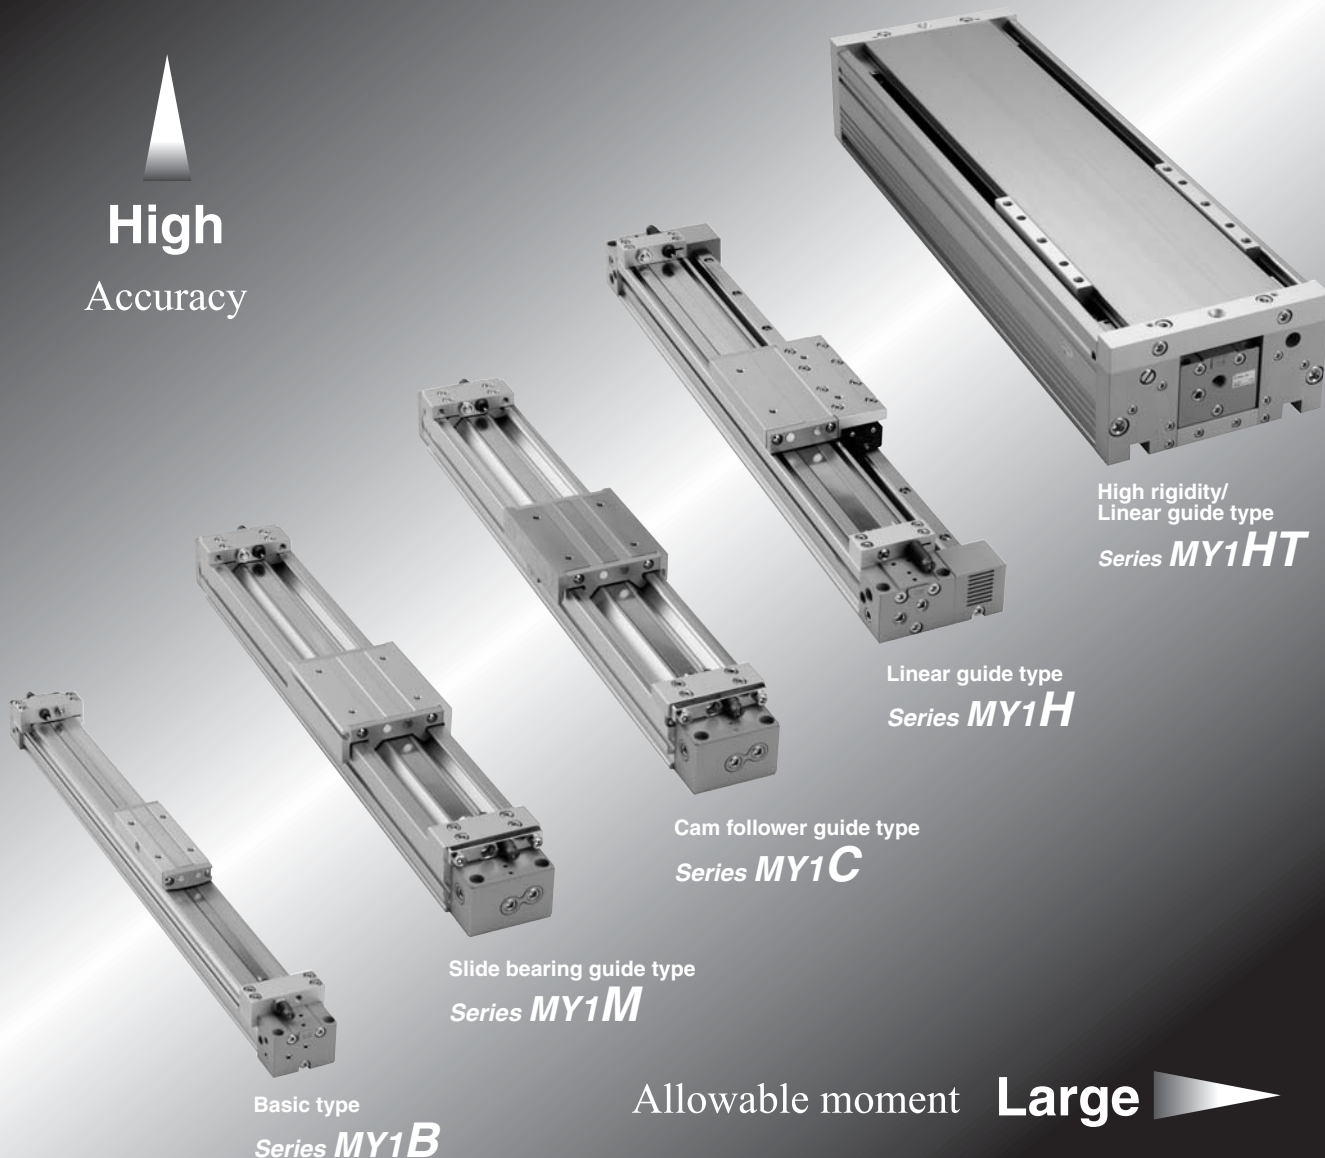

MY1B

MY1M

MY1C

MY1H

MY1HT

MY1□W

MY2C

MY2H□

MY3A
MY3B

MY3M

High rigidity/
Linear guide type

Series **MY1HT**

Linear guide type
Series **MY1H**

Cam follower guide type
Series **MY1C**

Slide bearing guide type
Series **MY1M**

Basic type
Series **MY1B**

Allowable moment **Large**

Five types of guide allow a wide range of selections.

Series Variations			Bore size (mm)										Air cushion	Stroke adjusting Unit	Side support	Floating bracket	End lock	Made to Order ⁽³⁾	
Series	Guide type	Piping type ⁽¹⁾	10	16	20	25	32	40	50	63	80	100							
MY1B	Basic type	Centralized piping Standard piping	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	P. 951
MY1M	Slide bearing guide type		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	P. 975
MY1C	Cam follower guide type		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	P. 995
MY1H	Linear guide type		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	P. 1015
MY1HT	High rigidity/Linear guide type		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	P. 1039

Note 1) $\phi 10$ is available with central piping only. Note 2) $\phi 10$ is available with rubber bumper only.
Note 3) Availability for made-to-order differs, depending on the size and the model.

D-□

-X□

Individual

-X□

Technical data

Mechanically Jointed Rodless Cylinder Basic Type

Series MY1B

ø10, ø16, ø20, ø25, ø32, ø40, ø50, ø63, ø80, ø100

How to Order

Basic type MY1B 20 - 300 - M9BW

Bore size (mm)

10	10 mm
16	16 mm
20	20 mm
25	25 mm
32	32 mm
40	40 mm
50	50 mm
63	63 mm
80	80 mm
100	100 mm

Port thread type

Symbol	Type	Bore size
Nil	M thread	ø10, ø16, ø20
	Rc	ø25, ø32, ø40, ø50, ø63, ø80, ø100
TN	NPT	
TF	G	

Piping

Nil	Standard type
G	Centralized piping type

Note) For ø10, only G is available.

Cylinder stroke (mm)

Refer to "Standard Stroke" on page 957.

Stroke adjusting unit

Nil	Without adjusting unit
A	With adjusting bolt
L	With low load shock absorber + Adjusting bolt
H	With high load shock absorber + Adjusting bolt
AL	With one A unit and one L unit
AH	With one A unit and one H unit each
LH	With one L unit and one H unit each

Only the A unit is available for ø16. Stroke adjusting unit is not available for ø50, ø63, ø80 and ø100. For detailed information on stroke adjusting unit specifications, refer to page 957.

Auto switch

Nil	Without auto switch (Built-in magnet)
-----	---------------------------------------

For ø10 cylinders without an auto switch, the cylinder configuration is for the reed auto switch. Contact SMC when the solid state auto switch is retrofitted.

Applicable auto switches vary depending on the bore size. Select an applicable one referring to the table below.

Made to Order
Refer to page 957 for details.

Number of auto switches

Nil	2 pcs.
S	1 pc.
n	"n" pcs.

Suffix for stroke adjusting unit

Nil	Both sides
S	One side

Note) "S" is applicable for stroke adjusting units A, L and H.

Shock Absorbers for L and H Units

Bore size (mm)	10	20	25	32	40
L unit	—	RB0806	RB1007	RB1412	
H unit	RB0805	RB1007	RB1412	RB2015	

The shock absorber service life is different from that of the MY1B cylinder depending on operating conditions. Refer to the RB Series Specific Product Precautions for the replacement period.

Applicable Auto Switch/Refer to pages 1263 to 1371 for further information on auto switches.

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage			Auto switch model				Lead wire length (m)				Pre-wired connector	Applicable load	
					DC	AC	Perpendicular		In-line		0.5 (Nil)	1 (M)	3 (L)	5 (Z)				
							ø10 to ø20	ø25 to ø100	ø10 to ø20	ø25 to ø100								
Solid state switch	—	Grommet	Yes	3-wire (NPN)	24V	5V, 12V	—	M9NV ** [Y69A]	M9N ** [Y59A]	●	● [—]	●	○	○	IC circuit	Relay, PLC		
				3-wire (PNP)				M9PV ** [Y7PV]	M9P ** [Y7P]	●	● [—]	●	○	○				
				2-wire				M9BV ** [Y69B]	M9B ** [Y59B]	●	● [—]	●	○	○			—	
	Diagnostic indication (2-color indication)			3-wire (NPN)		5V, 12V		M9NWV ** [Y7NWV]	M9NW ** [Y7NW]	●	● [—]	●	○	○	IC circuit			
				3-wire (PNP)				M9PWV ** [Y7PWV]	M9PW ** [Y7PW]	●	● [—]	●	○	○				
				2-wire				M9BWV ** [Y7BWV]	M9BW ** [Y7BW]	●	● [—]	●	○	○			—	
Reed switch	—	Grommet	Yes	3-wire (NPN equivalent)	—	5V	—	A96V	—	A96	Z76	●	—	●	—	—	IC circuit	—
				2-wire	24V	12V	100V	A93V	—	A93	—	●	—	●	—	—	—	Relay, PLC
								—	—	—	Z73	●	—	●	●	—		
			No			100V or less		A90V	—	A90	Z80	●	—	●	—	—	IC circuit	

* Lead wire length symbols: 0.5 m Nil (Example) M9NW
1 m M (Example) M9NWM
3 m L (Example) M9NWL
5 m Z (Example) M9NWLZ

* Solid state auto switches marked with "○" are produced upon receipt of order.
** D-M9□□□ type cannot be mounted on ø50.
Select auto switches in brackets.

* There are other applicable auto switches than listed above. For details, refer to page 1053.
* For details about auto switches with pre-wired connector, refer to pages 1328 and 1329.
* Auto switches are shipped together (not assembled).

Series MY1B

Centralized Piping Type ø10

Refer to page 1056 regarding centralized piping port variations.

MY1B10G — **Stroke**