


Shank mounted wheel brushes

crimped

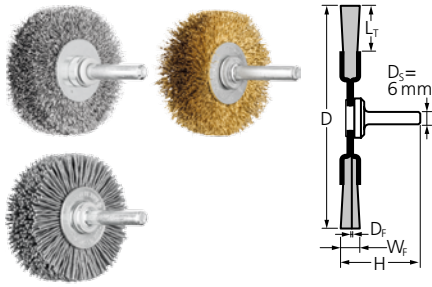

RBUS

Universally suitable for cleaning, derusting, smoothing, cleaning of weld seams, light deburring, and removal of corrosion and paint.

Advantages:

- Highly flexible, enabling optimal adjustment to the workpiece contour.

Recommendations for use:

- For the best results, use a tool drive with a minimum output of 300 watts.

Ordering notes:

- For POS type, please add "POS" to the description.

D [mm]	W _F [mm]	L _T [mm]	D _F [mm]	H [mm]	Packaging		Opt. RPM	Max. RPM	Description
					10x	1			
						10			
					EAN 4007220				

Steel wire (ST)

20	4	3	0.20	37	-	152980	10,000–15,000	20,000	RBUS 2004/6 ST 0,20
30	6	7	0.20	40	531808	153017	10,000–15,000	20,000	RBUS 3006/6 ST 0,20
	9	7	0.20	42	-	899250	10,000–15,000	20,000	RBUS 3009/6 ST 0,20
40	9	9	0.20	46	-	153048	9,000–13,500	18,000	RBUS 4009/6 ST 0,20
50	4	9	0.20	41	-	806593	7,500–11,300	15,000	RBUS 5004/6 ST 0,20
	10	13	0.20	50	-	104767	7,500–11,300	15,000	RBUS 5010/6 ST 0,20
	15	13	0.20	50	531822	153079	7,500–11,300	15,000	RBUS 5015/6 ST 0,20
60	10	15	0.20	50	-	104781	7,500–11,300	15,000	RBUS 6010/6 ST 0,20
	15	15	0.20	50	-	658437	7,500–11,300	15,000	RBUS 6015/6 ST 0,20
70	4	9	0.20	41	-	806609	7,500–11,300	15,000	RBUS 7004/6 ST 0,20
	10	19	0.30	50	-	658444	7,500–11,300	15,000	RBUS 7010/6 ST 0,30
	15	19	0.30	50	894606	153109	7,500–11,300	15,000	RBUS 7015/6 ST 0,30
80	4	10	0.20	41	-	806616	6,000–9,000	12,000	RBUS 8004/6 ST 0,20
	15	19	0.30	50	-	153130	6,000–9,000	12,000	RBUS 8015/6 ST 0,30
100	10	25	0.30	50	894613	658451	6,000–9,000	12,000	RBUS 10010/6 ST 0,30

Stainless steel wire (INOX)

20	4	3	0.20	37	-	153000	8,000–13,000	20,000	RBUS 2004/6 INOX 0,20
30	6	7	0.20	40	531884	153031	8,000–13,000	20,000	RBUS 3006/6 INOX 0,20
	9	7	0.20	42	-	899267	8,000–13,000	20,000	RBUS 3009/6 INOX 0,20
40	9	9	0.20	46	-	153062	7,200–11,700	18,000	RBUS 4009/6 INOX 0,20
50	4	9	0.20	41	-	806623	6,000–9,800	15,000	RBUS 5004/6 INOX 0,20
	10	13	0.20	50	-	104774	6,000–9,800	15,000	RBUS 5010/6 INOX 0,20
	15	13	0.20	50	531891	153093	6,000–9,800	15,000	RBUS 5015/6 INOX 0,20
60	10	15	0.20	50	-	104798	6,000–9,800	15,000	RBUS 6010/6 INOX 0,20
	15	15	0.20	50	-	658468	6,000–9,800	15,000	RBUS 6015/6 INOX 0,20
70	4	9	0.20	41	-	806630	6,000–9,800	15,000	RBUS 7004/6 INOX 0,20
	10	19	0.20	50	-	597835	6,000–9,800	15,000	RBUS 7010/6 INOX 0,20
	15	19	0.15	50	-	597842	6,000–9,800	15,000	RBUS 7015/6 INOX 0,15
	15	19	0.30	50	894620	153123	6,000–9,800	15,000	RBUS 7015/6 INOX 0,30
80	4	10	0.20	41	-	806647	4,800–7,800	12,000	RBUS 8004/6 INOX 0,20
	10	19	0.20	50	-	578919	4,800–7,800	12,000	RBUS 8010/6 INOX 0,20
	15	19	0.15	50	-	597859	4,800–7,800	12,000	RBUS 8015/6 INOX 0,15
	15	19	0.30	50	-	153154	4,800–7,800	12,000	RBUS 8015/6 INOX 0,30
100	10	25	0.30	50	894637	658475	4,800–7,800	12,000	RBUS 10010/6 INOX 0,30

Brass wire (MES)

20	4	3	0.20	37	-	152997	8,000–13,000	20,000	RBUS 2004/6 MES 0,20
30	6	7	0.20	40	-	153024	8,000–13,000	20,000	RBUS 3006/6 MES 0,20
40	9	9	0.20	46	-	153055	7,200–11,700	18,000	RBUS 4009/6 MES 0,20
50	15	13	0.20	50	-	153086	6,000–9,800	15,000	RBUS 5015/6 MES 0,20
70	15	19	0.30	50	-	153116	6,000–9,800	15,000	RBUS 7015/6 MES 0,30
80	15	19	0.30	50	-	153147	4,800–7,800	12,000	RBUS 8015/6 MES 0,30

Continued on next page