## **SCHAEFFLER**

## Housing units RMEY55-XL (Series RMEY)




four-bolt flanged housing units, cast iron, centring spigot, grub screws in inner ring, R seals

The datasheet is only an overview of dimensions and basic load ratings of the selected product. Please always observe all the guidelines in these overview pages. Further information is given on many products under the menu item "Description". You can also order comprehensive information via the Catalogue ordering system (https://www.schaeffler.de/content.schaeffler.de/en/news\_media/index.jsp) or by telephone on +49 (91 32) 82 - 28 97.

d       55 mm         H       185 mm         B       55,6 mm         A       27,5 mm         A1       15 mm         J       150 mm         N       18 mm         Q       M6         S       3 mm         U       33,4 mm         Z       125 mm       Tolerance: h8			
A 27,5 mm  A1 15 mm  J 150 mm  N 18 mm  Q M6  S 3 mm  U 33,4 mm	d	55 mm	
A 27,5 mm  A1 15 mm  J 150 mm  N 18 mm  Q M6  S 3 mm  U 33,4 mm	Н	185 mm	
A1 15 mm  J 150 mm  N 18 mm  Q M6  S 3 mm  U 33,4 mm	В	55,6 mm	
A1 15 mm  J 150 mm  N 18 mm  Q M6  S 3 mm  U 33,4 mm			
J 150 mm  N 18 mm  Q M6  S 3 mm  U 33,4 mm	А	27,5 mm	
N 18 mm Q M6 S 3 mm U 33,4 mm	A1	15 mm	
Q M6 S 3 mm U 33,4 mm	J	150 mm	
S 3 mm U 33,4 mm	N	18 mm	
U 33,4 mm	Q	M6	
	S	3 mm	
Z 125 mm Tolerance: h8	U	33,4 mm	
	Z	125 mm	Tolerance: h8

## **SCHAEFFLER**

m	3,05 kg	Mass
Cr	46000 N	Basic dynamic load rating, radial
Cor	29000 N	Basic static load rating, radial
	ME11	Designation of housing
	GYE55-XL-KRR-B	Designation of bearing

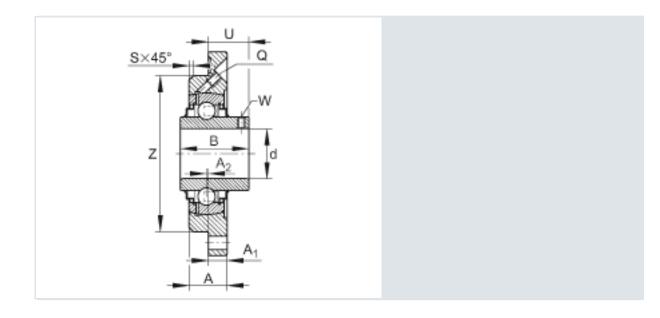

## **SCHAEFFLER**

