



threaded fittings

3698 male branch tee — tube to UNF, BSPP or M5 to tube

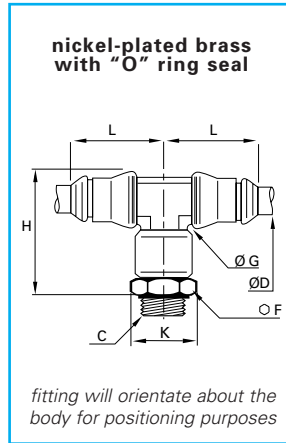

ØD in	C UNF	fractional inch	F mm	G in	H in	K in	L in	oz
5/32	10-32	3698 04 20	10	.39	1.00	.47	.71	.60
mm BSPP/M5	metric		mm	mm	mm	mm	mm	kg
4	M5x0.8	3698 04 19	10	10	27.5	11	18	.017
4	G1/8	3698 04 10	13	10	25.5	14	18	.022
6	G1/8	3698 06 10	13	12	31	14	21.5	.032
6	G1/4	3698 06 13	16	12	30.5	17.5	21.5	.038
8	G1/8	3698 08 10	14	15	33.5	15	23.5	.049
8	G1/4	3698 08 13	16	15	34	17.5	23.5	.053
10	G1/4	3698 10 13	18	17.5	42	19.5	29	.081
12	G3/8	3698 12 17	21	19.5	46	23	31	.112
14	G1/2	3698 14 21	24	21.5	49	26	34	.109


3693 male run tee — tube to tube to UNF, BSPP or M5

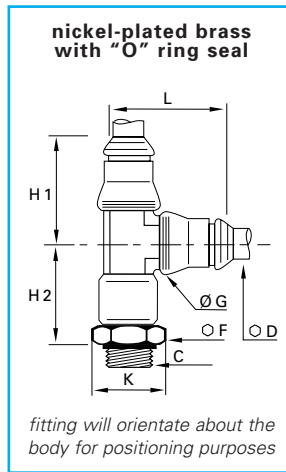

ØD in	C UNF	fractional inch	F mm	G in	H1 in	H2 in	K in	L in	oz
5/32	10-32	3693 04 20	10	.39	.71	.81	.47	.91	.64
mm BSPP/M5	metric		mm	mm	mm	mm	mm	mm	kg
4	M5x0.8	3693 04 19	10	10	18	22.5	11	23	.018
4	G1/8	3693 04 10	13	10	18	20.5	14	23	.021
6	G1/8	3693 06 10	13	12	21.5	25	14	28	.032
6	G1/4	3693 06 13	16	12	21.5	24.5	17.5	28	.039
8	G1/8	3693 08 10	14	15	23.5	26.5	15	31	.048
8	G1/4	3693 08 13	16	15	23.5	26.5	17.5	31	.053
10	G1/4	3693 10 13	18	17.5	29	33	19.5	37.5	.081
12	G3/8	3693 12 17	21	19.5	31	36.5	23	40.5	.111
14	G1/2	3693 14 21	24	21.5	34	38.5	26	45	.129

= suitable for food applications

3618 single banjo — metric tube to BSPP or M5

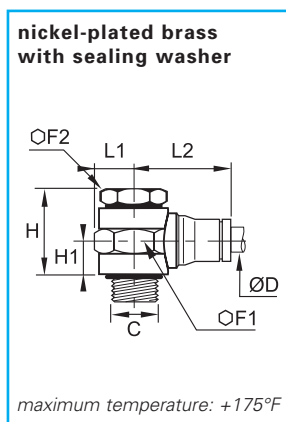

ØD mm	C BSPP/ metric	metric	F1 mm	F2 mm	H mm	H1 mm	L1 mm	L2 mm	kg
4	M5x0.8	3618 04 19	10	8	14.5	6.5	6	18.5	0.011
4	G1/8	3618 04 10	17	14	23	9.5	10	20.5	0.041
6	M5x0.8	3618 06 19	10	8	15	7	6	22.5	0.014
6	G1/8	3618 06 10	17	14	23	9.5	10	23.5	0.045
6	G1/4	3618 06 13	22	17	22	9	13	25.5	0.068
8	G1/8	3618 08 10	17	14	23	9.5	10	26	0.046
8	G1/4	3618 08 13	22	17	22	9	13	27.5	0.066
10	G3/8	3618 10 17	22	22	33	14	13	32	0.105

suitable for industrial applications only