

TECHNICAL DATASHEET

Update: 23/11/2020

Lu-5 DRY LUBRICANT WITH PTFE

Item #	EAN	Product
862390	3660338170898	Lubricant

Description

Non-oily lubricant aerosol.

Leaves a dry lubricant and protective polytetrafluoroethylene (PTFE) film. Very good non-sticking and mold release agent (resin, polyester, epoxy, elastomers...).

Eases the cleaning of spray booth walls.

Highly resistant to non-chlorinated nor fluorated acids or solvents.


Applications

Dry lubrication for plastic and metallic surfaces: belts, conveyor belts, miscellaneous machine equipment, joints, bearing bushing, ropes, metallic cables, bolts, swivels, screwed connections, door gudgeons, window or drawer slides, slide locks, paper, glass.



Gross volumeNet volumePropellant gasButane

- Components Please refer to the SDS

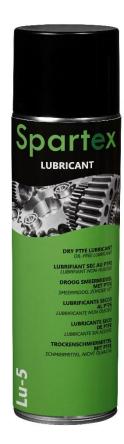

Instructions

Shake before use. Spray about 20cm from surface to treat. Wait a moment and wipe. Try firstly on a hidden part.

Packaging

- Unit
- Carton of 12 aerosols