




Technical datasheet

NJ2215EG1C3

Single row cylindrical roller bearings

Single row cylindrical roller bearing, single direction for axial loads, separable, brass cage.

Visual(s)

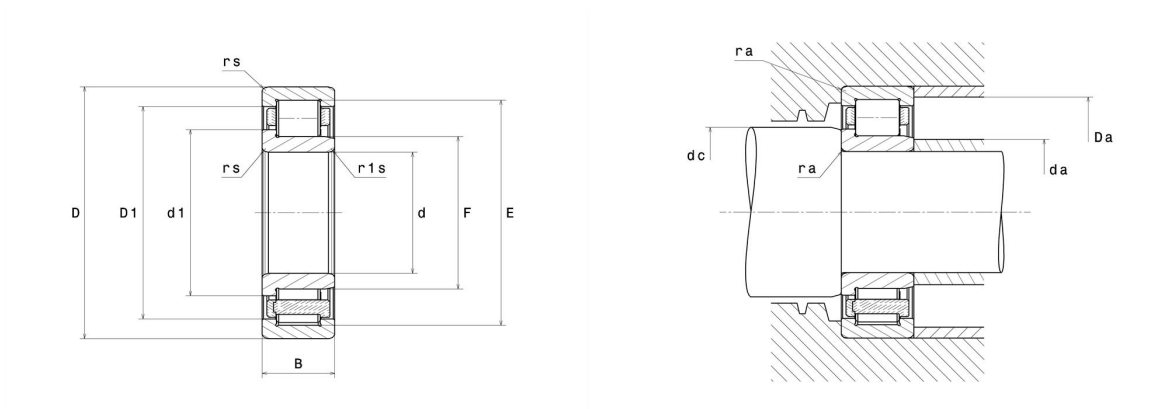

Product definition

d	75 mm
D	130 mm
B	31 mm
E	118.5 mm
F	88.5 mm
d1	94.5 mm
rs min	1.5 mm
r1s min	1.5 mm
Radial clearance class	C3
Mass (without HJ ring)	1.7 kg
Brand	NTN

Product performance

Dynamic load, C	162 kN
Static load, C0	207 kN
Fatigue limit load, Cu	25.1 kN
Nlim (oil)	4,900 rpm
Nlim (grease)	4,200 rpm
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.43 Hz
Characteristic rolling element frequency, BSF	6.76 Hz
Characteristic outer ring frequency, BPF0	7.7 Hz
Characteristic inner ring frequency, BPFI	10.3 Hz

Abutment dimensions

da min	83 mm
da max	87 mm
dc min	96 mm
Da max	122 mm
ra max	1.5 mm

Calculation factors

Equivalent dynamic radial load

$$P = Fr$$

Equivalent static radial load

$$Po = Fr$$