



bulkhead connectors

3616 bulkhead connector — fractional inch tube to tube




ØD in		F1 mm	F2 mm	K in	L1 in	L2 in	T in	kg
5/32	3616 04 00	13	14	.55	.55	.79	.49	.64
1/4	3616 56 00	16	17	.69	.67	.89	.59	1.06
5/16	3616 08 00	18	19	.77	.73	.93	.67	1.34
3/8	3616 60 00	22	27	.95	.87	1.10	.85	2.29
1/2	3616 62 00	24	24	1.16	.89	1.14	1.04	2.50

3616 bulkhead connector — metric tube to tube




ØD mm		F1 mm	F2 mm	K mm	L1 mm	L2 mm	T mm	kg
4	3616 04 00	13	14	14	14	20	12.5	.018
6	3616 06 00	16	17	17.5	17	22	15	.030
8	3616 08 00	18	19	19.5	18.5	23.5	17	.038
10	3616 10 00	22	27	24	21.5	26.5	21	.065
12	3616 12 00	24	24	26	23	27	23	.071
14	3616 14 00	27	27	29.5	25.5	29.5	25	.098

3636 female bulkhead connector — metric tube to BSPP



ØD mm	C BSPP		F1 mm	F2 mm	H mm	H1 mm	K mm	T mm	kg
4	G1/8	3636 04 10	14	14	30.5	11	15	13	.024
6	G1/8	3636 06 10	17	17	32.5	11	18.5	15	.032
6	G1/4	3636 06 13	17	17	37	15	18.5	15	.036
8	G1/8	3636 08 10	19	19	34	10.5	21	17	.041
8	G1/4	3636 08 13	19	19	38	14.5	21	17	.040
10	G3/8	3636 10 17	22	27	42.5	16	24	21	.075
12	G3/8	3636 12 17	24	24	43	16	26	23	.092
12	G1/2	3636 12 21	27	24	48.5	21.5	29.5	23	.116

3639 bulkhead elbow — metric tube to tube

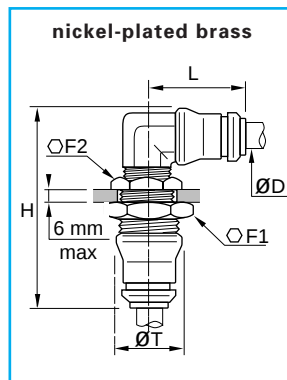

ØD mm		F1 mm	F2 mm	H mm	K mm	L mm	T mm	kg
4	3639 04 00	13	14	35	14	18	12.5	.024
6	3639 06 00	16	17	40.5	17.5	21.5	15	.038
8	3639 08 00	18	19	44	19.5	23.5	17	.054
10	3639 10 00	22	27	51	24	29	21	.088
12	3639 12 00	24	24	55	26	31	23	.117
14	3639 14 00	27	27	59	29.5	34	25	.144

 = suitable for food applications

Fittings will orientate about the body for positioning purpose.