

Product Data Sheet



Product Code:

Issue No.

Issue Date:

Issue by:

31006/4 - 31063/4

C

17.01.11

D.B.P

Description

Triple Pole MCBs Type D 10kA


General Characteristics

Standards	BSEN60898
Current ratings (In)	6, 10, 16, 20, 32, 40, 50 & 63A
Voltage rating (Ue)	230/400V a.c.
Frequency	50 - 60Hz
Type	D (10-20xIn)
Enclosure material	Flame Retardant PA
Colour	Light Grey - RAL7035
IP Rating	IP20
Cable Entry Facility	Box Terminals
No of Modules	3
No. of Poles	3
Short Circuit rating (kA)	10kA (*)
Terminal capacity (In)	25mm ²
Terminal capacity (Out)	25mm ²
Busbar connectivity	upto 2mm thick forked copper busbar
Terminal Tightening Torque	2 - 2.5Nm
Calibration Temperature	30C
Operating temperature	-5C to +55C



Device shown is 3pole 6A Type B unit

Dimensions

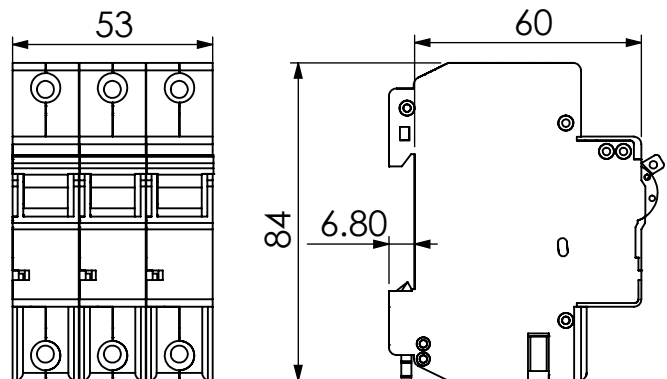

Product coding

3	10	XX	/4
No. of Poles 3	kA 10 * 50A and 63A rated 6kA	In 06 10 16 20 32 40 50 63	Type D

Earth Fault Loop Impedance (Zs max at 240V)

(In)	Max Zs (@0.4sec)	Max Zs (@5sec)
6	2.00	8.89
10	1.20	5.33
16	0.75	3.33
20	0.60	2.67
32	0.38	1.67
40	0.30	1.33
50	0.24	1.07
63	0.19	0.85

