



# **HPI-T**

## HPI-T 1000W/543 E40 1SL/4

Quartz metal halide lamps with clear outer bulb

#### **Warnings and Safety**

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- For use with control gear designed for high-pressure mercury lamps
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

#### **Product data**

General Information	
Cap base	E40 [ E40]
Operating position	P [ Parallel or Horizontal(HOR)]
Life to 5% failures (nom.)	3000 h
Life to 10% failures (nom.)	5500 h
Life to 20% failures (nom.)	8000 h
Life to 50% failures (nom.)	12000 h
System description	na [ -]
Light Technical	
Colour Code	543 [ CCT of 4,300 K]
Luminous flux (rated) (min.)	73890 lm
Luminous flux (rated) (nom.)	82100 lm
Colour designation	Cool White (CW)
Lumen maintenance 10,000 hours (nom.)	75 %
Lumen maintenance 2,000 hours (nom.)	87 %
Lumen maintenance 5,000 hours (nom.)	80 %
Chromaticity coordinate X (nom.)	370

Chromaticity coordinate Y (nom.)	380
Correlated Colour Temperature (Nom)	4300 K
Luminous efficacy (rated) (nom.)	83 lm/W
Colour rendering index (nom.)	57
Operating and Electrical	
Lamp supply voltage	220 V [ 220]
Power (Rated) (Nom)	990 W
Lamp current run-up (max.)	14.2 A
Lamp current (EM) (nom.)	8.25 A
Ignition supply voltage (max.)	198 V
Ignition supply voltage (min.)	198 V
Ignition time (max.)	30 s
Voltage (Max)	140 V
Voltage (Min)	120 V
Voltage (Nom)	130 V


Datasheet, 2022, January 14 data subject to change

## HPI-T


Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Lamp Finish	Clear
Bulb shape	T65 [ T 65mm]
Approval and Application	
Mercury (Hg) content (nom.)	86 mg
Energy consumption kWh/1,000 hours	1089 kWh
Luminaire Design Requirements	
Bulb temperature (max.)	555 ℃
Cap-base temperature (max.)	300 ℃

Product Data	
Full product code	871150018373645
Order product name	HPI-T 1000W/543 E40 1SL/4
EAN/UPC – product	8711500183736
Order code	18373645
Local order code	1000HPIT
SAP numerator – quantity per pack	1
Numerator – packs per outer box	4
SAP material	928482600096
SAP net weight (piece)	0.426 kg


## Dimensional drawing



HPI-T 1000W/543 E40 1SL/4




#### Photometric data

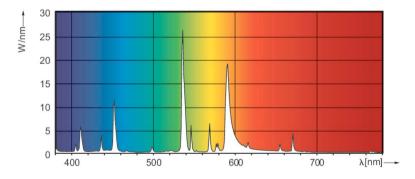


LDPO\_HPI-THW-Spectral power distribution Colour

## HPI-T

#### Lifetime

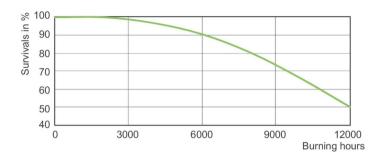

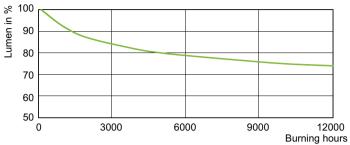

LDLE\_HPI-THW\_0003-Life expectancy diagram

LDLM\_HPI-THW\_0003-Lumen maintenance diagram

