


Technical data

NA4909LL/3AS

Needle roller bearing, machined-ring, with inner ring

VISUAL (S)

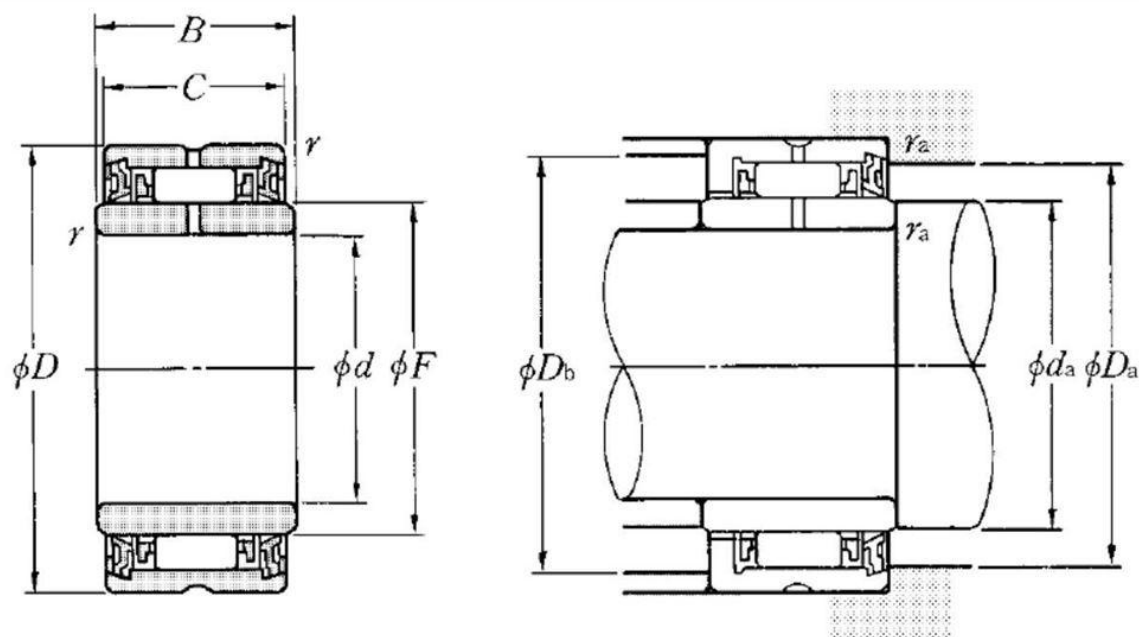

PRODUCT DEFINITION

Brand	NTN
d - Internal diameter	45 mm
D - External diameter	68 mm
B - Bearing/Inner ring width	23 mm
C - Width of bearing, drawn cup or outer ring	22 mm
F - Under roller diameter	52 mm
rs - Min fillet radius	0,6 mm
Lubrication hole on outer ring	Yes
k - Hole diameter	3 mm

NA4909LL/3AS

Needle roller bearing, machined-ring, with inner ring

PRODUCT DEFINITION

Lubrication hole on inner ring	Yes
Radial clearance class	CN
Precision class	P0
Mass	0,29 kg

PRODUCT PERFORMANCE

Cr - Dynamic load rating	28,6 kN
C0r - Static load rating	57 kN
Nlim - Grease lubrication limit speed	3800 tr/min
Tmin - Min operating temperature	-20 °C
Tmax - Max operating temperature	100 °C

ABUTMENT

da min - Min shoulder diameter IR	49 mm
Da max - Max shoulder diameter OR	55 mm
Db max - Max OR shoulder diameter	64 mm
ras max - Max shaft & housing fillet radius	0,6 mm