




Technical datasheet

N310ET2XC3

Single row cylindrical roller bearings

Single row cylindrical roller bearing, floating, separable, polyamide cage

Visual(s)

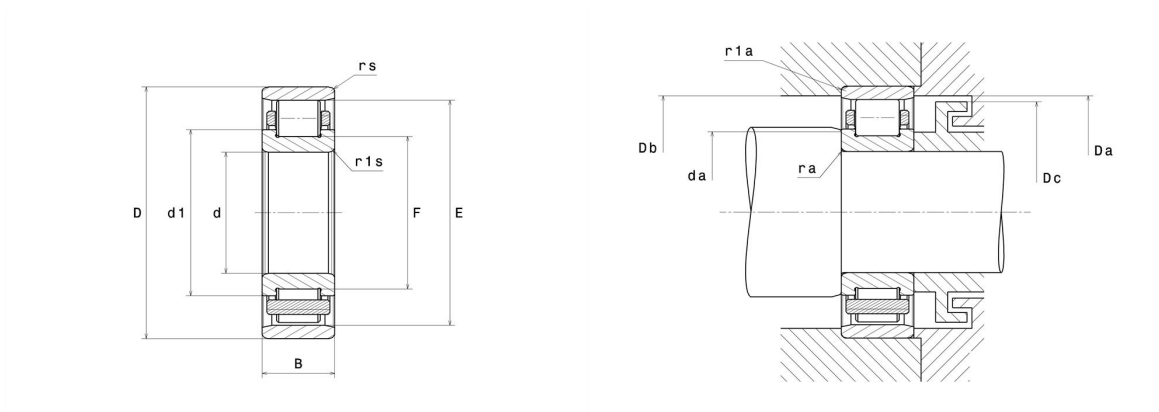

Product definition

d	50 mm
D	110 mm
B	27 mm
E	97 mm
F	65 mm
d1	71.4 mm
rs min	2 mm
r1s min	2 mm
Radial clearance class	C3
Mass (without HJ ring)	1.14 kg
Brand	NTN

Product performance

Dynamic load, C	110 kN
Static load, C0	113 kN
Fatigue limit load, Cu	13.8 kN
Nlim (oil)	6,900 rpm
Nlim (grease)	5,900 rpm
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.4 Hz
Characteristic rolling element frequency, BSF	4.86 Hz
Characteristic outer ring frequency, BPF0	5.22 Hz
Characteristic inner ring frequency, BPFI	7.78 Hz

Abutment dimensions

da min	59 mm
Da max	101 mm
Db min	99 mm
Dc max	95 mm
ra max	2 mm
r1a max	2 mm

Calculation factors

Equivalent dynamic radial load

$$P = Fr$$

Equivalent static radial load

$$Po = Fr$$