





SYNCHRONOUS BELTS FOR SUBSTANTIALLY INCREASED POWER RATING



POWERGRIP® GT3 8MGT & 14MGT

Rubber synchronous belt with optimised GT tooth profile

PowerGrip® GT3 is made of a highly advanced combination of materials. This new, technically advanced belt covers the widest range of industrial applications. The PowerGrip® GT3 synchronous belt transmits up to 30% more power than previous generation belts (PowerGrip® GT2). This entire belt range is suited both for new drive designs as for replacements on existing drives without any adaptation of the system. The 8MGT and 14MGT pitches are the optimum choice for high performance drives in the machine tool, paper and textile industries where durability and low maintenance are required.

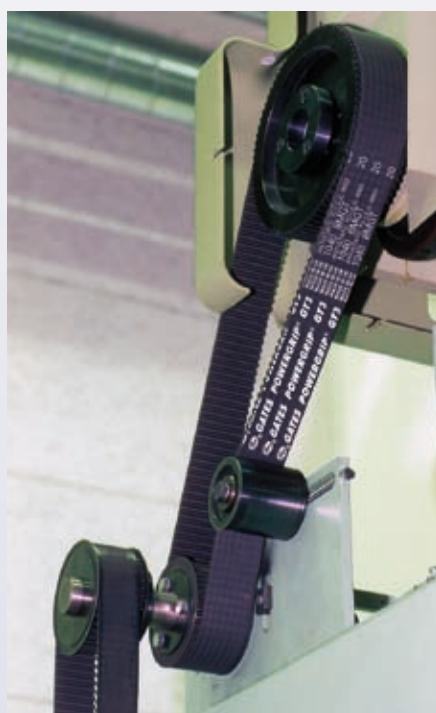

Identification

Three part number on the back of the belt indicating pitch, belt length and width.


Construction

- Technically advanced compound with fibreglass tensile cord, elastomeric teeth and backing and nylon facing.
- Elastomeric backing protects the cords from environmental pollution and frictional wear.
- Helically wound tensile member gives enormous strength, flex life and elongation resistance.
- Low friction nylon facing protects the tooth surface against wear.
- Precision-formed and accurately spaced elastomeric teeth.
- Silicone-free and therefore suited for painting processes.

Advantages

- Substantially increased power ratings: up to 30% more than previous constructions.
- Reduced maintenance costs thanks to longer service life.
- Compact, light-weight and cost-effective drives.
- High tooth jump resistance.
- No lubrication needed.
- **Static conductive (ISO 9563)** and can as such be used in the conditions described in the Directive 94/9/EC - ATEX.
- Used on HTD® type pulleys.

Sections and nominal dimensions



	Pitch mm	T mm	B mm
8MGT	8.00	3.40	5.60
14MGT	14.00	6.00	10.00

NOTE

For correct usage of the belt please request Gates' Synchronous Belt Drive Design Manual (E2/20099).



8MGT

Pitch: 8 mm

Description	Pitch length mm	Number of teeth
384-8MGT3	384	48
480-8MGT3	480	60
560-8MGT3	560	70
600-8MGT3	600	75
640-8MGT3	640	80
720-8MGT3	720	90
800-8MGT3	800	100
840-8MGT3	840	105
880-8MGT3	880	110
920-8MGT3	920	115
960-8MGT3	960	120
1040-8MGT3	1040	130
1064-8MGT3	1064	133
1120-8MGT3	1120	140
1160-8MGT3	1160	145
1200-8MGT3	1200	150
1280-8MGT3	1280	160
1440-8MGT3	1440	180
1512-8MGT3	1512	189
1584-8MGT3	1584	198
1600-8MGT3	1600	200
1760-8MGT3	1760	220
1800-8MGT3	1800	225
2000-8MGT3	2000	250
2400-8MGT3	2400	300
2600-8MGT3	2600	325
2800-8MGT3	2800	350
3048-8MGT3	3048	381
3280-8MGT3	3280	410
3600-8MGT3	3600	450
4400-8MGT3	4400	550

Available in widths of 20 mm, 30 mm, 50 mm and 85 mm.

14MGT

Pitch: 14 mm

Description	Pitch length mm	Number of teeth
966-14MGT3	966	69
1190-14MGT3	1190	85
1400-14MGT3	1400	100
1610-14MGT3	1610	115
1750-14MGT3	1750	125
1778-14MGT3	1778	127
1890-14MGT3	1890	135
2100-14MGT3	2100	150
2310-14MGT3	2310	165
2450-14MGT3	2450	175
2590-14MGT3	2590	185
2800-14MGT3	2800	200
3150-14MGT3	3150	225
3360-14MGT3	3360	240
3500-14MGT3	3500	250
3850-14MGT3	3850	275
4326-14MGT3	4326	309
4578-14MGT3	4578	327
4956-14MGT3	4956	354
5320-14MGT3	5320	380
5740-14MGT3	5740	410
6160-14MGT3	6160	440
6860-14MGT3	6860	490

Available in widths of 40 mm, 55 mm, 85 mm, 115 mm and 170 mm.

PowerGrip® GT3 ordering code is composed as follows:

384-8MGT3-20

384 - Pitch length (mm)

8MGT3 - Pitch 8 mm

20 - Belt width (mm)

All dimensions are available from stock.