



Technical data

USPE.206


Bearing units

Grey cast housing, radial insert ball bearing with socket set screws, single lip seal

KIT CONTENT

US206G2, PE206

VISUAL (S)

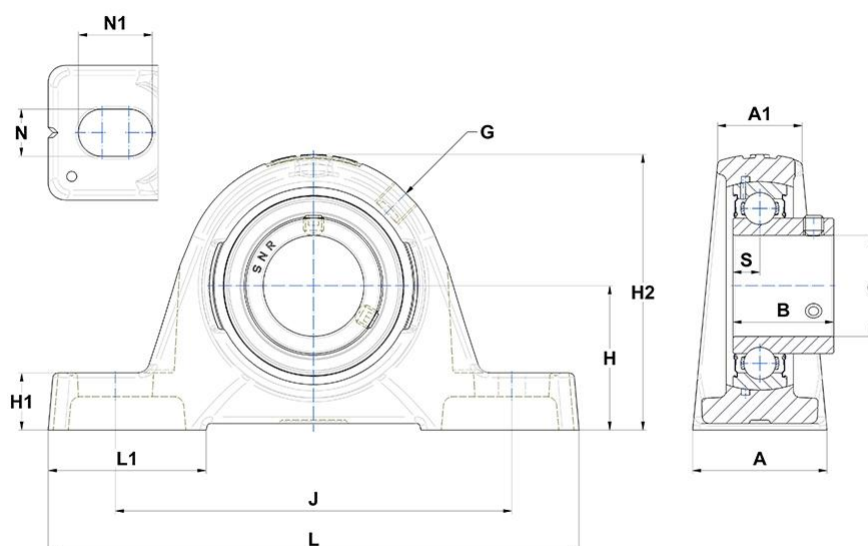

PRODUCT DEFINITION

Brand	SNR
A - Housing width	40 mm
A1 - Housing top width	25 mm
B - Width of Inner Ring	30 mm
d - Shaft diameter	30 mm
G - Grease fitting	R1/8"

PRODUCT DEFINITION

H - Distance mounting base to centerline spheric. seating diam.	42,9 mm
H1 - Housing foot height	17 mm
H2 - Housing height	82 mm
J - Mounting holes distance	118 mm
L - Housing length	158 mm
L1 - Housing foot length	47 mm
N - Mounting hole dimension	14 mm
N1 - Mounting hole length	22 mm
S - Distance front side/bearing centre	8 mm

PRODUCT PERFORMANCE

C - Dynamic load rating	19,5 kN
C0 - Static load rating	11,2 kN
Operating temperature min.	-20 °C
Operating temperature max.	100 °C

OTHER FEATURES

Mass	1,07 kg
Recommended tightening torque for set screw	5.5 N-m