


**EGW22-E40** [↗](#)

Thrust washer



Thrust washer, maintenance-free, material in accordance with ISO 3547-4, with steel backing

Technical information

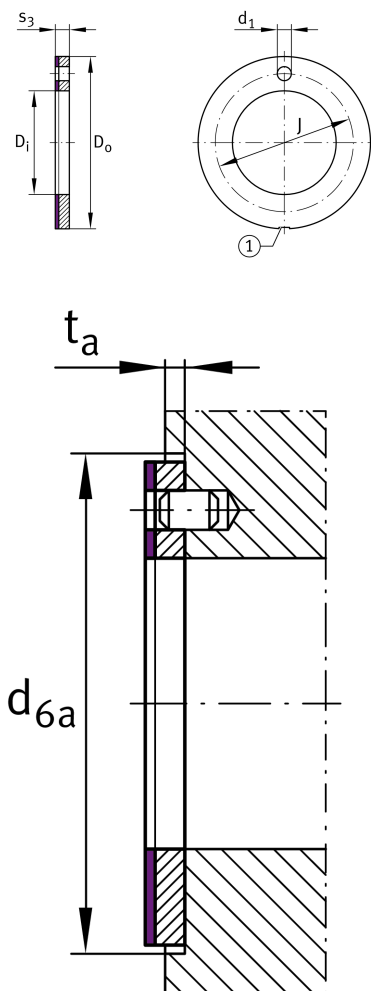

Main Dimensions & Performance Data

D_i	22 mm	Inner diameter
s_3	1,5 mm	Wall thickness
C_a	106.000 N	Basic dynamic load rating, axial
C_{0a}	188.000 N	Basic static load rating, axial
D_o	38 mm	Outer Diameter
$\approx m$	8,795 g	Weight

Dimensions

J	30 mm	Pitch circle
d_1	3 mm	Fixing hole diameter
t_a	1 mm	Mounting dimension
d_{6a}	38 mm	Mounting dimension d_{6a}
D_{iOT}	0,25 mm	Inner diameter, upper tolerance
D_{iUT}	0 mm	Inner diameter, lower tolerance
D_{oOT}	0 mm	Outside diameter, upper tolerance
D_{oUT}	-0,25 mm	Outside diameter, lower tolerance
s_{3OT}	0 mm	Wall thickness, upper tolerance
s_{3UT}	-0,05 mm	Wall thickness, lower tolerance
J_{OT}	0,12 mm	Pitch circle, upper tolerance
J_{UT}	-0,12 mm	Pitch circle, lower tolerance
d_{1OT}	0,4 mm	Fixing hole diameter, upper tolerance
d_{1UT}	0,1 mm	Fixing hole diameter, lower tolerance
t_{aOT}	0,2 mm	Mounting dimension, upper tolerance
t_{aUT}	-0,2 mm	Mounting dimension, lower tolerance
d_{6aOT}	0,12 mm	Mounting dimension d_{6a} , upper tolerance
d_{6aUT}	0 mm	Mounting dimension d_{6a} , lower tolerance



View product details on medias

10.05.2024, 16:11:50 IST

SCHAEFFLER

Temperature range

T _{min}	-200 °C	Operating temperature min.
T _{max}	280 °C	Operating temperature max.