





Supplement to the product catalogue with special solutions for safety-related applications

On/off valve HEE with switching position monitoring

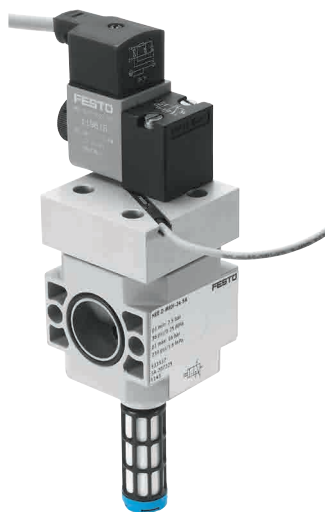


Technical data



-  Voltage
24 V DC
-  Operating pressure
2.5 ... 16 bar
-  Temperature range
-10 ... +60 °C

Function

For sensing the piston position of the on/off valve, standard sensors with reed contacts can be used for the T-slot: type SME-8M, SMT-8M, SME-8, SMT-8

Circuit symbol



	 
Cat.	Can be used in systems of a higher category with additional measures
PL	
DC	Switching position sensing
Ducts	1
Safety device in accordance with EC MD 2006/42/EC	No

Part no.	Type
533537	HEE-D-MIDI-...-SA207225
548535	HEE-D-MAXI-...-SA217173

All specified values are maximum values that can be achieved by operating the component correctly.