


Commercial Black Rubber

General purpose grade for water applications and diluted chemicals

- Versatile 'general purpose' grade rubber sheeting, often used in marine applications.
- Ideal for low cost waterproof seals and gaskets.
- 68 degrees shore A hardness.
- Tensile strength at break: 3.0 Mpa.
- Elongation at break: 200%.

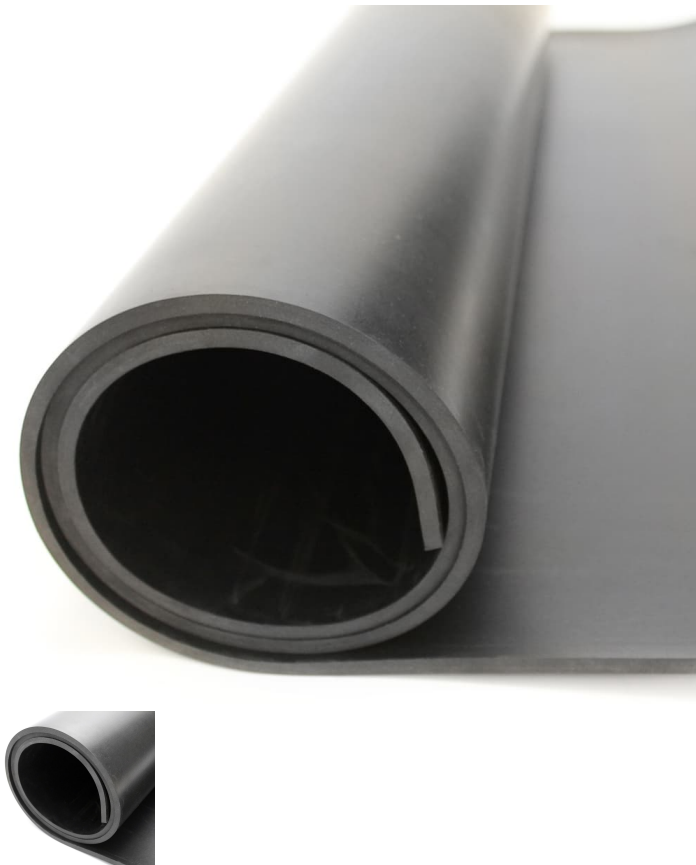

Parts

Part Number	Size	Colour	Weight
CRS00001	1.4 m x 10 m x 1.5 mm	Black	36.00 kg
CRS00002	1.4 m x 10 m x 3 mm	Black	68.65 kg
CRS00003	1.4 m x 10 m x 4.5 mm	Black	104.10 kg
CRS00004	1.4 m x 10 m x 6 mm	Black	136.05 kg
CRS00005	1.4 m x 5 m x 8 mm	Black	88.80 kg
CRS00006	1.4 m x 5 m x 10 mm	Black	115.55 kg
CRS00007	1.4 m x 5 m x 12 mm	Black	130.85 kg
CRS00008	1.4 m x 5 m x 20 mm	Black	225.00 kg
CRS00009	1.4 m x 5 m x 25 mm	Black	270.00 kg

Technical Specification

Material	SBR
Surface Finish	Smooth
Product Height	1.5 mm-25 mm
Roll Length	5 m or 10 m
Operating Temperature	-30°C to +80°C
Resistance to Chemicals	Resistant to dilute chemicals
Other Product Performance Information	Test Temperature 25°C Relative Humidity 35% Test by GB5574-94 Correlation criterion GB/T528-1998 GB/T3512-1989 GB/T531-1992
Country of Origin	China