


ANSI HEAVY DUTY ROLLER CHAIN

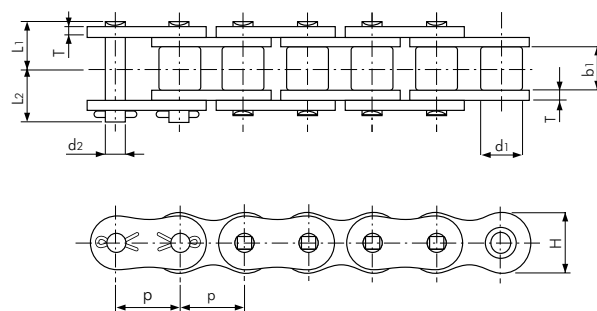

HT Series

Dimensions in mm

[illegible]

Note:

1. Semi press-fit type connecting links are supplied.
2. Standard ANSI sprockets can be used for single strand chain.
3. Sprockets with a low teeth number must have hardened teeth.
4. Steel grade of sprockets must be C45 or higher.
5. Multi strand chains are available on request.
6. Pins are quad riveted.