



The Timken Company

4500 Mt Pleasant St. NW


N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: CustomerCAD@timken.com • Web site: www.timken.com

Timken Part Number 07097 - 07205, Tapered Roller Bearings - TS (Tapered Single) Imperial

This is the most basic and most widely used type of tapered roller bearing. It consists of two main separable parts: the cone (inner ring) assembly and the cup (outer ring). It is typically mounted in opposing pairs on a shaft.

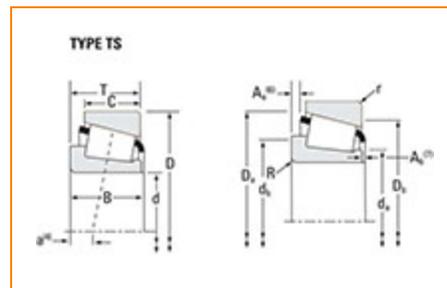

[Specifications](#) | [Dimensions](#) | [Abutment and Fillet Dimensions](#) | [Basic Load Ratings](#) | [Factors](#)

Specifications

Series	07000
Cone Part Number	07097
Cup Part Number	07205
Design Units	Imperial
Bearing Weight	0.10 Kg 0.3 lb
Cage Type	Stamped Steel

Dimensions

d - Bore	25.001 mm 0.9843 in
----------	------------------------

D - Cup Outer Diameter	51.999 mm 2.0472 in
B - Cone Width	14.260 mm 0.5614 in
C - Cup Width	12.700 mm 0.5000 in
T - Bearing Width	15.011 mm 0.5910 in

Abutment and Fillet Dimensions

R - Cone Backface "To Clear" Radius¹	1.520 mm 0.06 in
r - Cup Backface "To Clear" Radius²	2.03 mm 0.08 in
da - Cone Frontface Backing Diameter	28.96 mm 1.14 in
db - Cone Backface Backing Diameter	30.99 mm 1.22 in
Da - Cup Frontface Backing Diameter	48.51 mm 1.91 in
Db - Cup Backface Backing Diameter	44.45 mm 1.75 in
Ab - Cage-Cone Frontface Clearance	2 mm 0.08 in
Aa - Cage-Cone Backface Clearance	0 mm 0 in
a - Effective Center Location³	-2.8 mm -0.11 in

Basic Load Ratings

C90 - Dynamic Radial Rating (90 million revolutions)⁴	1700 lbf 7550 N
C1 - Dynamic Radial Rating (1 million revolutions)⁵	6540 lbf 29100 N
C0 - Static Radial Rating	6650 lbf 29600 N
C_{a90} - Dynamic Thrust Rating (90 million revolutions)⁶	1170 lbf 5190 N

Factors

K - Factor⁷	1.45
e - ISO Factor⁸	0.4
Y - ISO Factor⁹	1.49
G1 - Heat Generation Factor (Roller-Raceway)	7.6
G2 - Heat Generation Factor (Rib-Roller End)	7.07
C_g - Geometry Factor¹⁰	0.0509

¹ These maximum fillet radii will be cleared by the bearing corners.

² These maximum fillet radii will be cleared by the bearing corners.

³ Negative value indicates effective center inside cone backface.

⁴ Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values.

⁵ Based on 1×10^6 revolutions L_{10} life, for the ISO life calculation method.


⁶ Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values for a single-row, $C_{90(2)}$ is the two-row radial value.

⁷ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

⁸ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

⁹ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

¹⁰ Geometry constant for Lubrication Life Adjustment Factor a3l.

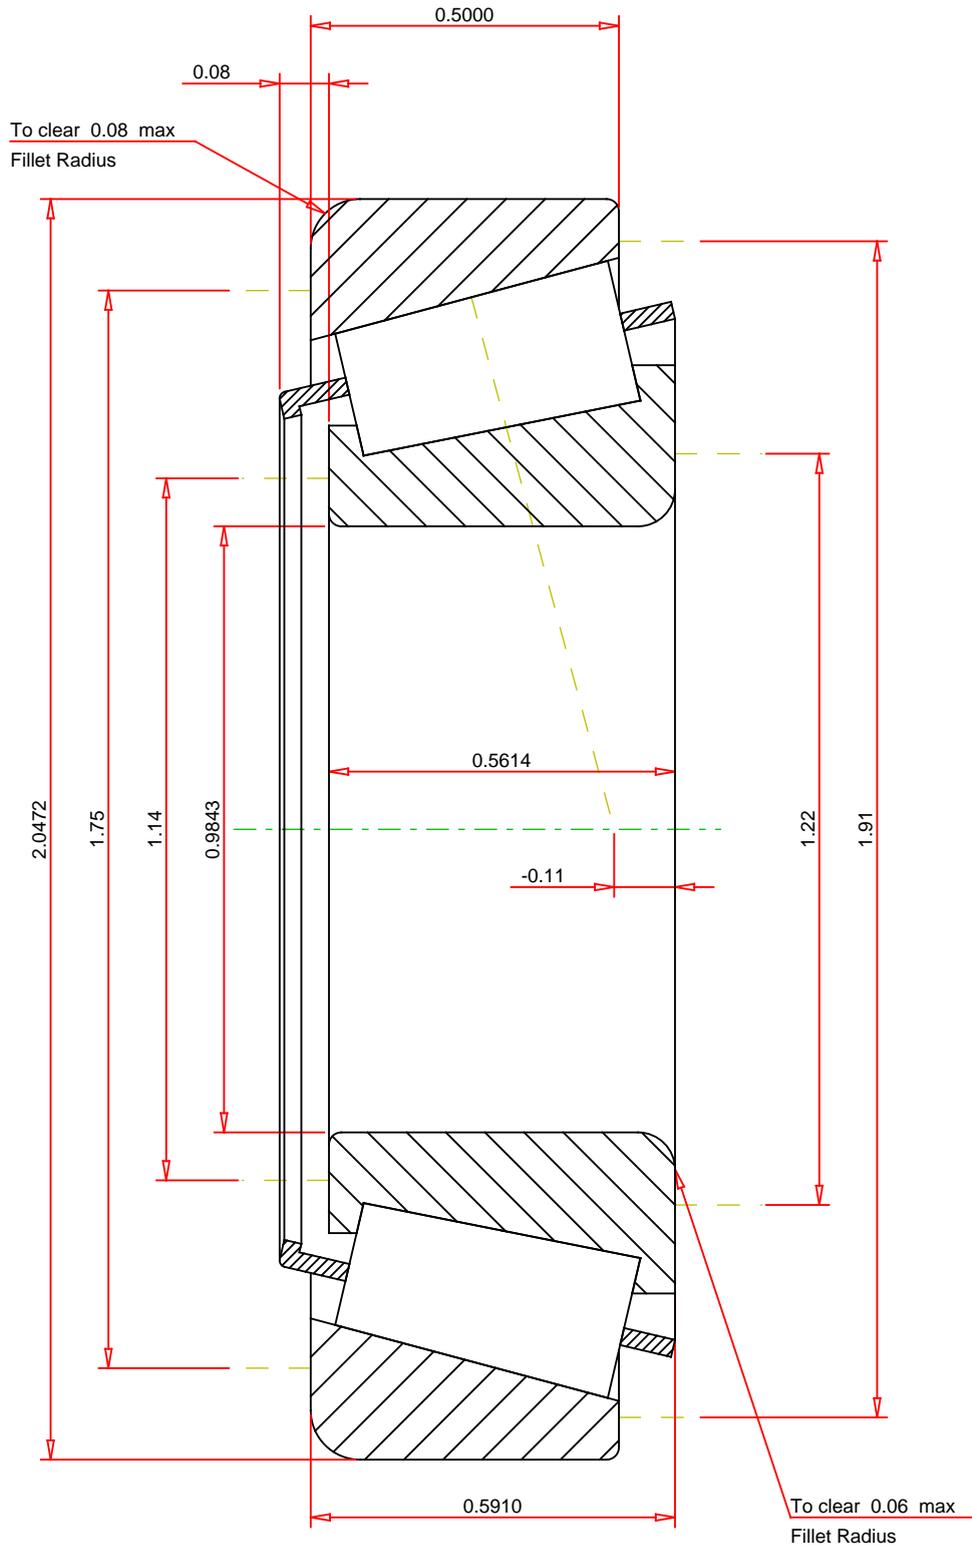

IMPERIAL UNITS

ISO Factor - e	0.4
ISO Factor - Y	1.49
Bearing Weight	0.3 lb
Number of Rollers Per Row	16
Effective Center Location	-0.11 inch

TIMKEN®

07097 - 07205
TS BEARING ASSEMBLY

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

K Factor	1.45
Dynamic Radial Rating - C90	1700 lbf
Dynamic Thrust Rating - Ca90	1170 lbf
Static Radial Rating - C0	6650 lbf
Dynamic Radial Rating - C1	6540 lbf

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY