

Technical Data Sheet

Classical V belts


A profile

Dimensions

Top width B(mm)	13
Height H(mm)	8
Angle α (°)	40

Constructions and materials

1	Top SBR rubber
2	Polyester cord
3	Base SBR rubber
4	Fabric heavily coated in Chloroprene

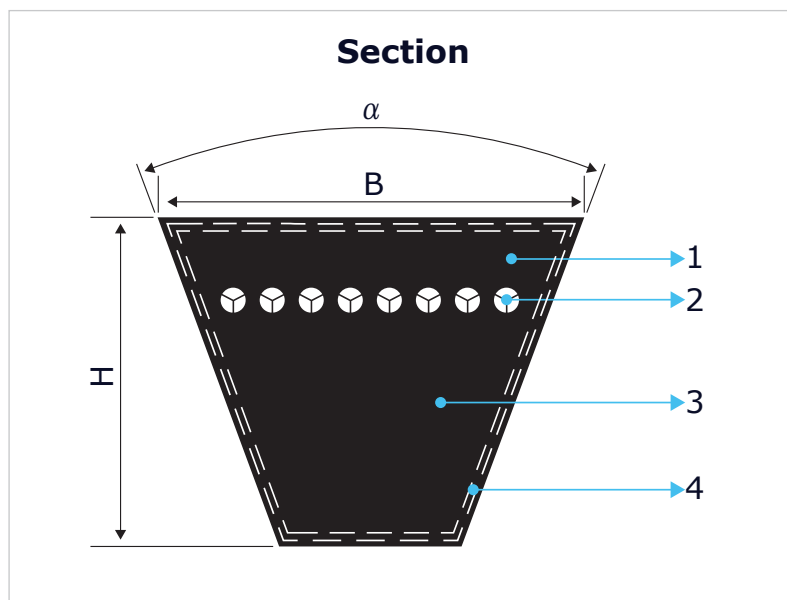

Belt label:

Mecaline

HEAT & OIL RESISTANT
ANTI STATIC

A23.5/A630

Profile
and length

A13X596Li

Width and
inside length

888814

Rubix
ENG code

0921


Manuf.
Date

Standards:

Working Temperature -40 to +70C

- BS 3790 / DIN 2215 PART 1 / ISO 4184
- Anti-static to ISO 1813
- Meets RoHs and REACH requirements
- Length range:490-4610mm
- Weight:0.108 kg/m

Length measurement:

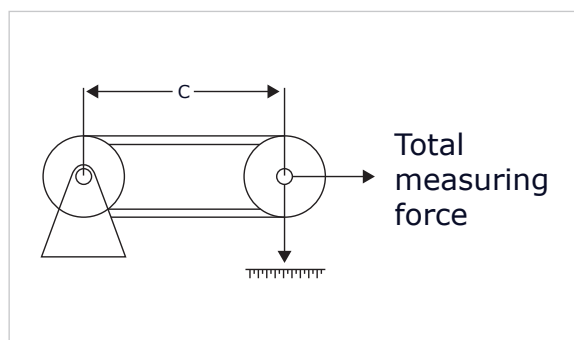

Measuring pulley datum diameter (mm)	95.5
Effective datum circumference (mm)	300
Centre distance (mm)	C
Datum width (mm)	11
Groove angle α (°)	38
Measuring force per belt (N)	196
Belt length: $L_d = 2C + 300$	