
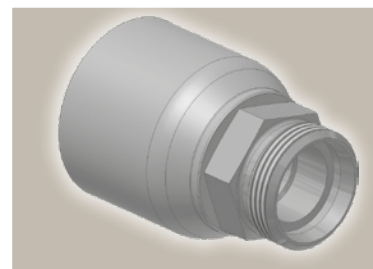


## D0 Male Metric 24° Light Series – Rigid Straight



ISO 12151-2-S-L – CEL



| Part Number  | Hose I.D. |      |      |      | Thread<br>metric | Tube<br>O.D.<br>mm | A<br>mm | B<br>mm | H<br>mm |
|--------------|-----------|------|------|------|------------------|--------------------|---------|---------|---------|
|              | DN        | Inch | Size | mm   |                  |                    |         |         |         |
| 1D070-12-6C  | 10        | 3/8  | -6   | 9.5  | M18x1.5          | 12                 | 52      | 23      | 19      |
| 1D070-15-8C  | 12        | 1/2  | -8   | 12.7 | M22x1.5          | 15                 | 60      | 26      | 22      |
| 1D070-18-10C | 16        | 5/8  | -10  | 15.9 | M26x1.5          | 18                 | 65      | 28      | 27      |
| 1D070-22-12C | 19        | 3/4  | -12  | 19.1 | M30x2            | 22                 | 69      | 30      | 30      |
| 1D070-28-16C | 25        | 1    | -16  | 25.4 | M36x2            | 28                 | 79      | 32      | 36      |

## C9 Female Metric 24° – Swivel Heavy Series with O-Ring Straight

ISO 12151-2-SWS-S – DKOS

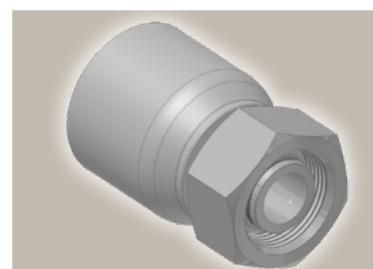

| Part Number  | Hose I.D. |      |      |      | Thread<br>metric | Tube<br>O.D.<br>mm | A<br>mm | B<br>mm | W<br>mm |
|--------------|-----------|------|------|------|------------------|--------------------|---------|---------|---------|
|              | DN        | Inch | Size | mm   |                  |                    |         |         |         |
| 1C970-10-6C  | 10        | 3/8  | -6   | 9.5  | M18x1.5          | 10                 | 52      | 23      | 22      |
| 1C970-12-6C  | 10        | 3/8  | -6   | 9.5  | M20x1.5          | 12                 | 52      | 23      | 24      |
| 1C970-14-6C  | 10        | 3/8  | -6   | 9.5  | M22x1.5          | 14                 | 53      | 24      | 27      |
| 1C970-12-8C  | 12        | 1/2  | -8   | 12.7 | M20x1.5          | 12                 | 60      | 25      | 24      |
| 1C970-16-8C  | 12        | 1/2  | -8   | 12.7 | M24x1.5          | 16                 | 59      | 24      | 30      |
| 1C970-20-10C | 16        | 5/8  | -10  | 15.9 | M30x2            | 20                 | 66      | 27      | 36      |
| 1C970-20-12C | 19        | 3/4  | -12  | 19.1 | M30x2            | 20                 | 66      | 27      | 36      |
| 1C970-25-12C | 19        | 3/4  | -12  | 19.1 | M36x2            | 25                 | 67      | 28      | 46      |
| 1C970-25-16C | 25        | 1    | -16  | 25.4 | M36x2            | 25                 | 78      | 33      | 46      |
| 1C970-30-16C | 25        | 1    | -16  | 25.4 | M42x2            | 30                 | 80      | 33      | 50      |

Hose fittings are delivered with ozone resistant Nitrile (NBR) O-ring as a standard version. Working temperature from -40 °C up to +105 °C.

Hose fittings with special O-rings (Viton or EPDM) available on request. O-ring dimensions and part-numbers see catalogue CAT/4400/UK section Eb.

Approved **fitting series** for hose types:

Also available in steel. Details can be found in catalogue CAT/C4400/UK.

**70** 371LT 372 372TC 372RH 701