


PILLOW BLOCK ASSEMBLY COMPONENTS AND DIMENSIONS

FOR SHAFT DIAMETERS 45 TO 65 MM, 1 11/16" TO 2 1/2"

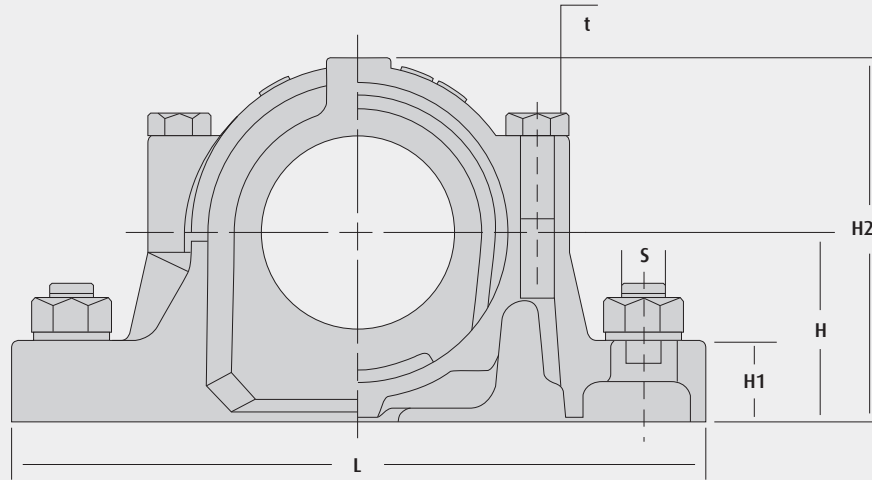

SHAFT DIAMETER			PILLOW BLOCK ASSEMBLY COMPONENTS													
mm	in1	in2	Pillow Block	Basic Bearing		Adapter Sleeve			Seal Options			Fixing Ring		Endcover	Weight (kg)	
				ball	roller	metric	in1	in2	G-LOK	V-RING	TS-RING		qty		ball	roller
45	1.11/16	1.3/4	SNN510-608	1210K		H210	HA210	HE210	G510	V510	TS510 ^{1,2}	FR90X10.5	2	A510	4.0	
				2210K	22210K	H310	HA310	HE310				FR90X9	2		4.0	4.1
			SNN512-610	1310K	21310K	H310	HA310	HE310	G610	V610	TS610 ^{1,2}	FR110X10.5	2	A512	7.0	7.0
				2310K	22310K	H2310	HA2310	HE2310				FR110X8	1		7.4	7.6
50	1.15/16	2	SNN511-609	1211K		H211	HA211	HE211	G511	V511	TS511 ^{1,2}	FR100X11.5	2	A511	5.9	
				2211K	22211K	H311	HA311	HE311				FR100X9.5	2		6.0	6.1
			SNN513-611	1311K	21311K	H311	HA311	HE311	G611	V611	TS611 ^{1,2}	FR120X11	2	A513	8.6	8.6
				2311K	22311K	H2311	HA2311	HE2311				FR120X8	1		9.1	9.4
55			SNN512-610	1212K		H212			G512	V512	TS512	FR110X13	2	A512	6.8	
				2212K	22212K	H312						FR110X10	2		6.9	7.1
			SNN515-612	1312K	21312K	H312			G612	V612	TS612	FR130X12.5	2	A515	9.4	9.4
				2312K	22312K	H2312						FR130X10	1		9.9	10.3
60	2.3/16	2.1/4	SNN513-611	1213K		H213	HA213	HE213	G513 ¹	V513 ¹	TS513 ^{1,2}	FR120X14	2	A513	8.3	
				2213K	22213K	H313	HA313	HE313				FR120X10	2		8.6	8.7
			SNN516-613	1313K	21313K	H313	HA313	HE313	G613 ¹	V613 ¹	TS613 ^{1,2}	FR140X12.5	2	A516	13.4	13.3
				2313K	22313K	H2313	HA2313	HE2313				FR140X10	1		14.0	14.4
65	2.7/16	2.1/2	SNN515-612	1215K		H215	HA215	HE215	G515	V515	TS515 ^{1,2}	FR130X15.5	2	A515	9.1	
				2215K	22215K	H315	HA315	HE315				FR130X12.5	2		9.4	9.5
			SNN518-615	1315K	21315K	H315	HA315	HE315	G615	V615	TS615 ^{1,2}	FR160X14	2	A518	17.5	
				2315K	22315K	H2315	HA2315	HE2315				FR160X10	1		18.9	19.4

¹ add suffix A for shaft diameter "in1"
² add suffix E for shaft diameter "in2"