

**FAG****11209-TVH**

Self-aligning ball bearing

Self-aligning ball bearing 112...-TVH, plastic cage

Technical information

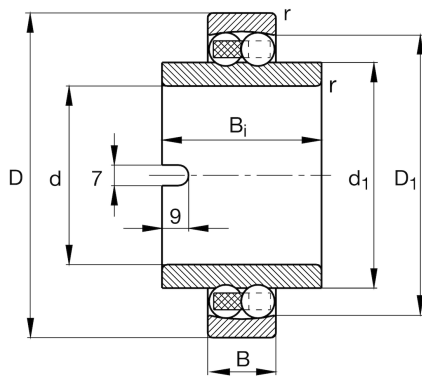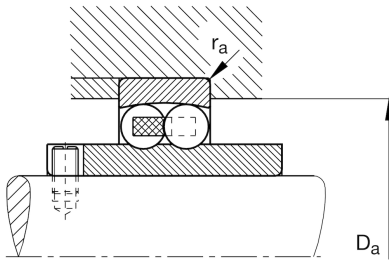

Main Dimensions & Performance Data

d	45 mm	Bore diameter
D	85 mm	Outside diameter
B	19 mm	Width, outer ring
B _i	58 mm	Width, inner ring
C _r	22.000 N	Basic dynamic load rating, radial
C _{0r}	7.300 N	Basic static load rating, radial
C _{ur}	465 N	Fatigue load limit, radial
n _G	9.300 1/min	Limiting speed
n _{gr}	8.200 1/min	Reference speed
≈m	0,788 kg	Weight

Mounting dimensions

D _{a max}	78 mm	Maximum diameter of housing shoulder
r _{a max}	1 mm	Maximaler Hohlkehlradius

Dimensions

r _{min}	1,1 mm	Minimum chamfer dimension
D ₁	72,11 mm	Shoulder diameter outer ring
d ₁	57,7 mm	Shoulder diameter inner ring
b	7 mm	Width retaining slot
t	9 mm	Hight retaining slot

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.



[View product details on medias](#)

13.11.2024, 12:38:20 IST

Calculation factors

e	0,21	Limiting value of Fa/Fr for the applicability of diff. Values of factors X and Y
Y ₁	3,03	Dynamic axial load factor
Y ₂	4,68	Dynamic axial load factor
Y ₀	3,17	Static axial load factor