

Series **XT661**
ø20, ø40, ø60, ø80, ø100

How to Order

XT661-4A-R

Outer body diameter

2A	20 mm
4A	40 mm
6A	60 mm
8A	80 mm
10A	100 mm

Direction of whirling air

R	Clockwise
L	Counterclockwise


Specifications

Outer body diameter (mm)	20	40	60	80	100
Piping port size	M5 x 0.8			Rc1/8	
Fluid	Air*				
Operating pressure	0.01 to 0.5 MPa				
Proof pressure	0.75 MPa				
Ambient and operating temperature	−5 to 60°C (with no condensation)				
Grease	Grease-free				


* Air purification rating: JIS B 8392-1 (ISO8573-1) Quality Degree 4, 4, 2

Dimensions

XT661-2A-R (L)

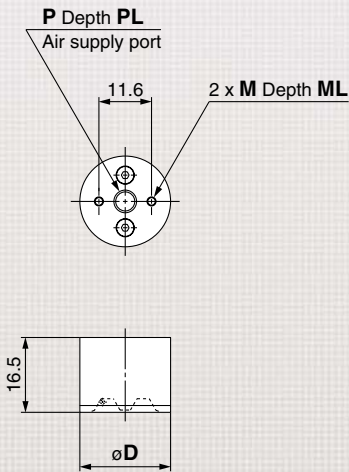

XT661-□-R (L)

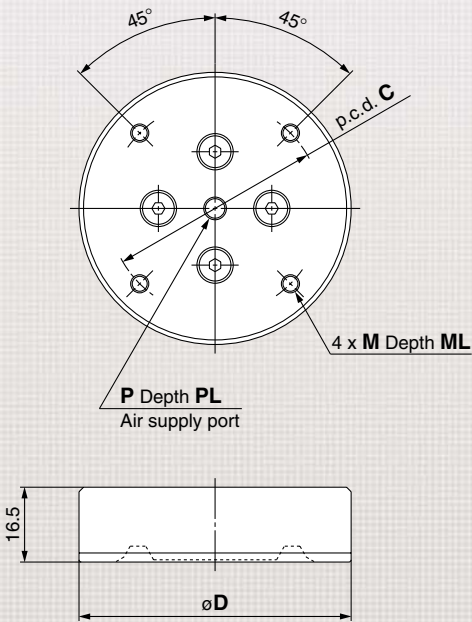

Model	P	PL	M	ML	C	D
XT661-2A-R (L)	M5 x 0.8	5	M2 x 0.4	3.2	—	20
XT661-4A-R (L)	M5 x 0.8	5	M4 x 0.7	5	32.8	40
XT661-6A-R (L)	M5 x 0.8	5	M4 x 0.7	5	47	60
XT661-8A-R (L)	Rc1/8	—	M4 x 0.7	5	47	80
XT661-10A-R (L)	Rc1/8	—	M4 x 0.7	5	47	100