


3. How to order

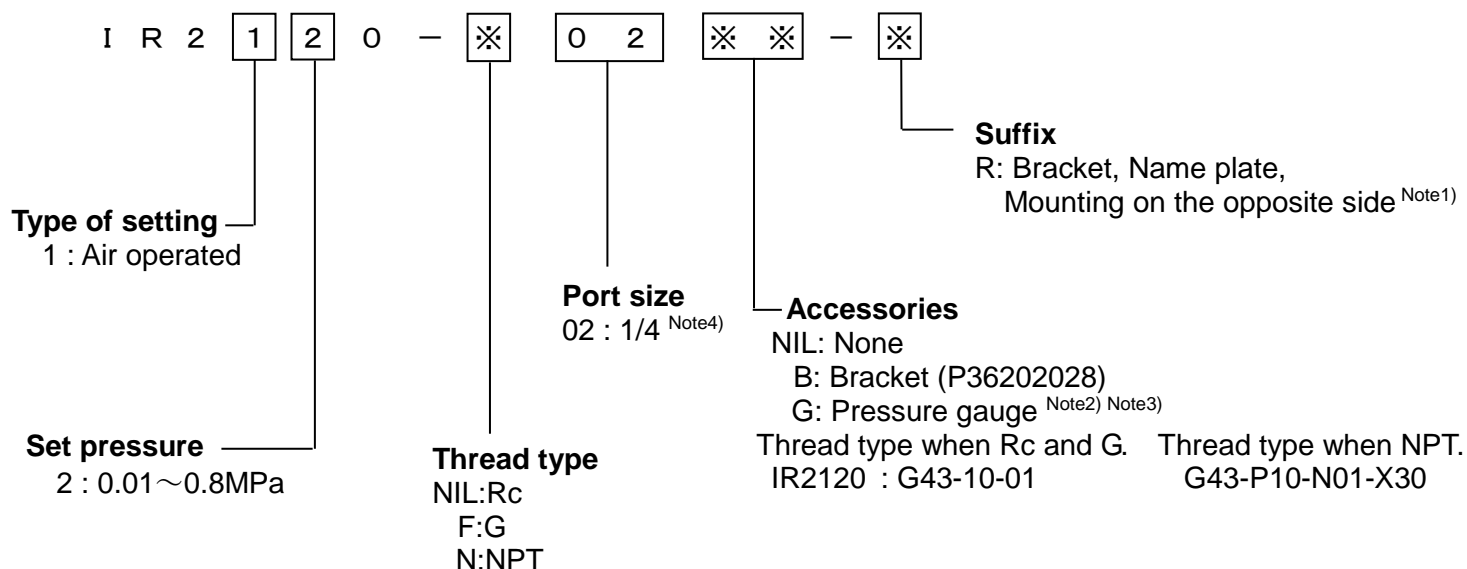

(Note 1) In the standard mounting position, the product name plate is attached to the front and the bracket is mounted to the back when viewed with the SUP side on the left and OUT side on the right.


(Note 2) Accuracy: $\pm 3\%$ F.S.(full span)
Accuracy guarantee temperature range : $23\pm 5^{\circ}\text{C}$

(Note 3) The pressure gauge is not attached and becomes bundled shipment.

(Note 4) One type only.

4. Marking on product

- Product name plate

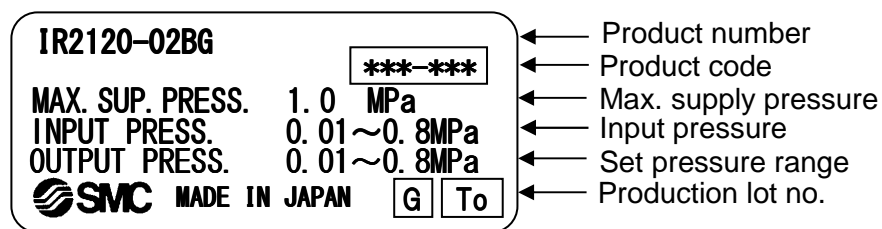

Production lot no.

