


Technical datasheet

BK2220

Drawn cup needle roller bearings, closed end

Needle roller bearing, drawn cup, closed end

Visual(s)

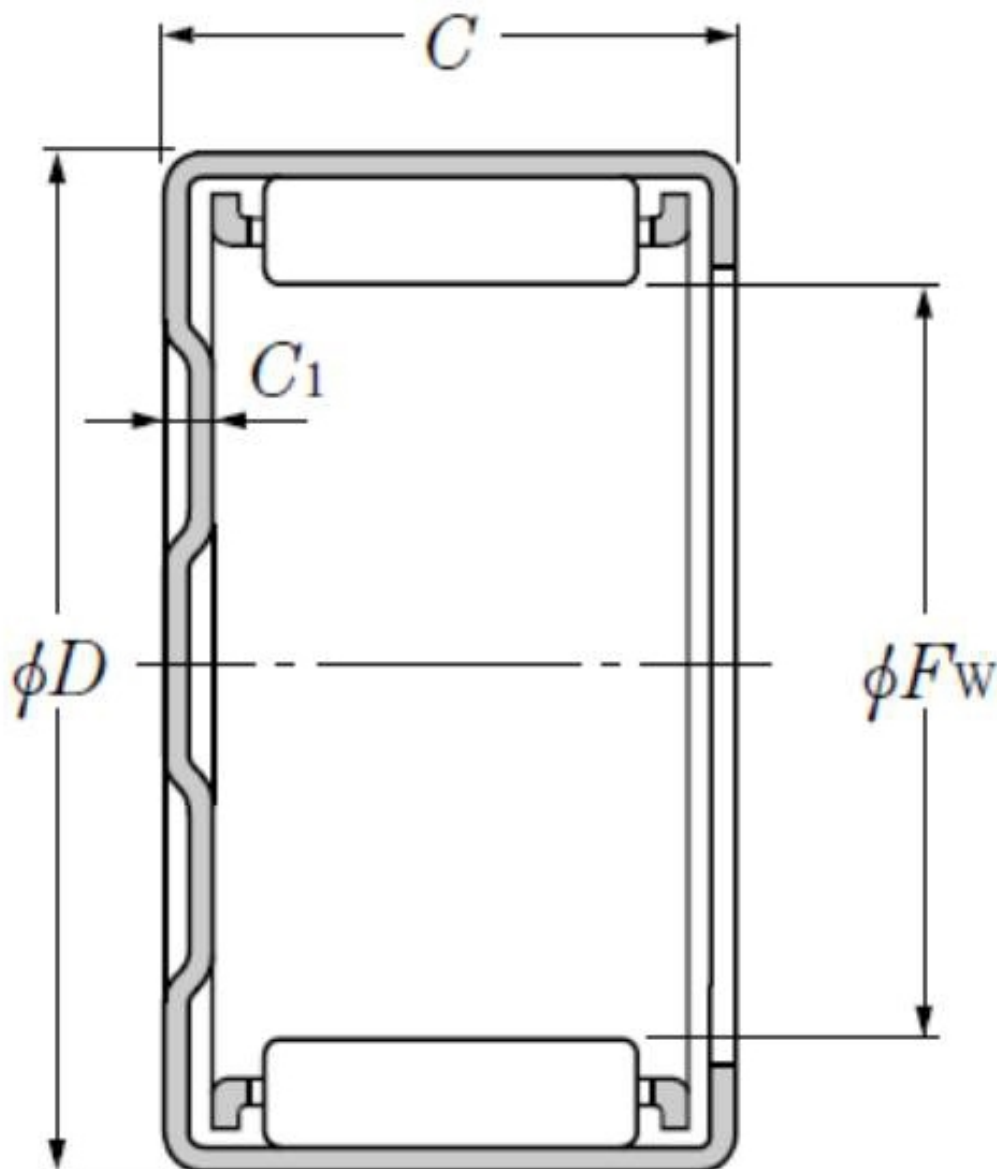

Product definition	
Fw	22 mm
D	28 mm
C	20 mm
C1	2.7 mm
Dw	2 mm
Lw	15.8 mm
Lubrication hole on outer ring	Non/No
Inner ring reference	IR17X22X20.5
Mass	0.03 kg

Product performance	
Cr	17.2 kN
C0r	29.8 kN
Nlim (grease)	7,500 rpm
Nlim (oil)	11,000 rpm
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.46 Hz
Characteristic rolling element frequency, BSF	11.92 Hz
Characteristic outer ring frequency, BPF0	11 Hz
Characteristic inner ring frequency, BPF1	13 Hz