


## WE-R Male stud elbow

EO 24° cone end / Male BSPP thread – metal sealing edge (ISO 1179)

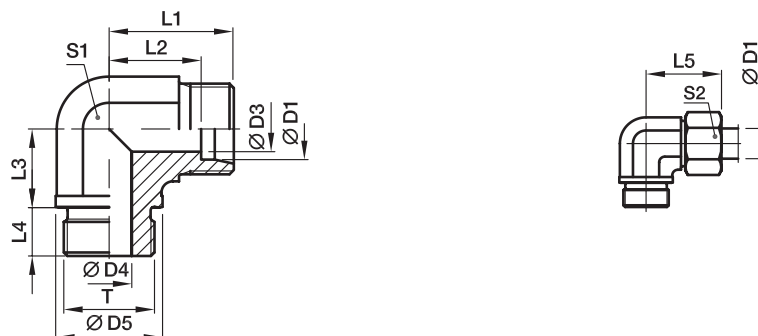

| Series          | D1 | T         | D3 | D4 | D5 | L1 | L2   | L3 | L4 | L5 | S1 | S2 | Weight<br>g/1 piece | Order code* | PN (bar) <sup>1)</sup> |     |     |
|-----------------|----|-----------|----|----|----|----|------|----|----|----|----|----|---------------------|-------------|------------------------|-----|-----|
|                 |    |           |    |    |    |    |      |    |    |    |    |    |                     |             | Steel                  | 71  | MS  |
| L <sup>3)</sup> | 22 | G 3/4 A   | 19 | 18 | 32 | 35 | 27.5 | 26 | 16 | 44 | 27 | 36 | 168                 | WE22LR      | 160                    | 160 | 100 |
|                 | 28 | G 1 A     | 24 | 23 | 39 | 38 | 30.5 | 30 | 18 | 47 | 36 | 41 | 305                 | WE28LR      | 160                    | 160 | 100 |
|                 | 35 | G 1 1/4 A | 30 | 30 | 49 | 45 | 34.5 | 34 | 20 | 56 | 41 | 50 | 465                 | WE35LR      | 160                    | 160 | 100 |
|                 | 42 | G 1 1/2 A | 36 | 36 | 55 | 51 | 40.0 | 39 | 22 | 63 | 50 | 60 | 706                 | WE42LR      | 160                    | 160 | 100 |
| S <sup>4)</sup> | 20 | G 3/4 A   | 16 | 16 | 32 | 37 | 26.5 | 26 | 16 | 48 | 27 | 36 | 210                 | WE20SR      | 400                    | 400 | 250 |
|                 | 25 | G 1 A     | 20 | 20 | 39 | 42 | 30.0 | 30 | 18 | 54 | 36 | 46 | 388                 | WE25SR      | 250                    | 250 | 160 |
|                 | 30 | G 1 1/4 A | 25 | 25 | 49 | 49 | 35.5 | 34 | 20 | 62 | 41 | 50 | 630                 | WE30SR      | 160                    | 160 | 100 |
|                 | 38 | G 1 1/2 A | 32 | 32 | 55 | 57 | 41.0 | 39 | 22 | 72 | 50 | 60 | 888                 | WE38SR      | 160                    | 160 | 100 |

<sup>1)</sup> Pressure shown = item deliverable<sup>3)</sup> L = light series; <sup>4)</sup> S = heavy series
$$\frac{\text{PN (bar)}}{10} = \text{PN (MPa)}$$

Delivery without nut and ring. Information on ordering complete fittings see page I7.

\*Please add the **suffixes** below according to the material/surface required.

| Order code suffixes |                             |           |
|---------------------|-----------------------------|-----------|
| Material            | Suffix surface and material | Example   |
| Steel               | CFX                         | WE20SRCFX |
| Stainless Steel     | 71X                         | WE20SR71X |
| Brass               | MSX                         | WE20SRMSX |