



Technical data

UCP324


Bearing units

Grey cast housing, radial insert ball bearing with socket set screws, seal with slinger

KIT CONTENT

UC324G2, P324

VISUAL (S)

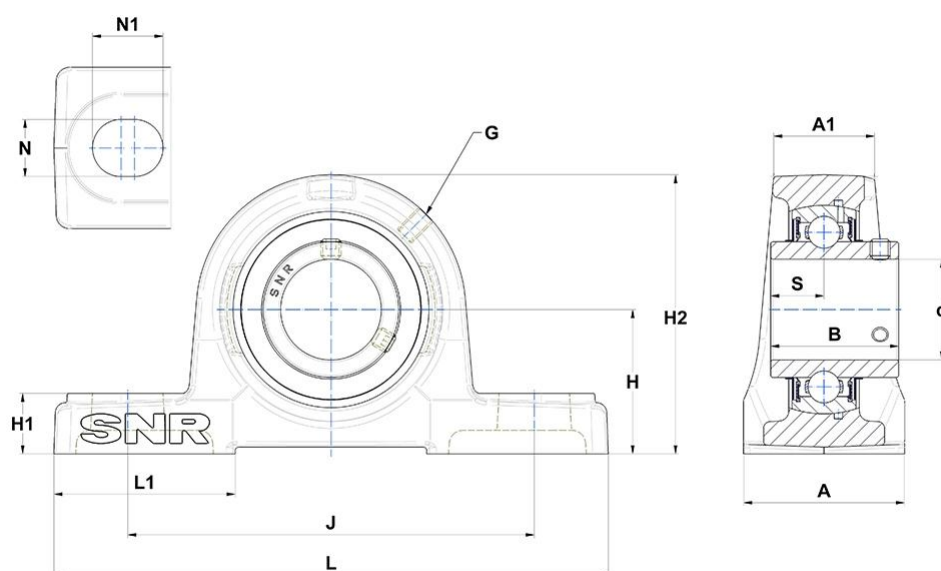

PRODUCT DEFINITION

A - Housing width	140 mm
A1 - Housing top width	88 mm
B - Width of Inner Ring	126 mm
d - Shaft diameter	120 mm
G - Grease fitting	M10x1
H - Distance mounting base to centerline spheric. seating diam.	160 mm

PRODUCT DEFINITION

H1 - Housing foot height	65 mm
H2 - Housing height	320 mm
J - Mounting holes distance	450 mm
L - Housing length	570 mm
L1 - Housing foot length	140 mm
N - Mounting hole dimension	40 mm
N1 - Mounting hole length	55 mm
S - Dist. cent. of raceway to face IR on side opp. lock. device	51 mm
Brand	SNR

PRODUCT PERFORMANCE

C - Dynamic load rating	228 kN
C0 - Static load rating	208 kN
Operating temperature min.	-20 °C
Operating temperature max.	100 °C

OTHER FEATURES

Mass	58,5 kg
Recommended tightening torque for set screw	75 N-m