


Data sheet



Light / PIR Presence Detectors

PDRS1500 – 360° Ceiling PIR Presence Detector, Surface Mount

Product Image & Line Diagram

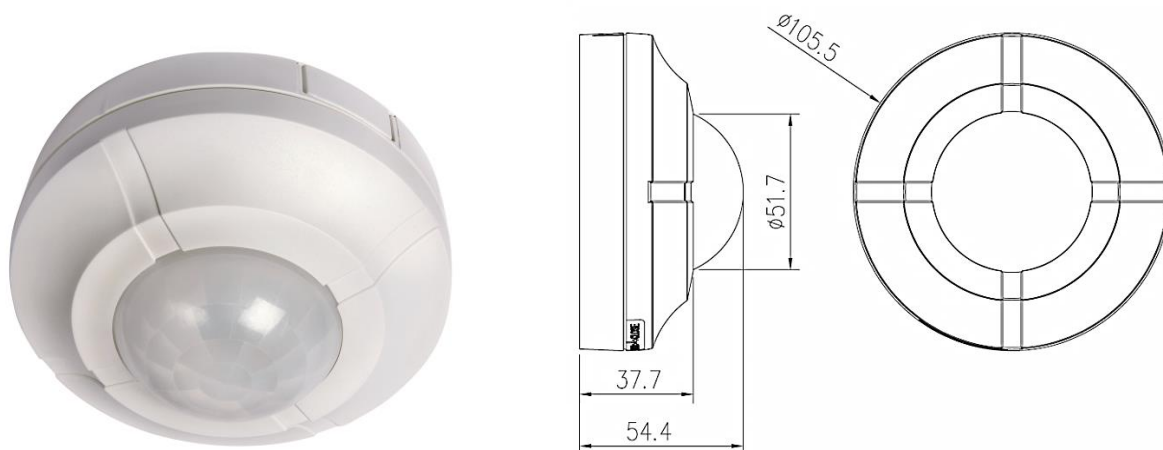

Technical Data

General	
Operating Voltage	230V AC
Frequency	50Hz
Installation Type	Surface or flush
Min Depth of Wall Box	16mm, Single gang back box or pattress
Class Protection	Class 2
Number of Channels	1
Weatherproof Rating	IP55
Accessories (Included)	Instructions, Fittings, Cable clamps, Wiring cover
Switch Rating	1500W Filament/Incandescent/Fluorescent/Low Energy, 420W LED, 250W Fan
Accessories (Optional)	None
Dimensions	Height 105.5mm, Width 105.5mm, Depth 54.4mm
Weight	102g
EAN	5012483013120
Designed In Accordance To	BS EN 60669-2-1 Includes updates & amendments.
Guarantee Period	3 Years
PIR Sensor	
Detection Angle	360°
Light ON Time	1 to 30 minutes, User adjustable
Slave Terminal	Yes
Detection Range	10 meters, Fixed
Permanent ON Facility	Yes, Pulse
Dusk Until Dawn Mode	No
Lux Level	5 – 1000, User adjustable
Construction;	
PIR	Polycarbonate



A theben Group Company

Article Number: PDRS1500 DS210717V2



Timeguard Ltd reserves the right to withdraw, improve or modify any design without prior notification. Timeguard Ltd cannot be held responsible for the incorrect application of any product.
Additional information can be found at: www.timeguard.com