




Technical datasheet

NJ232

Single row cylindrical roller bearings

Single row cylindrical roller bearing, single direction for axial loads, separable, brass cage.

Visual(s)

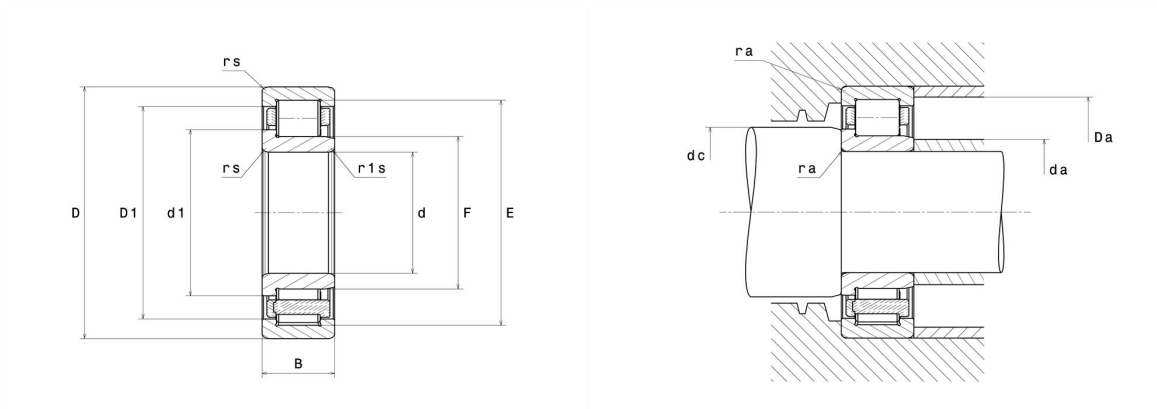

Product definition

d	160 mm
D	290 mm
B	48 mm
E	255 mm
F	195 mm
d1	207 mm
rs min	3 mm
r1s min	3 mm
Radial clearance class	CN
Mass (without HJ ring)	13.7 kg
Brand	NTN

Product performance

Dynamic load, C	430 kN
Static load, C0	570 kN
Fatigue limit load, Cu	54.5 kN
Nlim (oil)	2,700 rpm
Nlim (grease)	2,300 rpm
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.43 Hz
Characteristic rolling element frequency, BSF	7.37 Hz
Characteristic outer ring frequency, BPF0	7.8 Hz
Characteristic inner ring frequency, BPFI	10.2 Hz

Abutment dimensions

da min	173 mm
da max	192 mm
dc min	210 mm
Da max	277 mm
ra max	2.5 mm

Calculation factors

Equivalent dynamic radial load

$$P = Fr$$

Equivalent static radial load

$$Po = Fr$$