

ATP - PROTWIST® SCREWDRIVERS FOR PHILLIPS® SCREWS - ROUND BLADES




Standards :

NF ISO 8764-1, NF ISO 8764-2, ISO 8764-1, ISO 8764-2, DIN ISO 8764-1, DIN ISO 8764-2, ASME B107.600

Description :

- Extra-long blade up to 400 mm for difficult and remote access.
- Inline Hardening Process – +50% Tip Life and +100% Bar Strength.
- Handle Material - Softer for more Comfort and still Chemical Resistant.
- Blade " tri-coating " treatment (Zinc-Nickel-Chromium) - 4x Corrosion Resistance.
- Handle 'Channel' - +10% Torque.
- Laser Marking - gives virtually Permanent Marking.
- CNC tip machining - gives better Screw Fit increasing Torque Transfer and Reducing Wear.

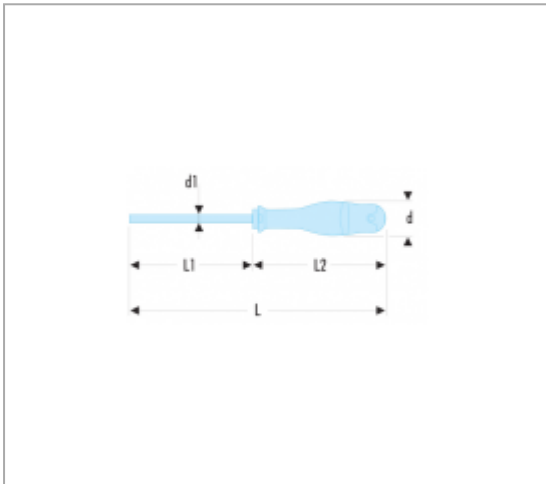

References :

	D [MM]	D1 X L1 [MM]	L [MM]	L2 [MM]	PHILLIPS [NO]	[G]
ATP1X75	30	4,5 x 75	184	109	PH1	73
ATP1X250	30	4,5 x 250	359	109	PH1	99
ATP2X100	36	6,0 x 100	220	120	PH2	120
ATP2X250	36	6,0 x 250	370	120	PH2	153
ATP2X400	36	6,0 x 400	520	120	PH2	186
ATP3X150	40	8,0 x 150	275	125	PH3	194
ATP4X200	40	10,0 x 200	325	125	PH4	277

	D [MM]	D1 X L1 [MM]	L [MM]	L2 [MM]	PHILLIPS [NO]	[G]
ATP0X75	25	3,0 x 75	178	103	PH0	45
ATP1X100	30	4,5 x 100	209	109	PH1	76
ATP2X125	36	6,0 x 125	245	120	PH2	126