

# Magnetically Coupled Rodless Cylinder Slider Type: Slide Bearing

## Series CY1S

ø6, ø10, ø15, ø20, ø25, ø32, ø40

### How to Order

**CY1S 25 H - 300 -**

**With auto switch** **CDY1S 25 H - 300 - J79W -**

With switch rail

Slider type (Slide bearing)

Bore size

6	6 mm	25	25 mm
10	10 mm	32	32 mm
15	15 mm	40	40 mm
20	20 mm		

Port thread type

Symbol	Type	Bore size
Nil	M thread	ø6, ø10, ø15
	Rc	ø20, ø25, ø32, ø40
TN	NPT	
TF	G	

Magnetic holding force  
Refer to page 1195 for specifications.

Standard stroke  
Refer to "Standard Stroke" on page 1195.

Made to Order  
Refer to page 1195 for details.

Number of auto switches

Nil	2 pcs.
S	1 pc.
n	"n" pcs.

Auto switch

Nil	Without auto switch (Built-in magnet)
-----	---------------------------------------

\* For the applicable auto switch model, refer to the table below.

Adjustment type

Nil	With adjusting bolt
B	With shock absorbers (2 pcs.)
BS	With shock absorber (With plate A) * Installed on Side A at time of shipment.

### Applicable Auto Switch/Refer to pages 1263 to 1371 for further information on auto switches.

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage			Auto switch model		Lead wire length (m) *				Pre-wired connector	Applicable load	
					DC	AC	Electrical entry direction		0.5 (Nil)	3 (L)	5 (Z)	None (N)				
							Perpendicular	In-line								
Solid state switch	—	Grommet	Yes	3-wire (NPN)	5 V, 12 V	—	F7NV	F79	●	●	○	—	○	IC circuit	Relay, PLC	
		3-wire (PNP)		F7PV			F7P	●	●	○	—	○				
	Connector	2-wire		12 V	F7BV		J79	●	●	○	—	○	—			
		—		—	J79C		—	●	●	●	—	—				
	Diagnostic indication (2-color indication)	Grommet		3-wire (NPN)	5 V, 12 V		F7NWV	F79W	●	●	○	—	○	IC circuit		
				3-wire (PNP)	—		F7PW	●	●	○	—	○				
	Water resistant (2-color indication)	Grommet		2-wire	12 V		F7BWV	J79W	●	●	○	—	○	—		
				—	—		F7BAV	F7BA	—	●	○	—	○			
With diagnostic output (2-color indication)	Grommet	4-wire (NPN)	5 V, 12 V	—	F79F	●	●	○	—	○	IC circuit					
Reed switch	—	Grommet	Yes	3-wire (NPN equivalent)	—	5 V	—	—	A76H	●	●	—	—	—	IC circuit	Relay, PLC
				2-wire	—	—	200 V	A72	A72H	●	●	—	—	—	—	
					12 V	100 V	A73	A73H	●	●	●	—	—	—		
		5 V, 12 V			100 V or less	A80	A80H	●	●	—	—	—	—	IC circuit		
		12 V			—	A73C	—	●	●	●	●	—	—	—		
		Connector		5 V, 12 V	—	A80C	—	●	●	●	●	—	—	IC circuit		
				—	—	—	—	—	—	—	—	—	—	—		

\* Lead wire length symbols: 0.5 m..... Nil  
3 m..... L  
5 m..... Z  
None..... N

(Example) J79W  
(Example) J79WL  
(Example) J79WZ  
(Example) J79CN

\* Solid state auto switches marked with "○" are produced upon receipt of order.

- Since there are other applicable auto switches than listed, refer to page 1199 for details.
- For details about auto switches with pre-wired connector, refer to pages 1328 and 1329.
- \* Auto switches are shipped together, (but not assembled).


# Magnetically Coupled Rodless Cylinder Slider Type: Slide Bearing **Series CY1S**



**Made to Order Specifications**  
(For details, refer to pages 1395 to 1565.)

Symbol	Specifications
—XB9	Low speed cylinder (15 to 50 mm/s)
—XB13	Low speed cylinder (7 to 50 mm/s)
—X116	Hydro specifications rodless cylinder
—X168	Helical insert thread specifications
—X210	Non-lubricated exterior specifications
—X322	Outside of cylinder tube with hard chrome plated
—X324	Non-lubricated exterior specifications (With dust seal)
—X431	Auto switch rails on both side faces (with 2 pcs.)

## Amount of Adjustment for Adjusting Bolt and Shock Absorber

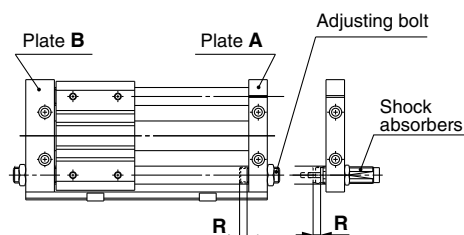

Bore size (mm)	R	Amount of adjustment by adjusting bolt (both ends: R x 2) (mm)
6	0 to 6	12
10	0 to 5.5	11
15	0 to 3.5	7
20	0 to 5.5	11
25	0 to 5	10
32	0 to 5.5	11
40	0 to 4.5	9

Bore size (mm)	Amount of adjustment by shock absorber: R (mm)	
	Plate A side	Plate B side
6	17	11
10	14	6
15	14	4
20	16	7
25	32	23
32	33	23
40	32	17

\* Since the cylinder is in an intermediate stop condition when stroke adjustment is performed, use caution regarding the operating pressure and the kinetic energy of the load.

\* The amount of adjustment for adjustment bolts is the total amount when adjusted on both plate ends. For the adjustment on a single plate end, the amount of adjustment is half of the figures in the table above.

\* The Plate A: Piping port side

## Specifications

Bore size (mm)		6	10	15	20	25	32	40
Fluid		Air						
Proof pressure		1.05 MPa						
Maximum operating pressure		0.7 MPa						
Minimum operating pressure		0.18 MPa						
Ambient and fluid temperature		−10 to 60°C						
Piston speed *		50 to 400 mm/s						
Cushion		Rubber bumper / Shock absorbers						
Lubrication		Non-lube						
Stroke length tolerance		0 to 250 st: $+1.0_0$ , 251 to 1000 st: $+1.4_0$ , 1001 st and up: $+1.8_0$						
Holding force	Type H	19.6	53.9	137	231	363	588	922
	Type L	—	—	81.4	154	221	358	569

\* In the case of setting an auto switch (CDY1S) at the intermediate position, the maximum piston speed is subject to restrict for detection upon the response time of a load (Relays, Sequence controller, etc.)

## Standard Stroke

Bore size (mm)	Standard stroke (mm)	Maximum manufacturable stroke (mm)
6	50, 100, 150, 200	300
10	50, 100, 150, 200, 250, 300	500
15	50, 100, 150, 200, 250, 300, 350 400, 450, 500	750
20	100, 150, 200, 250, 300, 350 400, 450, 500, 600, 700, 800	1000
25		1500
32		1500
40	100, 150, 200, 250, 300, 350 400, 450, 500, 600, 700, 800 900, 1000	1500

Note) Intermediate stroke is available by the 1 mm interval.

## Mass

		(kg)						
		Bore size (mm)						
Number of magnets		6	10	15	20	25	32	40
Basic mass	CY1S□H	0.27	0.48	0.91	1.48	1.84	3.63	4.02
	CY1S□L	—	—	0.85	1.37	1.75	3.48	3.84
Additional mass per each 50 mm of stroke		0.044	0.074	0.104	0.138	0.172	0.267	0.406

Calculation

(Example) CY1S32H-500

• Basic mass ..... 3.63 kg • Additional mass ..... 0.267/50 st

• Cylinder stroke ..... 500 st  $3.63 + 0.267 \times 500 \div 50 = 6.3$  kg

## Shock Absorber Specifications

Refer to the Series RB in Best Pneumatics No. 3 for the details on shock absorbers.

Applicable rodless cylinder		CY1S <sup>6</sup> <sub>10</sub> <sup>15</sup>	CY1S20	CY1S25	CY1S <sup>32</sup> <sub>40</sub>
Shock absorber model		RB0805	RB1006	RB1411	RB2015
Maximum energy absorption: (J)		0.98	3.92	14.7	58.8
Stroke absorption: (mm)		5	6	11	15
Collision speed: (m/s)		0.05 to 5			
Max. operating frequency: (cycle/min) *		80	70	45	25
Ambient temperature range		-10 to 80 °C			
Spring force: (N)	Extended	1.96	4.22	6.86	8.34
	Retracted	3.83	6.18	15.3	20.50

\* It denotes the values at the maximum energy absorption per one cycle. Therefore, the operating frequency can be increased according to the energy absorption.

The shock absorber service life is different from that of the CY1S cylinder. Refer to the Specific Product Precautions for the replacement period.