


Round plug connector, Series CON-RD

- open cable ends
- with cable
- unshielded



Ambient temperature min./max.	-25 ... 70 °C
Operational voltage	48 V AC/DC
Protection class	IP65
Wire cross-section	0,25 mm ²
Weight	See table below



Technical data

Part No.	Electrical connection	Max. current	Number of wires	Cable-Ø	Cable length
	1				
1834484083	Socket Snap Ø8 3-pin straight 180°	4 A	3	4,5 mm	5 m
1834484085	Socket Snap Ø8 3-pin angled 90°	4 A	3	4,5 mm	5 m
1834484199	Socket Snap Ø8 3-pin angled 90°	4 A	3	4,5 mm	10 m

Part No.	Certification	Weight	Fig.
1834484083	-	0,137 kg	Fig. 1
1834484085	UL (Underwriters Laboratories)	0,138 kg	Fig. 2
1834484199	-	0,274 kg	Fig. 2

Technical information


The specified protection class is only valid in assembled and tested state.

Technical information

Material	
Housing	Polyurethane
Cable sheath	Polyurethane


Dimensions

Fig. 1

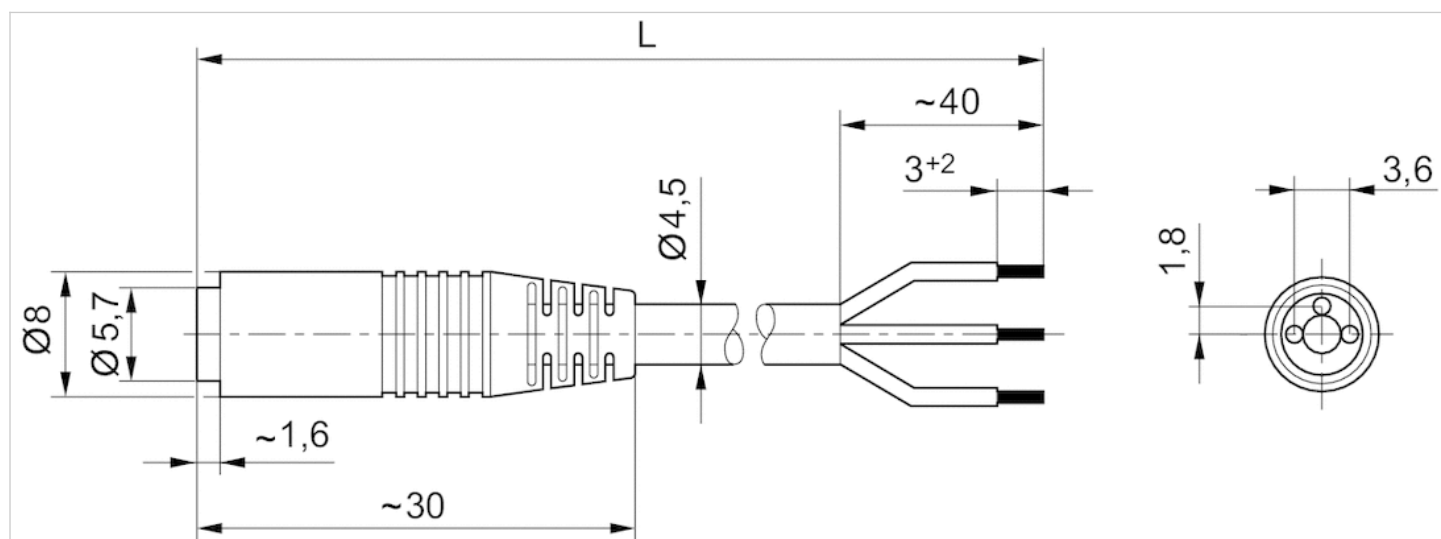

L = length


Fig. 2

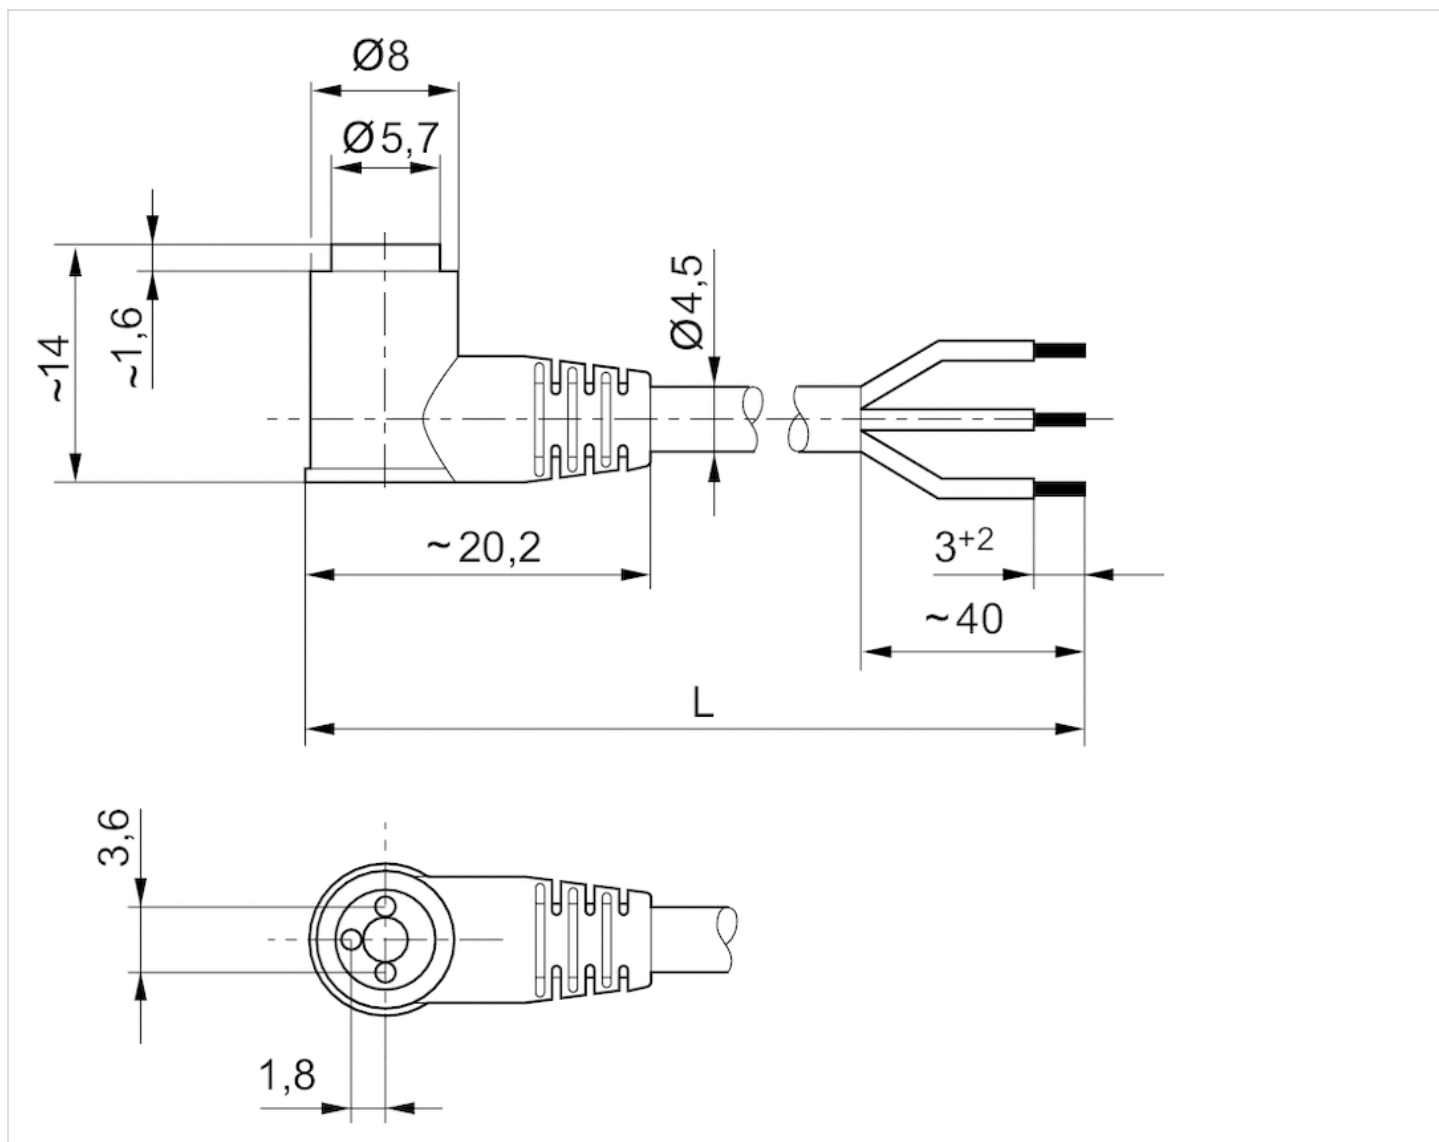

L = length

Pin assignments

Pin assignment, socket



- (1) BN=brown
- (3) BU=blue
- (4) BK=black