



**The Timken Company**

4500 Mt Pleasant St. NW


N. Canton, OH 44720

**Phone:** (234) 262-3000

**E-Mail:** [CustomerCAD@timken.com](mailto:CustomerCAD@timken.com) • **Web site:** [www.timken.com](http://www.timken.com)

## Part Number 526, Tapered Roller Bearings - Single Cones - Imperial

This is the most basic and most widely used type of tapered roller bearing. It consists of two main separable parts: the cone (inner ring) assembly and the cup (outer ring). It is typically mounted in opposing pairs on a shaft.

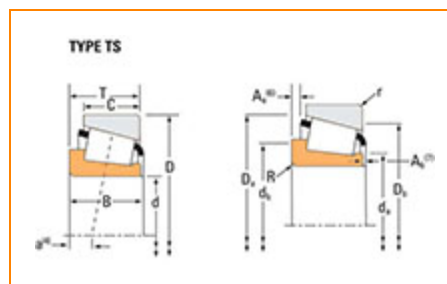

[Specifications](#) | [Dimensions](#) | [Abutment and Fillet Dimensions](#) | [Basic Load Ratings](#) | [Factors](#)

### Specifications

<b>Series</b>	525
<b>Cone Part Number</b>	526
<b>Design Units</b>	Imperial
<b>Cage Type</b>	Stamped Steel
<b>C1 - Dynamic Radial Rating (Two-Row, 1 million revolutions)<sup>1</sup></b>	64400 lbf 287000 N
<b>C90(2) - Dynamic Radial Rating (Two-Row, 90 million revolutions)<sup>2</sup></b>	16700 lbf 74300 N



Dimensions

<b>d - Cone Bore</b>	1 5/8 in 41.275 mm
----------------------	-----------------------

<b>B - Cone Width</b>	1.4200 in 36.068 mm
-----------------------	------------------------

## Abutment and Fillet Dimensions

<b>R - Cone Backface "To Clear" Radius<sup>3</sup></b>	0.140 in 3.6 mm
--	--------------------

<b>da - Cone Frontface Backing Diameter</b>	1.97 in 50 mm
---	------------------

<b>db - Cone Backface Backing Diameter</b>	2.24 in 57 mm
--	------------------

<b>Ab - Cage-Cone Frontface Clearance</b>	0.1 in 2.5 mm
---	------------------

<b>Aa - Cage-Cone Backface Clearance</b>	0.09 in 2.3 mm
--	-------------------

<b>a - Effective Center Location<sup>4</sup></b>	-0.5 in -12.7 mm
--	---------------------

## Basic Load Ratings

<b>C90 - Dynamic Radial Rating (90 million revolutions)<sup>5</sup></b>	9600 lbf 42700 N
---	---------------------

<b>C1 - Dynamic Radial Rating (1 million revolutions)<sup>6</sup></b>	37000 lbf 165000 N
---	-----------------------

<b>C0 - Static Radial Rating</b>	43000 lbf 191000 N
----------------------------------	-----------------------

<b>C<sub>a90</sub> - Dynamic Thrust Rating (90 million revolutions)<sup>7</sup></b>	4690 lbf 20800 N
---	---------------------

## Factors

**K - Factor<sup>8</sup>**

2.05

**Cg - Geometry Factor<sup>9</sup>**

0.0894

<sup>1</sup> Based on  $1 \times 10^6$  revolutions  $L_{10}$  life, for the ISO life calculation method.

<sup>2</sup> Based on  $90 \times 10^6$  revolutions  $L_{10}$  life, for The Timken Company life calculation method.  $C_{90}$  and  $C_{a90}$  are radial and thrust values for a single-row,  $C_{90(2)}$  is the two-row radial value.

<sup>3</sup> These maximum fillet radii will be cleared by the bearing corners.

<sup>4</sup> Negative value indicates effective center inside cone backface.


<sup>5</sup> Based on  $90 \times 10^6$  revolutions  $L_{10}$  life, for The Timken Company life calculation method.  $C_{90}$  and  $C_{a90}$  are radial and thrust values.

<sup>6</sup> Based on  $1 \times 10^6$  revolutions  $L_{10}$  life, for the ISO life calculation method.

<sup>7</sup> Based on  $90 \times 10^6$  revolutions  $L_{10}$  life, for The Timken Company life calculation method.  $C_{90}$  and  $C_{a90}$  are radial and thrust values for a single-row,  $C_{90(2)}$  is the two-row radial value.

<sup>8</sup> These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

<sup>9</sup> Geometry constant for Lubrication Life Adjustment Factor  $a_3$ .

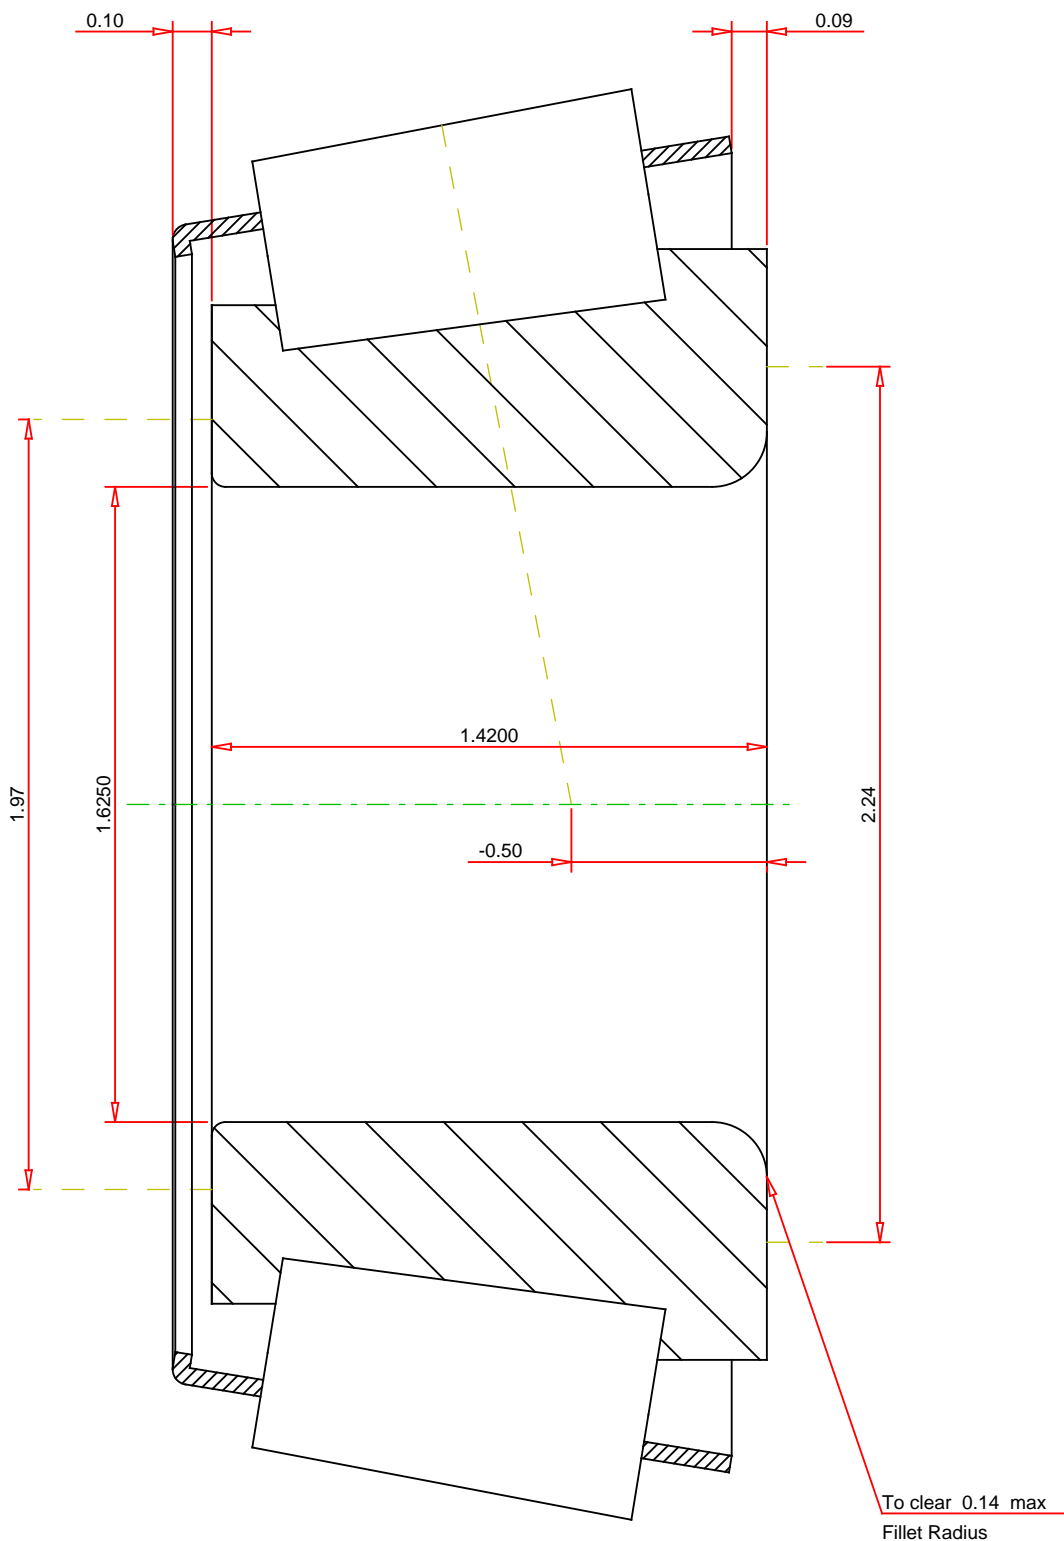

## IMPERIAL UNITS

Number of Rollers Per Row

15

**TIMKEN®**

**THE TIMKEN COMPANY**  
NORTH CANTON, OHIO USA

**526**

Tapered Roller Bearings - Single Cones - Imperial

K Factor	2.05	
Dynamic Radial Rating - C90	9600	lbf
Dynamic Thrust Rating - Ca90	4690	lbf
Dynamic Radial Rating - C1	37000	lbf

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

**FOR DISCUSSION ONLY**