




Technical data

30315U

Single row tapered roller bearings

Tapered roller bearing, pressed steel cage

Visual(s)

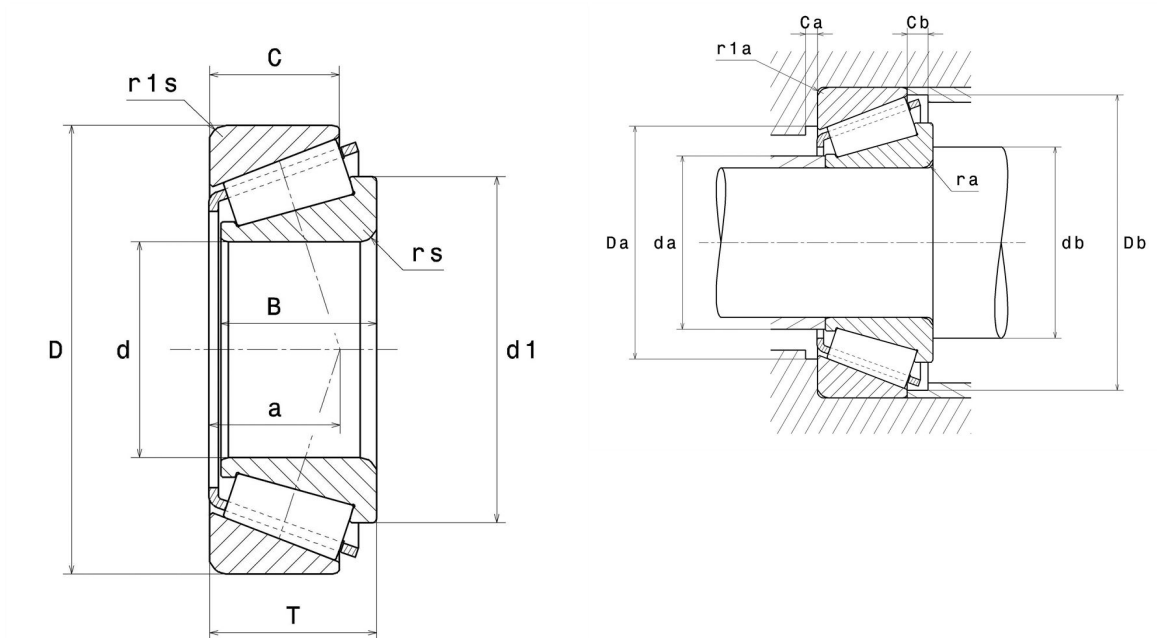

Product definition

d	75 mm
D	160 mm
B	37 mm
C	31 mm
T	40 mm
d1	114.5 mm
a	32 mm
rs min	3 mm
r1s min	2.5 mm
e	0.35
Y2	1.74
Y0	0.96
Mass	3.57 kg
ISO 355 reference	T2GB075
Brand	NTN

Product performance

Dynamic load, C	255 kN
Rating life coefficient, A2	1
Static load, C0	305 kN
Fatigue limit load, Cu	35.2 kN
Nlim (oil)	3,200 Tr/min
Nlim (grease)	2,400 Tr/min
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.41 Hz
Characteristic rolling element frequency, BSF	5.27 Hz
Characteristic outer ring frequency, BPF0	6.57 Hz
Characteristic inner ring frequency, BPFI	9.43 Hz

Abutment dimensions

da max	95 mm
db min	89 mm
Da min	139 mm
Da max	148 mm
Db min	149 mm
Ca min	4 mm
Cb min	9 mm
ra max	2.5 mm
r1a max	2 mm

Calculation factors

Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

$F_a / F_r \leq e$		$F_a / F_r > e$	
X	Y	X	Y
1	0	0.4	Y2

Equivalent static radial load

$$P_0 = X_0.F_r + Y_0.F_a$$

X_0	Y_0
0.5	Y0

If $P_0 < F_r$, then use $P_0 = F_r$

The values for e, Y2 and Y0 are shown in the above table