

Valve plug connector, series CON-VP

- Socket, 2+E, angled, 90°
- EN 175301-803
- unshielded
- with LED Yellow Red



Connection type	Screws
Ambient temperature min./max.	-40 ... 90 °C
Operational voltage	See table below
Protection class	IP65
Mounting screw tightening torque	0,4 Nm
Weight	See table below

Technical data

Part No.		Operational voltage	Protective circuit	Contact assignment	LED status display
1834484101		24 V AC/DC	Z-diode	2+E	Yellow
1834484102		110 V AC	Varistor	2+E	Red
1834484103		230 V AC	Varistor	2+E	Red

Part No.	suitable cable-Ø min./max	Seal	Weight	
1834484101	6 / 8 mm	Silicone caoutchouc	0,03 kg	1)
1834484102	6 / 8 mm	caoutchouc/butadiene caoutchouc	0,03 kg	2)
1834484103	6 / 8 mm	Silicone caoutchouc	0,025 kg	2)

1) Flat gasket

2) Profile seal

Technical information


The specified protection class is only valid in assembled and tested state.

Technical information

Material	
Seals	Silicone caoutchouc caoutchouc/butadiene caoutchouc

Dimensions

Dimensions

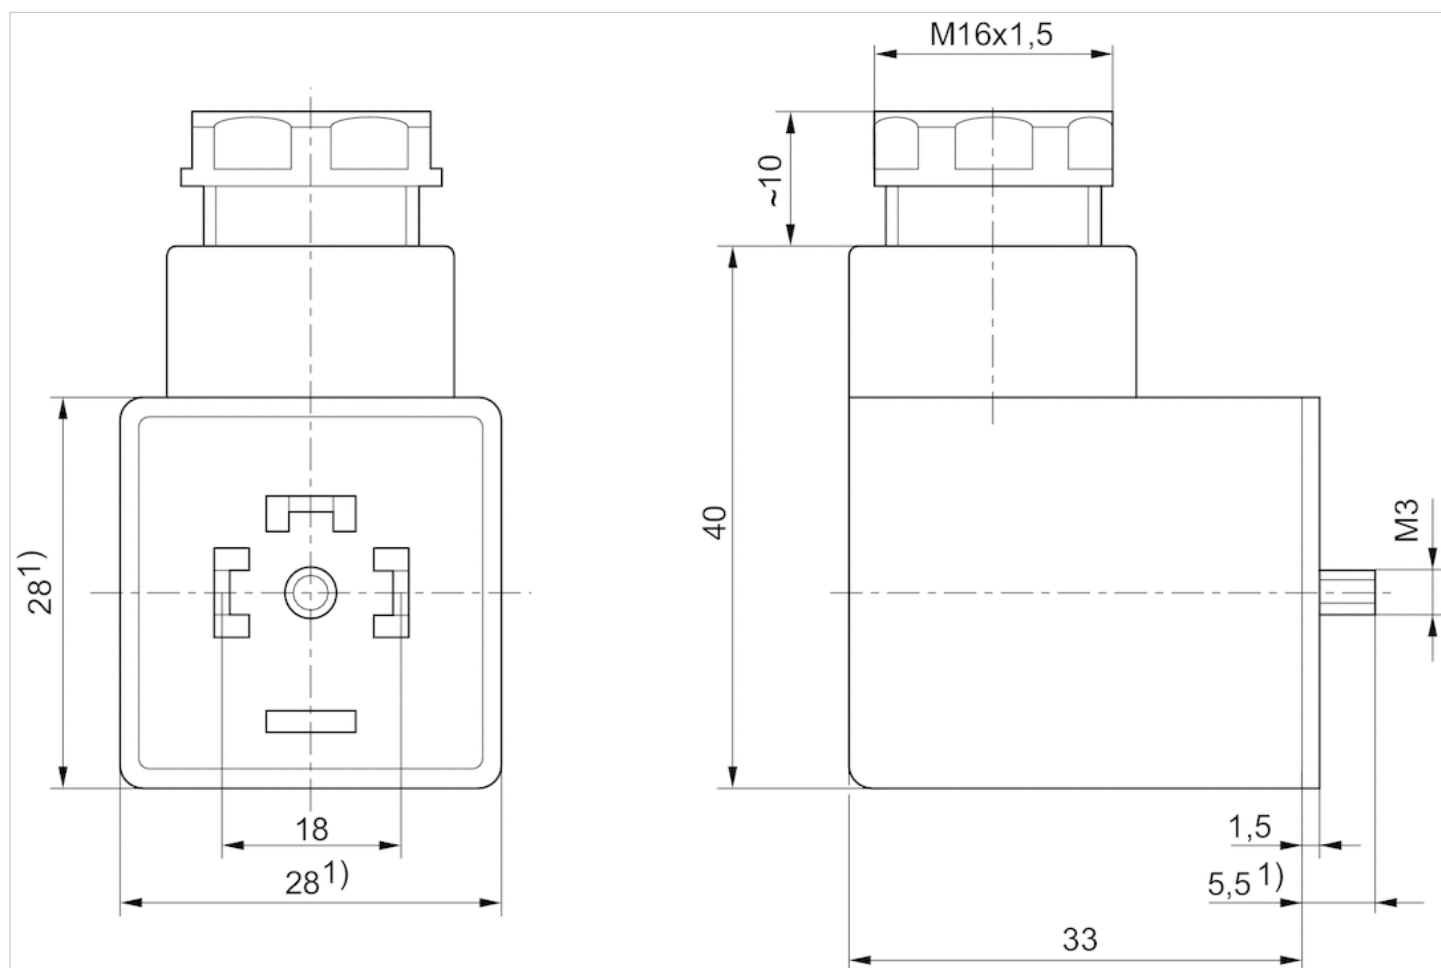

1) Max.