

Soft start valves Series MC

Ports G1/4, G3/8 and G1/2
Modular

3



The Series MC soft start valve is used to avoid damages to people or equipment when pressurising pneumatic systems containing cylinders.

The features of these components allow to pressurise an equipment up to 50% of the indicated pressure, after which 100% is reached rapidly.

The usual location of the soft start valve is after the FRL unit; in fact the modular design allows for perfect adaptability with all Series MC.

A pressure switch can be mounted into the upper part of the unit after removal of the S2610 G1/8 plug.

An electrical or pneumatic 3 way valve should be installed at the bottom of the unit to allow depressurisation.

GENERAL DATA

Construction	modular, compact, poppet type			
Materials	zama, NBR, technopolymer			
Ports	G1/4	G3/8	G1/2	
Weight	Kg	0,275	0,566	0,544
Mounting	in-line wall or panel mounting (in any position)			
Operating temperature	-5°C + 50°C (with the dew point of the fluid lower than 2°C at the min. working temperature)			
Finishing	enamelled			
Operating pressure	2 ÷ 10 bar			
Nominal flow (determined at 6 bar with ΔP1)	G1/4 = 1850 NI/min, G3/8 = 4000 NI/min, G1/2 = 4350 NI/min			


CODING EXAMPLE

MC	2	02	-	AV
----	---	----	---	----

MC	SERIES
2	SIZE: 1 = G1/4 2 = G3/8 - G1/2
02	PORTS: 04 = G1/4 38 = G3/8 02 = G1/2
AV	AV = SOFT START VALVE

Soft start valve Series MC


X = time regulation

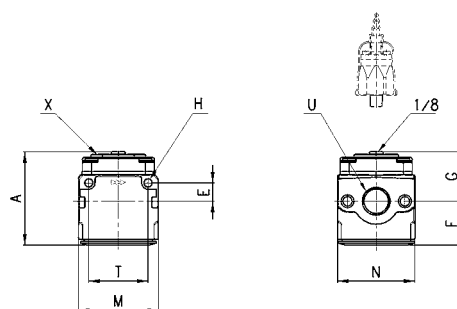


DIMENSIONS

Mod.	A	E	F	G	H	M	N	T	U
MC104-AV	59,5	11	28,5	31	4,5	45	45	35	G1/4
MC238-AV	72,5	14	34	38,5	5,5	62	60	46	G3/8
MC202-AV	72,5	14	34	38,5	5,5	62	60	46	G1/2

DIAGRAMS FOR PRESSURISATION TIMES

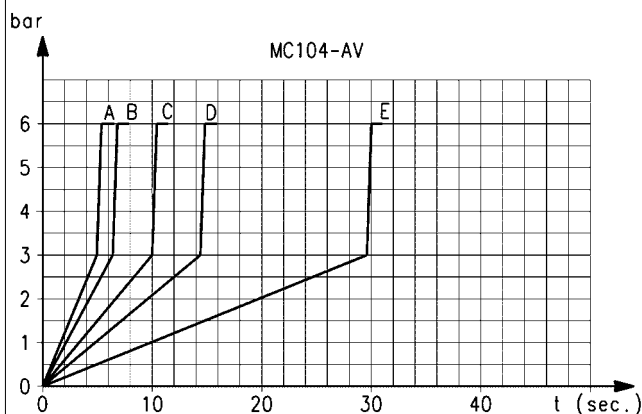


Pressurisation times as to the n° of turns of the regulation screw, with downstream volume of 5 litres. A = 5 turns - B = 4 turns - C = 3 turns - D = 2 turns - E = 1 turn. "K" = n° of turns of the regulation screw required to obtain the required pressurisation time with an inlet pressure of 6 bar. Variations of the inlet pressure can cause deviations of the pressure time by $\pm 20\%$. $K = t/V$ where: V = volume of the downstream system in litres; t = desired pressuring time in seconds.

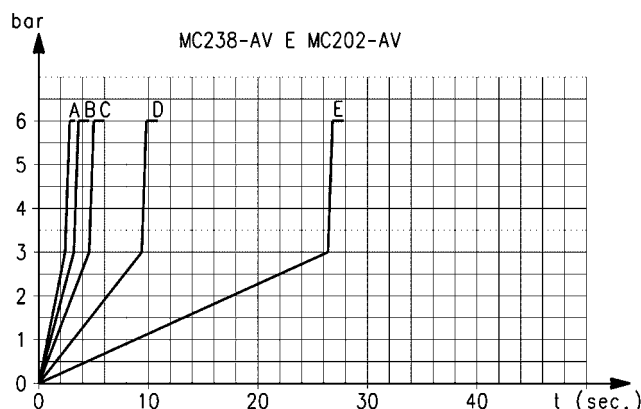

Pressurisation times as to the n° of turns of the regulation screw, with downstream volume of 5 litres. A = 9 turns - B = 7 turns - C = 5 turns - D = 3 turns - E = 1 turn. "K" = n° of turns of the regulation screw required to obtain the required pressurisation time with an inlet pressure of 6 bar. Variations of the inlet pressure can cause deviations of the pressure time by $\pm 20\%$. $K = t/V$ where: V = volume of the downstream system in litres; t = desired pressuring time in seconds.

VARIATION IN PRESSURISATION - Example

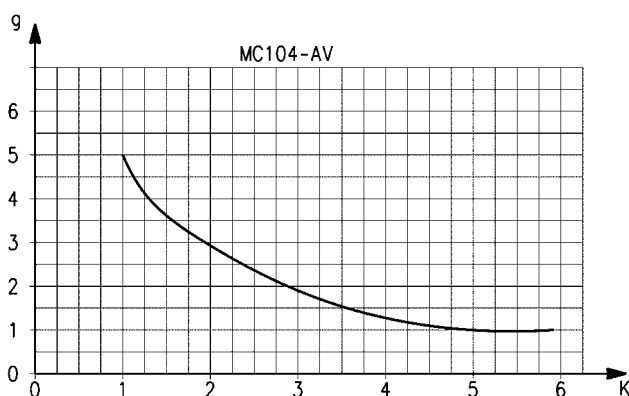

Example: MC104-AV


V = 5 litres

t = 16 seconds

$K = 16/5 = 3,2$

g = number of turns

Using in the graph this value K, the number of turns of the regulation screw will be approx. 1,8.

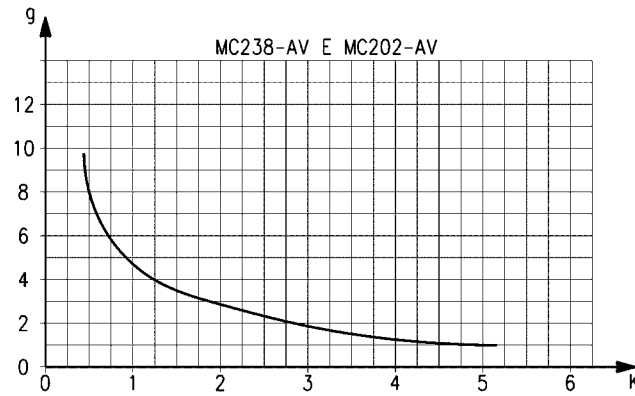

Example: MC238-AV - MC202-AV

V = 5 litres

t = 16 seconds

$K = 16/5 = 3,2$

g = number of turns

Using in the graph this value K, the number of turns of the regulation screw will be approx. 1,8.