



Brand of NTN corporation

Technical data

MUCFBL205

Bearing units




Thermoplastic housing, stainless steel insert ball bearing with socket set screws, seal with slinger, food grease

KIT CONTENT

MUC205FD

VISUAL (S)

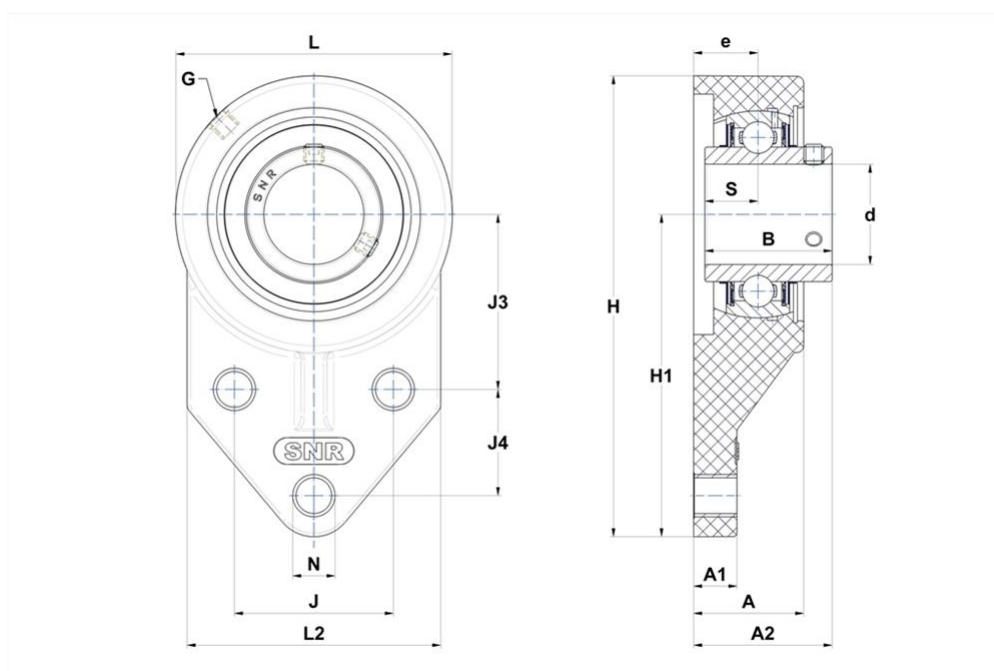

PRODUCT DEFINITION

Brand	SNR
A - Housing height	34 mm
A1 - Housing foot height / flange height	11,4 mm
A2 - Total height from mounting surface	41,6 mm
B - Width of Inner Ring	34,1 mm



NTN Europe

1 rue des Usines · BP 2017 · 74010 Annecy Cedex · France · Tel. +33 (0)4 50 65 30 00
S.A. au capital de 322 639 919 € · RCS ANNECY B 325 821 072 · Id. Fiscale : FR 48 325 821 072
SIRET 325 821 072 00015 · Code APE 2815 Z · Code NACE 28.15

PRODUCT DEFINITION

d - Shaft diameter	25 mm
e - Distance mounting surface to bearing center	21,8 mm
G - Grease fitting	1/4"-28
H - Housing length, width or diameter	120,6 mm
H1 - Distance housing side to centre of bearing insert	85,7 mm
J - Mounting holes distance	41,3 mm
J3 - Distance mounting hole to bearing center	46 mm
J4 - Mounting hole distance	28,6 mm
L - Housing width / diameter	70 mm
L2 - Housing flange width	63,5 mm
N - Mounting hole dimension	10,7 mm
S - Distance front side/bearing centre	14,3 mm

PRODUCT PERFORMANCE

C - Dynamic load rating	11,9 kN
C0 - Static load rating	6,3 kN
Operating temperature min.	-20 °C
Operating temperature max.	100 °C

OTHER FEATURES

Mass	0,3 kg
Recommended tightening torque for set screw	3.9 N-m

