




Bubblemat Connect

Interlocking tiles with high anti-fatigue properties



- Durable anti-fatigue matting system.
- Raised bubbled surface to stimulate blood circulation and reduction of fatigue.
- Interlocking system provides flexibility in the type of shape that can be created.
- Soft but sturdy rubber material offers protection from adverse effects from cold, hard concrete floors.
- Rubber is naturally slip resistant.

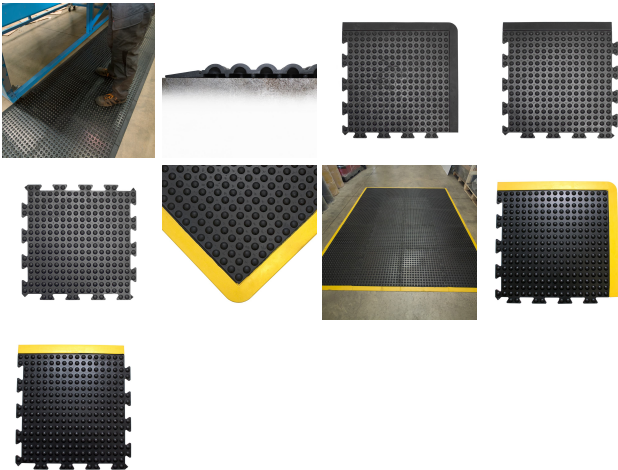

Parts

Part Number	Size	Colour	Weight
BF010007	50 cm x 50 cm (Middle)	Black	2.05 kg
BF010008	50 cm x 50 cm (End)	Black	2.05 kg
BF010009	50 cm x 50 cm (Corner)	Black	2.05 kg
BF010708	50 cm x 50 cm (End)	Black/Yellow	2.05 kg
BF010709	50 cm x 50 cm (Corner)	Black/Yellow	2.05 kg

Technical Specification

Material	Natural rubber
Surface Finish	Bubble
Product Height	13.5 mm
Product Weight	5.75kg
Operating Temperature	-30°C to +50°C
Resistance to Chemicals	Not resistant to fat and mineral oil
Environmental Resistance	Suitable for dry indoor environments
UV Resistance	Yes

Technical Specification

Installation Method	Loose lay interlocking mats
Cleaning Method	Use a high pressure hose (not exceeding 60psi) to remove the dirt and debris on the mats. For best results use a mild detergent (pH 4.0-9.0) to clean the mats. Do not use steam or degreasers or caustic chemicals. Do not mechanically scrub the mats.
Country of Origin	Sri Lanka
Tensile Strength	3 MPa
250%	Manufacturing process
Compression moulding	

Get in touch | To order FREE samples or arrange a site visit please call +44 (0)116 240 1088 or email sales@cobaeurope.com