


Two Hand Control Valve Series *VR51*

How to Order

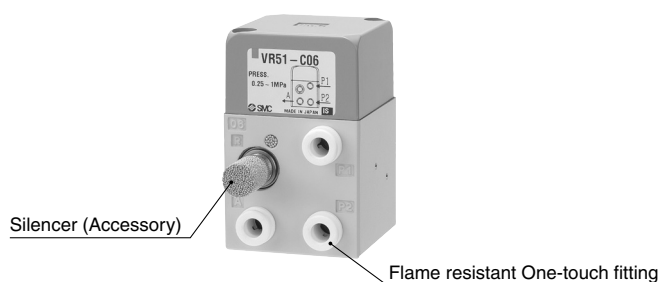

VR51 — **C06** **B**

Two hand control valve

Option

Nil	None
B	With bracket

Connection piping size

C06	Flame resistant One-touch fitting ø6
C07	Flame resistant One-touch fitting ø1/4

With bracket (Option)



Back side mounting



Bottom mounting

Specifications

Fluid		Air		
Operating pressure		0.25 to 1 MPa		
Proof pressure		1.5 MPa		
Ambient and fluid temperature		−5 to 60°C (with no freezing)		
Flow characteristics		C[dm³/(s·bar)]	b	Cv
	P→A	0.3	—	—
	A→R	1.0	0.12	0.25
Port size	Metric size	ø6		
	Inch size	ø1/4		
Applicable tubing material <small>Note)</small>		Nylon, Soft nylon, Polyurethane, Flame resistant (FR) soft nylon, FR double layer, FR double layer polyurethane		
Weight		340 g		
Accessory	Silencer	Part No.: AN101-01		
Option	Bracket	Part No.: VR51B		

Note) In the case of using soft nylon or polyurethane tubing, use caution when the maximum operating pressure of the tubing is used.

Example of a Basic Circuit Diagram

