


Valve plug connector, series CON-VP

- Socket form B 2+E angled 90°
- open cable ends 3-pin
- with cable
- unshielded

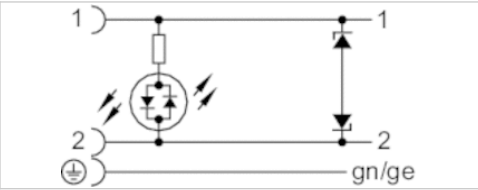

Ambient temperature min./max.	-20 ... 80 °C
Operational voltage	24 V AC/DC
Protection class	IP67
Protective circuit	Z-diode
Wire cross-section	0,75 mm²
Mounting screw tightening torque	0,4 Nm
Weight	See table below

Technical data

Part No.	Max. current	Contact assignment	LED status display	Number of wires	Cable-Ø	Cable length	Weight	Fig.
1834484152	10 A	2+E	Yellow	3	5,9 mm	3 m	0,2 kg	Fig. 1
1834484153	10 A	2+E	Yellow	3	5,9 mm	3 m	0,2 kg	Fig. 2
1834484154	10 A	2+E	Yellow	3	5,9 mm	5 m	0,31 kg	Fig. 1
1834484155	10 A	2+E	Yellow	3	5,9 mm	5 m	0,31 kg	Fig. 2

Scope of delivery incl. flat gasket

Technical information


The specified protection class is only valid in assembled and tested state.

Technical information

Material	
Seals	caoutchouc/butadiene caoutchouc
Cable sheath	Polyvinyl chloride


Dimensions

Fig. 1

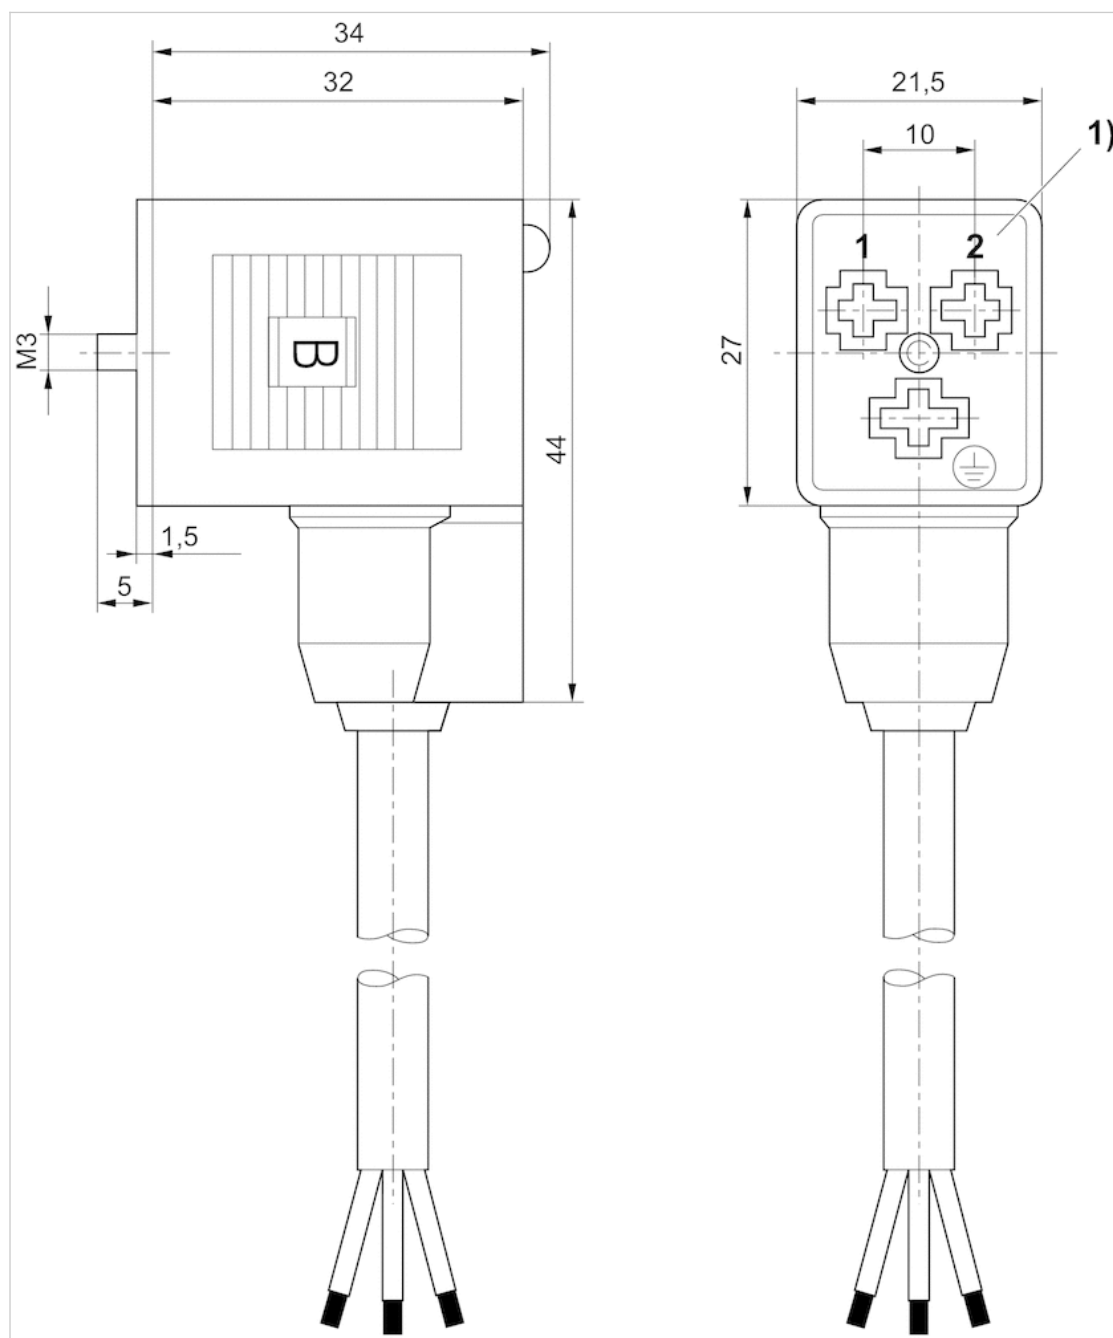

1) 0° female insert

Fig. 2

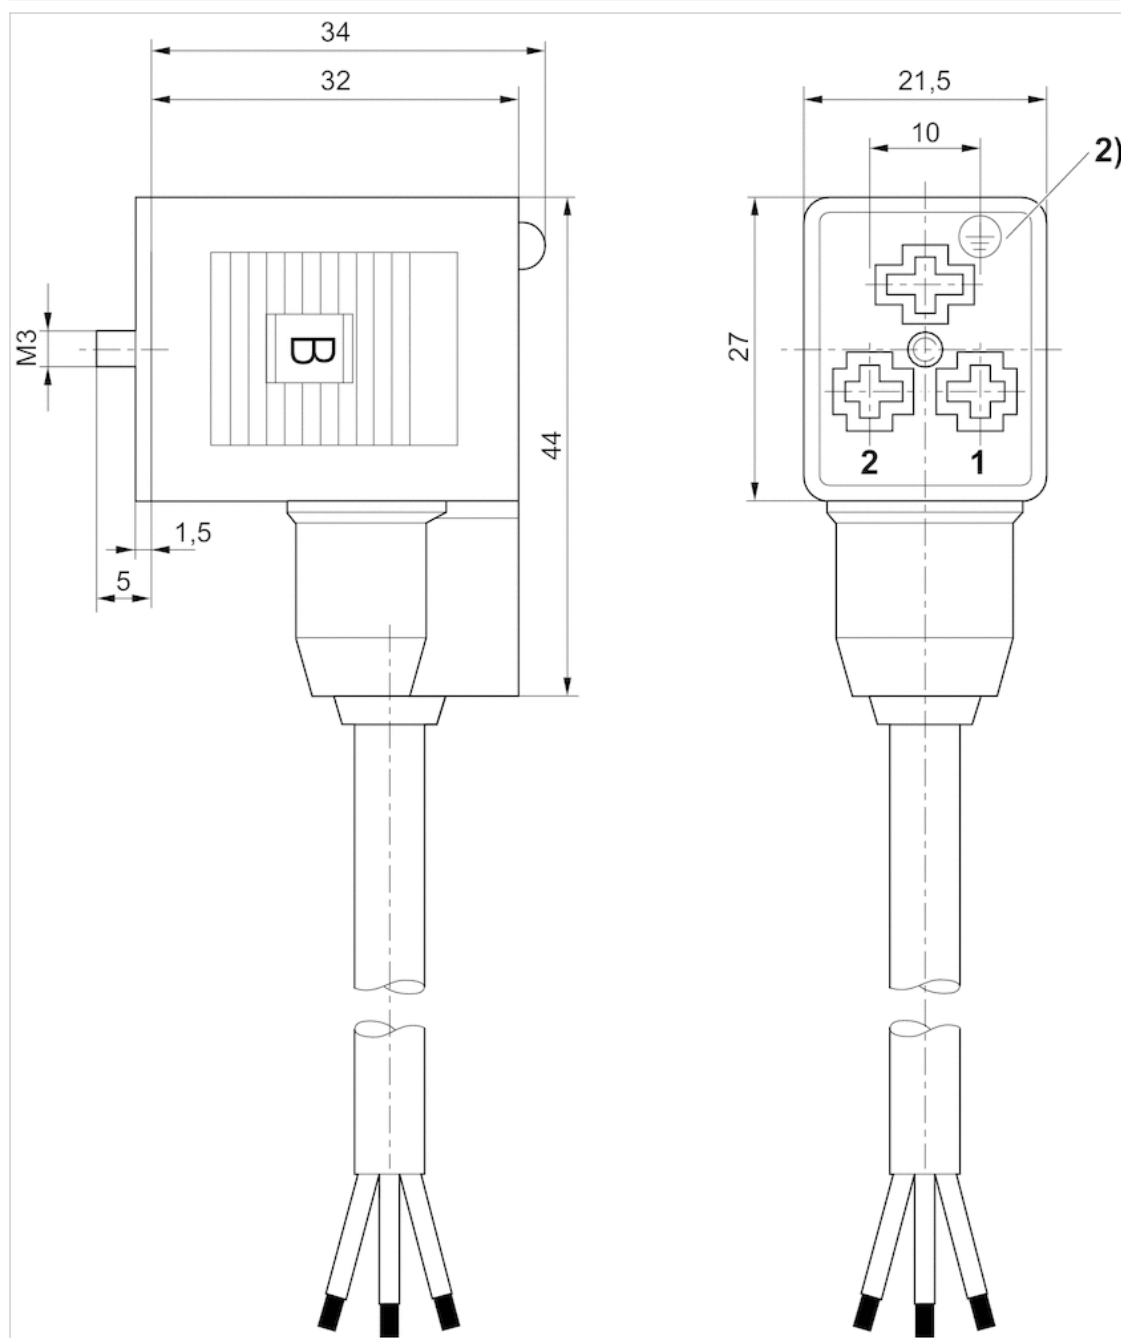

2) 180° female insert