

FEATURES

- LPCB approved to EN54 part 3, 5 and 7
- 7 modes of detection from 1 device
- Self calibrates every 6 hours
- 1 detector to suit all applications
- Sounder built into the detectors
- Built in selectable end of line
- Fire and fault indication

SPECIFICATION

- Operating voltage ~ 18 - 35V DC
- Operating temperature ~ -10°C to + 50°C
- ABS flame retardant
- Coloured white
- IP21




DETECTORS AND CALL POINTS

Order code	Description	Sound output dB @ 1m	Wgt (kg)
FST-CHS	Heat and smoke detector c/w base	N/A	0.27
FST-CHS/SND	Heat and smoke detector c/w integral sounder and base	90 (HIGH) 75 (LOW)	0.27
FST-BG	Re-settable call point c/w back box	N/A	0.28

DIMENSIONS (MM)

Order code	A	B	C	Dia
FST-CHS	-	-	61.5	105
FST-CHS/SND	-	-	61.5	105
FST-BG	85	85	52	-

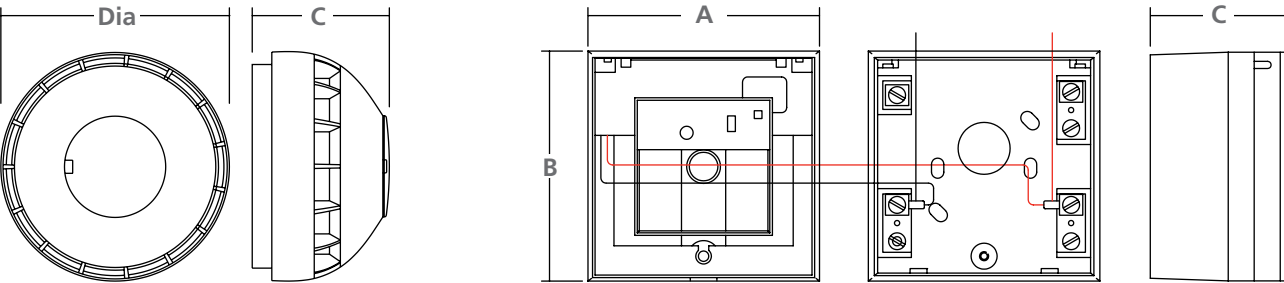

FEATURES

- LPCB approved to EN54 part 3
- Stand alone sounder and strobes
- Wired to a zone
- Built in selectable end of line
- High sound output

SPECIFICATION

- Operating voltage ~ 18 - 35V DC
- Operating temperature ~ -10°C to + 50°C
- ABS flame retardant
- Coloured red as standard
- IP21

OPTIONS

- W White



SOUNDERS AND STROBES

Order code	Description	Sound output dB @ 1m	Wgt (kg)
FST-90S/R	Sounder	85	0.25
FST-DBS	High output sounder	103	0.35
FST-95S/STR	Sounder/strobe	90	0.32

DIMENSIONS (MM)

Order code	A	B	C	Dia
FST-90S/R	85	85	60	-
FST-95S/STR	-	-	50	110
FST-DBS	-	-	60	100

